

N 30, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B3CCCOANOB









ncluded accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1608BX0 Full ext rails, level independent, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z11GU20X0 Glasspan, Z11TI15X0 Cliprails, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CV10A0 Multipurpose pan, enamelled, Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and roasting grid (standard)

Built-in Slide&Hide $^{\tiny 0}$ oven with fixed handle - unrestricted access to the oven interior thanks to the fully retracting oven door

- $\sqrt{\text{Slide\&Hide}^{\text{@}}}$ The fully retracting oven door.
- $\sqrt{\mbox{CircoTherm}^{\otimes}}$ Smart hot-air solution that lets you bake on up to three levels at once.
- $\sqrt{\mbox{ LED-Display}}$ simple, straightforward for clear reading

Features

Technical Data Built-in / Free-standing:	
Dimensions:	
Dimensions of the packed product (HxWxD): $.660 \times 660 \times 690 \text{ mm}$	
Control Panel Material:Stainless steel	
Door Material:	
Net weight:	
Usable volume (of cavity) - cavity 1:	
Cooking method: Full width grill, Hotair gentle, Hot Air,	
Conventional heat, Hot air grilling	
Length electrical supply cord:	
EAN code:	
Number of cavities (2010/30/EC):	
Energy efficiency rating: A	
Energy consumption per cycle conventional (2010/30/EC): 1.04 kWh/cycle	
Energy consumption per cycle forced air convection	
(2010/30/EC):	
Energy efficiency index (2010/30/EC):95.3 %	
Connection Rating:	
Fuse protection:	
Voltage:	
Frequency:	
Plug type:	
(electrical connection by electrician)	
Included accessories:2 x combination grid, 1 x universal pan	





N 30, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B3CCCOANOB

Features

Design

- LED Display (Red)
- Bevelled oval controls, Retractable controls dials, oval With Steel
- Slide&Hide® with fixed handle
- Cavity inner surface: enamel anthracite
- Bar handle
- 4 shelf positions

Features

- Heating up indicator
- Automatic start
- Control panel lock
- Interior halogen light

Cleaning

• Full glass inner door

Programmes/functions

- Oven with 5 main functions heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® gentle
- Cooling fan
- Temperature range 50 °C 275 °C

Accessories

ullet 2 x combination grid, 1 x universal pan

Performance/technical information

- Cavity volume: 71 litre
- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode:1.04 kWh
- \bullet Energy consumption per cycle in fan-forced convection mode:0.81 $\ensuremath{\mathrm{kWh}}$
- Number of cavities: Main cavity Heat source: electrical Cavity volume:71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Ventilation requirements please refer to the installation manual prior to fitting




N 30, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B3CCCOANOB

Dimensioned drawings


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness		
	fitted	flush	
Induction hob	37 mm	38 mm	
Full surface Induction hob	47 mm	48 mm	
Gas hob	30 mm	38 mm	
Electric hob	27 mm	30 mm	

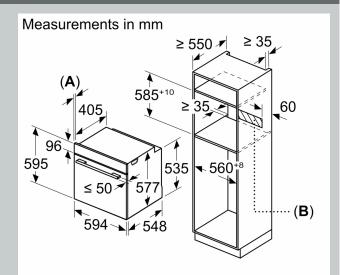

A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

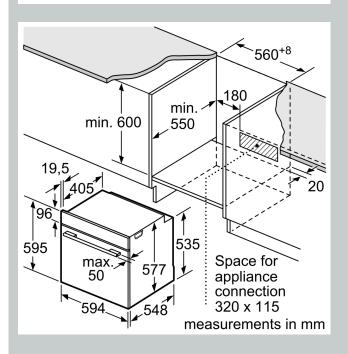





Dimensioned drawings

