

N 90, Built-in oven with added steam function, 60 x 60 cm,
Stainless steel
B47VS22N0



COOKING PASSION SINCE 1877



A+

Features

Technical Data

Color / Material Front : Stainless steel
Built-in / Free-standing : Built-in
Integrated Cleaning system : Catalytic partial, Hydrolytic
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 mm
Dimensions : 595 x 596 x 548 mm
Dimensions of the packed product (HxWxD) : 675 x 690 x 660 mm
Control Panel Material : Stainless steel
Door Material : Glass
Net weight : 39.4 kg
Usable volume (of cavity) - cavity 1 : 71 l
Cooking method : , 4D Hotair, Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, warming
Oven control : electronic
Number of interior lights : 1
Approval certificates : CE, VDE
Length electrical supply cord : 120 cm
EAN code : 4242004181651
Number of cavities (2010/30/EC) : 1
Energy efficiency rating : A+
Energy consumption per cycle conventional (2010/30/EC) : 0.87 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69 kWh/cycle
Energy efficiency index (2010/30/EC) : 81.2 %
Connection Rating : 3600 W
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 60; 50 Hz
Plug type : Gardy plug w/ earthing
Included accessories : 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Optional accessories


Z11AB15A0 Baking tray, non-stick ceramic coated
Z11CR10X0 Baking and roasting grid (standard)
Z11SZ00X0 SeamlessCombination mounting kit
Z11SZ80X0 SeamlessCombination 60 + 29cm
Z11SZ90X0 SeamlessCombination 60 + 45cm
Z11TC10X0 ComfortFlex Rail (1 level)
Z11TC16X0 ComfortFlex Rail (1 level) and racks
Z11TF36X0 3 level telescopic rails, full ext
Z12CB10A0 Baking tray, anthracite enamelled
Z12CM10A0 Moussaka pan, anthracite enamelled



4 242004 181651

N 90, Built-in oven with added steam function, 60
x 60 cm, Stainless steel
B47VS22N0

Dimensioned drawings

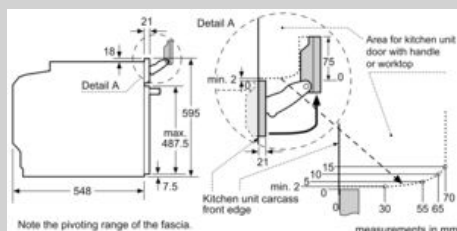

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type | min. worktop thickness | |
|----------------------------|------------------------|-------|
| | fitted | flush |
| Induction hob | 37 mm | 38 mm |
| Full surface Induction hob | 47 mm | 48 mm |
| Gas hob | 30 mm | 38 mm |
| Electric hob | 27 mm | 30 mm |

