

N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HN0B





Included accessories

 $1 \times \text{enamel baking tray}$, $1 \times \text{combination grid}$, $2 \times \text{universal pan}$

Optional accessories

Z11TE25X0 2 level telescopic shelf rails, Z11TF25X0 2 level telescopic shelf rails, full ext, Z11TF36X0 3 level telescopic rails, full ext, Z11TI15X0 Cliprails, Z11TJ25X0 2 level telescopic rails incl 1VarioClip, Z11TJ35X0 3 level telescopic rails incl 1VarioClip, Z1352X0 Pizza pan, enamelled, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens, Z11CB10E0 Baking tray, enamelled, Z11CR10X0 Baking and roasting grid (standard), Z11CU10E0 Multipurpose pan, enamelled, Z11GT10X3 Glass roasting dish, 5,4l, Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated

Built-in oven with Slide&Hide $^{\scriptsize 0}$ - unrestricted access to the oven interior

- $\sqrt{\mbox{ Eco Clean}}$ Eco Clean with Base Clean the duo that makes oven cleaning easier
- $\sqrt{\,}$ LCD-Display simple, straightforward with large characters for clear reading
- $\sqrt{\,}$ Clip-on Rail easily removed and installed telescopic rails for flexible use on all shelf levels

Features

Technical Data
Built-in / Free-standing:
Integrated Cleaning system: EcoClean
programme
Required niche size for installation (HxWxD): 585-595 x 560-568 x
550 mm
Dimensions:
Dimensions of the packed product (HxWxD): . 670 x 660 x 700 mm
Control Panel Material:
Door Material: Glass
Net weight:
Usable volume (of cavity) - cavity 1:
Cooking method: Bread Baking Setting, Full width grill, Hotair
gentle, Hot Air, Conventional heat, Pizza setting, Bottom heat, Hot
air grilling
First cavity material:Other
Oven control: electronic
Length electrical supply cord: 120.0 cm
EAN code:4242004224341
Number of cavities (2010/30/EC):
Energy efficiency rating: A
Energy consumption per cycle conventional (2010/30/EC): 1.04
kWh/cycle
Energy consumption per cycle forced air convection
(2010/30/EC):
Energy efficiency index (2010/30/EC):95.3 %
Connection Rating:
Fuse protection:
Voltage:
Frequency:50; 60 Hz
Plug type:
(electrical connection by electrician)
Included accessories:
combination grid, 2 x universal pan





N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HN0B

Features

Design

- LCD-Display Control (white)
- Cavity inner surface: enamel grey
- Bevelled oval controls, Retractable controls dials, oval
- Slide&Hide® with rotating handle
- We recommend you to choose complementary products within N50, in order to assure an optimal design combination of your Built-In appliances.

Features

- · Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Single-point meat probe
- Interior halogen light, On/off button
- Electronic clock timer

Cleaning

- EcoCleanDirect : ceiling, back panel, side liners
- EcoClean programme, Base Clean programme
- Full glass inner door

Programmes/functions

- Oven with 8 cooking functions:, 8 cooking functions: heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bread baking, Bottom heat, CircoTherm® gentle
- Rapid heat
- Cooling fan

Accessories

- 1 Clip rail, Stop function
- 1 x enamel baking tray, 1 x combination grid, 2 x universal pan

Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode: 1.04 kWh
- \bullet Energy consumption per cycle in fan-forced convection mode: 0.81 $\,$ kWh $\,$
- Number of cavities: Main cavity
- Heat source: electrical
- Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- • Niche dimension (hxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual




N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HN0B

Dimensioned drawings


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm



A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

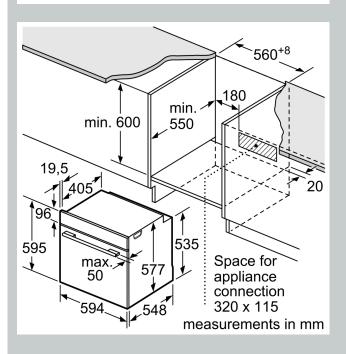





Dimensioned drawings

