

N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B57CR22N1B











Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z11CG10X0 Barbecue-Set, Z11CR10X0 Baking and roasting grid (standard), Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ80X0 SeamlessCombination 60 + 29cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z11TC10X0 ComfortFlex Rail (1 level), Z11TC16X0 ComfortFlex Rail (1 level) and racks, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z12TF16X0 1 level telescopic rails, full ext,pyro, Z13CV05S0 Cover Strip, Z18C60X0 Cookbook, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens, Z99RX70X0 Connecting cable 3m

Built-in oven with Slide&Hide® - unrestricted access to the oven interior

- $\sqrt{\mbox{Slide\&Hide@-}}$ unrestricted access in the oven interior and easy handling due to rotating handle
- $\sqrt{\rm CircoTherm^{\it @}}$ our smart hot-air solution for simultaneous baking and roasting on up to four levels
- $\sqrt{}$ Dual cleaning options: Pyrolytic cleaning programmes just let the oven interior clean itself. EasyClean the quick and easy option for day to day maintenance.
- $\sqrt{\,}$ Shift Control fast navigation through menus and simple operation with the TFT display.

Features

Technical Data
Built-in / Free-standing:
Integrated Cleaning system:
Required niche size for installation (HxWxD): 585-595 x 560-568 x
550 mm
Dimensions:
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm
Control Panel Material:
Door Material:
Net weight:
Usable volume (of cavity) - cavity 1:
Cooking method: CircoTherm®, Bread Baking Setting, Full width
grill, Dough proving setting, Hot Air-Eco, Half width grill,
Conventional heat, Conventional heat ECO, Pizza setting, low
temperature cooking, Bottom heat, Hot air grilling
Oven control: electronic
Length electrical supply cord:
EAN code:
Number of cavities (2010/30/EC):
Energy efficiency rating:
Energy consumption per cycle conventional (2010/30/EC): 0.87
kWh/cycle
Energy consumption per cycle forced air convection
(2010/30/EC):
Energy efficiency index (2010/30/EC):
Connection Rating:
Fuse protection:
Voltage:
Frequency:
Plug type: no plug
(electrical connection by electrician)
Included accessories:2 x combination grid, 1 x universal pan





N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B57CR22N1B

Features

Design

- 2.5" TFT colour display
- Illuminated Shift Control
- Cavity inner surface: Enamel anthracite
- Slide&Hide® with rotating handle

Features

- Control panel lock Automatic safety switch off Residual heat indicator Start button Door contact switch
- Temperature proposal Actual temperature display Heating up indicator Sabbath setting
- Interior halogen light, On/off button
- Quadruple glazed door

Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

Programmes/functions

- 12 heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Dough proving
- Rapid heat
- Cooling fan

Accessories

• 2 x combination grid, 1 x universal pan


Performance/technical information


- Energy efficiency rating (acc. EU Nr. 65/2014): A+ Energy consumption per cycle in conventional mode: 0.87 kWh Energy consumption per cycle in fan-forced convection mode: 0.69 kWh Number of cavities: Main cavity Heat source: electrical Cavity yelluma: 71 litro
- Total connected load electric: 2.99 KW
- Temperature range 40 °C 275 °C
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 596 mm x 548 mm
- • Niche dimension (hxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual




N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B57CR22N1B

Dimensioned drawings

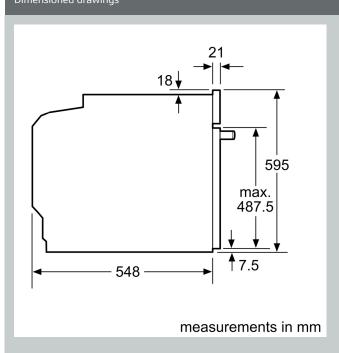





If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	fitted 37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm