

# N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CS71G0B







#### Included accessories

2 x combination grid, 1 x universal pan

#### Optional accessories

Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV06S0 Decor strip, Z1608CX0 Full ext rails, level independent, pyro, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray, Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CG10X1 AirFry & Grill Set, Z11CR10X0 Baking and roasting grid (standard), Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ80G0 SeamlessCombination 60 + 29cm, Z11SZ90G0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z1913X0 Baking Stone

Built-in oven with Slide & Hide $^{\odot}$  - an easy to handle door that gently disappears under the oven. Home Connect - control your oven via the App.

- $\sqrt{4.1\text{-inch}}$  Full Touch TFT Display: easy, intuitive menu for smart and enjoyable cooking.
- $\sqrt{\,}$  Slide & Hide®: the easy-to-handle oven door that slides away for unrestricted access.
- $\sqrt{}$  Pyrolytic Self-Cleaning with Easy Clean: the perfect cleaning partnership.
- $\sqrt{}$  Soft Open & Discounting Sort Special Sp
- $\sqrt{\mbox{ Favourites:}}$  save and and manage your preferred settings.

#### Features

| Technical Data  Built-in / Free-standing:                        |
|--|
| Dimensions:  |
| warming Length electrical supply cord:                           |
| Energy consumption per cycle forced air convection (2010/30/EC): |





# N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CS71G0B

## Features

 Oven with 15 heating methods: CircoTherm<sup>®</sup>, Top/bottom heat, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm<sup>®</sup> intensive, Bread baking, Bottom heat, Low temperature cooking, Dough proving, Plate warming setting, Keep warm, CircoTherm<sup>®</sup> gentle, Conventional heat gentle, Air fry

#### Design

- Graphite-Grey Edition
- Touch control With Steel Trim
- Cavity inner surface: enamel anthracite

#### Features

- HomeConnect ready on WLAN
- Oven Assistant with Voice Control
- Door lock during pyrolytic cleaning
- Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Start button
- · Door contact switch
- Full glass inner door

## Programmes/functions

- $\bullet$  Temperature range 30 °C 230 °C
- LED light, On/off button
- Electronic clock timer
- $\bullet$  Slide&Hide  $\!\!^{\tiny{\circledR}}$  with rotating handle
- SoftClose, SoftOpen
- Quadruple glazed door glazed CoolTouch door
- 30 °C Very low door temperature
- Temperature proposal
- Actual temperature display
- Heating up indicator
- cookControl Plus
- Rapid heat
- Cooling fan
- Stainless-steel fan

## Level independent telescopic rails

- 4 shelf positions
- Available as an accessory, pyrolitic proof

#### Cleaning

- Pyrolytic cleaning
- EasyClean

## Accessories

• 2 x combination grid, 1 x universal pan


#### Performance/technical information

- 120 cm Cable length
- Nominal voltage: 220 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+

- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: Main cavity
- Heat source: electrical
- Cavity volume: 71 litre
- Appliance dimension (hxwxd): 595 mm x 596 mm x 548 mm
- Niche dimension (hxwxd): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Ventilation requirements please refer to the installation manual prior to fitting



# N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CS71G0B

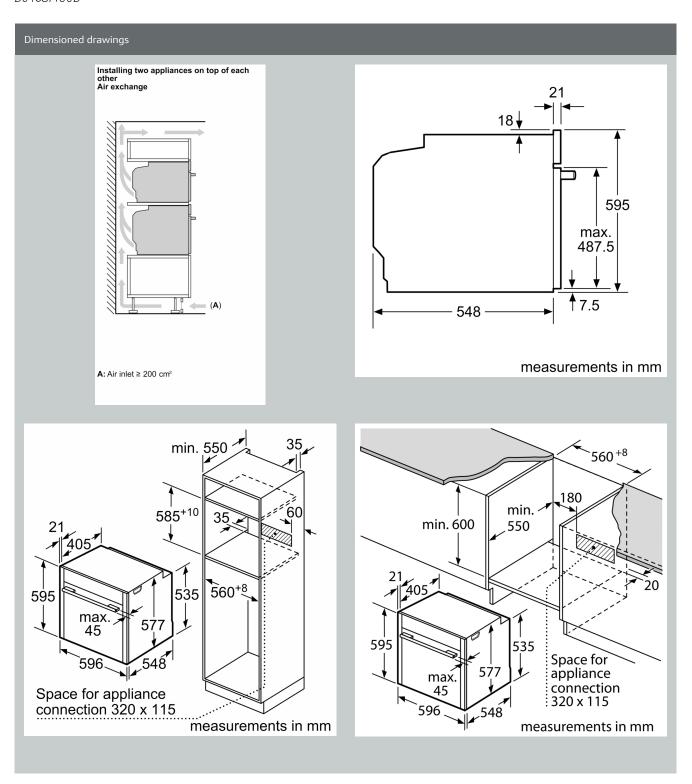



## Dimensioned drawings

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type                      | min. worktop thickness |       |
|-------------------------------|------------------------|-------|
|                               | fitted                 | flush |
| Induction hob                 | 37 mm                  | 38 mm |
| Full surface<br>Induction hob | 47 mm                  | 48 mm |
| Gas hob                       | 30 mm                  | 38 mm |
| Electric hob                  | 27 mm                  | 30 mm |