

N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CT73G0B







Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CG10X1 AirFry & Grill Set, Z11CR10X0 Baking and roasting grid (standard), Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ80G0 SeamlessCombination 60 + 29cm, Z11SZ90G0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray, Z13CR10X0 Baking and roasting grid (steam), Z13CV06S0 Decor strip, Z1608CX0 Full ext rails, level independent, pyro, Z1913X0 Baking Stone

Built-in oven with Slide & Hide[®] - an easy to handle door that gently disappears under the oven. Multipoint Meatprobe with three measuring points and forecast function. Home Connect - control your oven via the App.

- $\sqrt{}$ Premium 6.8-inch Full Touch TFT Display: easy and intuitive interface for maximum comfort.
- $\sqrt{\,}$ Slide & Hide®: the easy-to-handle oven door that slides away for unrestricted access.
- $\sqrt{\mbox{ Pyrolytic Self-Cleaning with Easy Clean: the perfect cleaning partnership.}$
- $\sqrt{}$ Multipoint Meatprobe The three-point thermometer for delicious roasts done how you like!
- $\sqrt{}$ Soft Open & Discounting Sort Series Self-regulating doors for a quieter experience.

Features

T 1 4 15 4		
Technical Data		
Built-in / Free-standing:		
Integrated Cleaning system:		
Required niche size for installation (HxWxD): 585-595 x 56	50-568 x	
550 mm		
Dimensions:	x548 mm	
Dimensions of the packed product (HxWxD):675x660x	k690 mm	
Control Panel Material:Stain	less steel	
Door Material:	Glass	
Net weight:	38.0 ka	
Usable volume (of cavity) - cavity 1:		
Cooking method: CircoTherm®, Air fry, Bread Baking Set		
width grill, Dough proving setting, Hotair gentle, Half width grill,		
Conventional heat, Conventional heat gentle, Pizza setting	J ,	
temperature cooking, Bottom heat, Hot air grilling, pre-he	* *	
warming	ating,	
Length electrical supply cord:	120 cm	
EAN code:		
Number of cavities (2010/30/EC):		
Energy efficiency rating:		
Energy consumption per cycle conventional (2010/30/EC)	: 0.87	
kWh/cycle		
Energy consumption per cycle forced air convection		
(2010/30/EC):		
Energy efficiency index (2010/30/EC):		
Connection Rating:		
Fuse protection:	16 A	
Voltage:2	20-240 V	
Frequency:	50; 60 Hz	
Plug type:	. no plug	
(electrical connection by electrician)		
Included accessories:2 x combination grid, 1 x univ	ersal pan	





N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CT73G0B

Features

 Oven with 15 heating methods: CircoTherm[®], Top/bottom heat, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm[®] intensive, Bread baking, Bottom heat, Low temperature cooking, Dough proving, Plate warming setting, Keep warm, CircoTherm[®] gentle, Conventional heat gentle, Air fry

Design

- Graphite-Grey Edition
- Touch control With Steel Trim
- Cavity inner surface: enamel anthracite

Features

- HomeConnect ready on WLAN
- Oven Assistant with Voice Control
- Door lock during pyrolytic cleaning
- Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Start button
- Door contact switch
- Full glass inner door

Programmes/functions

- \bullet Temperature range 30 °C 230 °C
- LED light, On/off button
- Electronic clock timer
- \bullet Slide&Hide $\!\!^{\tiny{\circledR}}$ with rotating handle
- SoftClose, SoftOpen
- Quadruple glazed door glazed CoolTouch door
- 30 °C Very low door temperature
- Temperature proposal
- Actual temperature display
- Heating up indicator
- meat probe
- cookControl Plus
- Rapid heat
- Cooling fan
- Stainless-steel fan

Level independent telescopic rails

- 4 shelf positions
- Available as an accessory, pyrolitic proof

Cleaning

- Pyrolytic cleaning
- EasyClean

Accessories

 \bullet 2 x combination grid, 1 x universal pan


Performance/technical information

- 120 cm Cable length
- Nominal voltage: 220 240 V
- Total connected load electric: 3.6 KW

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69
- Number of cavities: Main cavity
- Heat source: electrical
- Cavity volume: 71 litre
- Appliance dimension (hxwxd): 595 mm x 596 mm x 548 mm
- Niche dimension (hxwxd): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Ventilation requirements please refer to the installation manual prior to fitting



N 90, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY B64CT73G0B

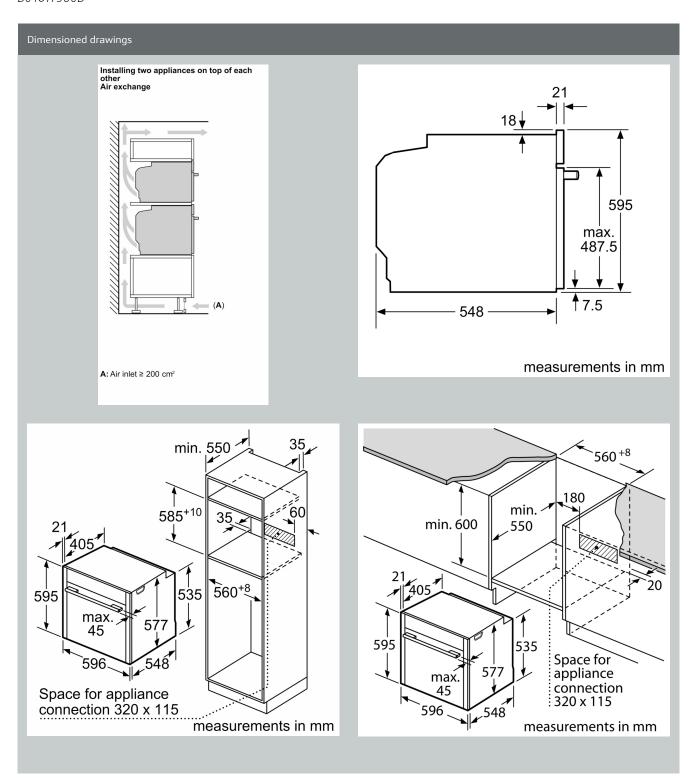



Dimensioned drawings

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm