

N 90, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, FLEX DESIGN B69UV7MY0



*Twist Pad Flex® sold separately



Included accessories

1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CG10X1 AirFry & Grill Set, Z11CR10X0 Baking and roasting grid (standard), Z11SZ00X1 SC FlexDesign mounting kit, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV06S0 Decor strip, Z1608CX0 Full ext rails, level independent, pyro, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z9060AY0 (SC) FlexDesign AG 60 Oven 60, Z9060BY0 (SC) FlexDesign BB 60 Oven 60, Z9060DY0 (SC) FlexDesign DB 60 Oven 60, Z9060MY0 (SC) FlexDesign MS 60 Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0 SC FlexDesign BB 75 WD 14 + 60, Z9075DY0 SC FlexDesign DB 75 WD 14 + 60, Z9075MY0 SC FlexDesign MS 75 WD 14 + 60, Z9098AY0 SC FlexDesign AG 98 60 + MW 38, Z9098BY0 SC FlexDesign BB 98 60 + MW 38, Z9098DY0 SC FlexDesign DB 98 60 + MW 38, Z9098MY0 SC FlexDesign MS 98 60 + MW 38, Z9105AY0 SC FlexDesign AG 105 60 + 45, Z9105BY0 SC FlexDesign BB 105 60 + 45, Z9105DY0 SC FlexDesign DB 105 60 + 45, Z9105MY0 SC FlexDesign MS 105 60 + 45, Z912AAY0 SC FlexDesign AG 120 WD14 + 60 + 45, Z912ABY0 SC FlexDesign BB 120 WD14 + 60 + 45, Z912ADY0 SC FlexDesign DB 120 WD14 + 60 + 45, Z912AMY0 SC FlexDesign MS 120 WD14 + 60 + 45, Z912BAY0 SC FlexDesign AG 120 60+60, Z912BBY0 SC FlexDesign BB 120 60+60, Z912BDY0 SC FlexDesign DB 120 60+60, Z912BMY0 SC FlexDesign MS 120 60+60, Z9801TWAY0 Twist Pad Flex, Anthracite Grey, Z9801TWBY0 Twist Pad Flex, Brushed Bronze, Z9801TWDY0 Twist Pad Flex, Deep Black, Z9801TWMY0 Twist Pad Flex, Metallic Silver, Z990AAY0 SC FlexDesign AG 90 WD 29 + 60, Z990ABY0 SC FlexDesign BB 90

Flex Design built-in oven Vario Steam with Slide & Hide® and Flex Control - changeable design elements with different colours to choose and Premium 6,8" Full Touch TFT Display. Easy to handle door that gently disappears under the oven. Multipoint Meatprobe with forecast function. Home Connect - control your oven via the App.

- ✓ Premium 6.8-inch Full Touch TFT Display: easy and intuitive interface for maximum comfort.
- ✓ Twist Pad Flex®: the easy-to-spin dial for effortless control of your Flex Control appliances.
- ✓ Flex Design: choose a finishing touch to match your kitchen's aesthetic – and change it up later!
- ✓ Seamless Combination with Flex Design: watch your favourite appliances blend together seamlessly.
- ✓ Slide & Hide®: the easy-to-handle oven door that slides away for unrestricted access.

Features

Technical Data

Built-in / Free-standing: Built-in
Integrated Cleaning system: Pyrolytic+Hydrolytic
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Dimensions: 595x596x548 mm
Dimensions of the packed product (HxWxD): 660x660x690 mm
Control Panel Material: Glass
Door Material: Glass
Net weight: 43.1 kg
Usable volume (of cavity) - cavity 1: 71 l
Cooking method: Regeneration, CircoTherm®, Air fry, Bread Baking Setting, Full width grill, Hot air gentle, Half width grill, Conventional heat, Conventional heat gentle, Pizza setting, low temperature cooking, Bottom heat, Hot air grilling, pre-heating, warming
Length electrical supply cord: 120 cm
EAN code: 4242004266419
Number of cavities (2010/30/EC): 1
Energy efficiency rating: A+
Energy consumption per cycle conventional (2010/30/EC): 0.87 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC): 0.69 kWh/cycle
Energy efficiency index (2010/30/EC): 81.2 %
Connection Rating: 3600 W
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: GARDY plug w/ earthing
Included accessories: 1 x enamel baking tray, 1 x combination grid, 1 x universal pan



4 242004 266419

WD 29 + 60, Z990ADY0 SC FlexDesign DB 90 WD 29 + 60,
Z990AMY0 SC FlexDesign MS 90 WD 29 + 60, Z99RX70X0
Connecting cable 3m

installation accessories

Z990ADY0 SC FlexDesign DB 90 WD 29 + 60, Z990AMY0 SC
FlexDesign MS 90 WD 29 + 60, Z11SZ00X1 SC FlexDesign
mounting kit, Z9060AY0 (SC)FlexDesign AG 60 Oven 60,
Z9060BY0 (SC)FlexDesign BB 60 Oven 60, Z9060DY0
(SC)FlexDesign DB 60 Oven 60, Z9060MY0 (SC)FlexDesign MS 60
Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0
SC FlexDesign BB 75 WD 14 + 60, Z9075DY0 SC FlexDesign DB 75
WD 14 + 60, Z912ABY0 SC FlexDesign BB 120 WD14 + 60 + 45,
Z912ADY0 SC FlexDesign DB 120 WD14 + 60 + 45, Z912AMY0 SC
FlexDesign MS 120 WD14 + 60 + 45, Z912BAY0 SC FlexDesign AG
120 60+60, Z912BBY0 SC FlexDesign BB 120 60+60, Z912BDY0
SC FlexDesign DB 120 60+60, Z9075MY0 SC FlexDesign MS 75 WD
14 + 60, Z9098AY0 SC FlexDesign AG 98 60 + MW 38, Z9098BY0
SC FlexDesign BB 98 60 + MW 38, Z9098DY0 SC FlexDesign DB 98
60 + MW 38, Z9098MY0 SC FlexDesign MS 98 60 + MW 38,
Z9105AY0 SC FlexDesign AG 105 60 + 45, Z9105BY0 SC
FlexDesign BB 105 60 + 45, Z9105DY0 SC FlexDesign DB 105 60 +
45, Z9105MY0 SC FlexDesign MS 105 60 + 45, Z912AAY0 SC
FlexDesign AG 120 WD14 + 60 + 45, Z912BMY0 SC FlexDesign MS
120 60+60, Z990AAY0 SC FlexDesign AG 90 WD 29 + 60,
Z990ABY0 SC FlexDesign BB 90 WD 29 + 60

*N 90, BUILT-IN OVEN WITH ADDED STEAM
FUNCTION, 60 X 60 CM, FLEX DESIGN
B69UV7MY0*

Features

Features

- Oven with 21 heating methods: Top/bottom heat, Full surface grill, Centre surface grill, Bread baking, Bottom heat, Low temperature cooking, Plate warming setting, Keep warm, Conventional heat gentle, Reheat with steam, Dough proving, Circo-roasting, Bread Baking Setting, warming, 4D Hot air, Top/bottom heat
- Temperature range 30 °C - 230 °C
- Cavity volume: 71 litre

Level independent telescopic rails

- 4 shelf positions
- 1 Clip rail, full extension, Stop function, pyrolytic proof

Design

- Flex Design
- Touch control With Steel Trim
- Cavity inner surface: enamel anthracite

Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

Programmes/functions

- Oven Assistant with Voice Control
- Electronic clock timer
- Temperature proposal
- Actual temperature display
- Heating up indicator
- meat probe
- Slide&Hide® with rotating handle
- SoftClose, SoftOpen
- cookControl Plus
- Rapid heat
- steam boost - add for 3min intensive steam with a touch of a button.
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- LED light, On/off button
- Water tank empty indicator
- Location of water tank: Outside cavity
- Cooling fan
- Stainless-steel fan
- HomeConnect ready on WLAN

Accessories

- 1 x enamel baking tray, 1 x combination grid, 1 x universal pan
- 30 °C - Very low door temperature
- Quadruple glazed door glazed CoolTouch door
- Door lock during pyrolytic cleaning
- Control panel lock
- Automatic safety switch off




- Residual heat indicator
- Start button
- Door contact switch
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: Main cavity
- Heat source: electrical
- Cavity volume: 71 litre

Performance/technical information


- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Ventilation requirements – please refer to the installation manual prior to fitting

N 90, BUILT-IN OVEN WITH ADDED STEAM
FUNCTION, 60 X 60 CM, FLEX DESIGN
B69UV7MY0

Dimensioned drawings

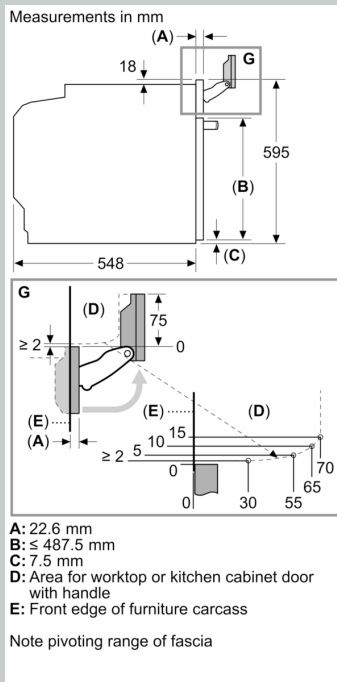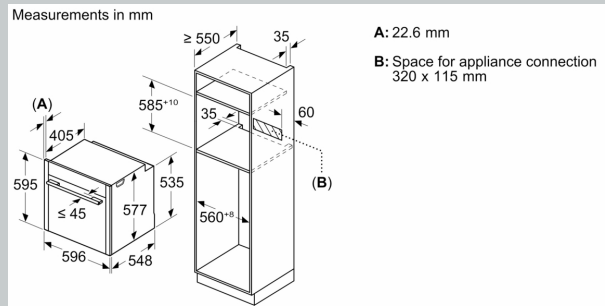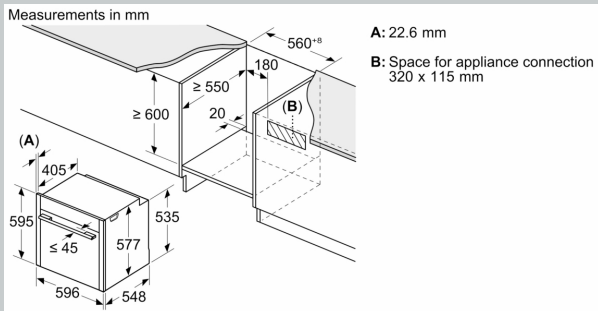


Installing two appliances on top of each
other
Air exchange

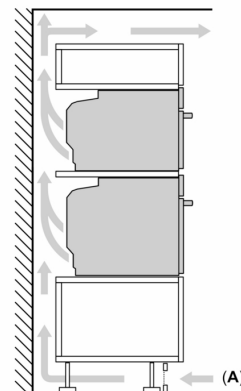

A: Air inlet ≥ 200 cm²

Dimensioned drawings

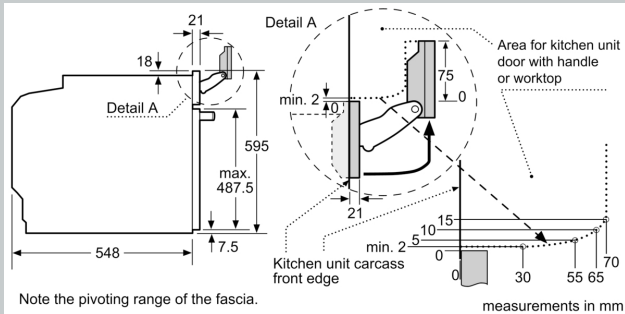

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm