


*N 90, BUILT-IN COMPACT OVEN WITH
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS
STEEL
C18MT37N0B*



Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z18M45X0 Cookbook, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens, Z99RX70X0 Connecting cable 3m, Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ60X0 SeamlessCombination 45 + 14cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z13CV06S0 Decor strip, Z14CR10X0 Baking and roasting grid (microwave)

Compact built-in oven with integral microwave and MultiPoint roast thermometer - even more ways to cook dishes to perfection, quickly and conveniently

- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Combined microwave and oven - the convenient solution to save space and time
- ✓ Eco Clean with Base Clean - the duo that makes oven cleaning easier
- ✓ Full Touch Control – Simple, precise control by touch on the high-resolution TFT colour display.
- ✓ Baking and Roasting Assistant with Automatic Programmes - the duo for optimal baking at your command

Features

Technical Data

Type of micro-wave oven: MW-Combi
Type of control: Electronic
Dimensions: 455x596x548 mm
Cavity dimensions: 237 x 480 x 392 mm
Length electrical supply cord: 150 cm
Net weight: 40.9 kg
Gross weight: 42.2 kg
EAN code: 4242004182344
Maximum micro-wave power: 900 W
Connection Rating: 3600 W
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 60; 50 Hz
Plug type: no plug
(electrical connection by electrician)
Included accessories: 2 x combination grid, 1 x universal pan



N 90, BUILT-IN COMPACT OVEN WITH
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS
STEEL
C18MT37N0B

Features

Programmes/functions

- Rapid heat
- Compact oven with microwave with 13 main functions heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm® intensive, Bottom heat, Low temperature cooking, Dough proving, Plate warming setting, Keep warm
- Additional heating methods with microwave: Microwave, Microwave combination cooking

- Cavity volume: 45 litre
- 150 cm Cable length
- Total connected load electric: 3.6 KW
- Appliance dimension (h x w x d): 455 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Ventilation requirements – please refer to the installation manual prior to fitting

Special features

- EcoCleanDirect : ceiling, back panel, side liners
- EcoClean programme, Base Clean programme
- Number of automatic programmes: 14 PC
- MultiPoint MeatProbe
- Microwave inverter technology
- Stainless-steel fan
- 5.7" TFT colour and graphics display with FullTouch control
- Automatic safety switch off, Start button
- Drop down door, SoftClose, soft opening

Features

- Temperature proposal
- Actual temperature display
- Heating up indicator
- automatic programmes:
- Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Start button
- Door contact switch
- Microwave top door
- Baking and roasting assistant, Automatic programmes
- Temperature range 30 °C - 300 °C
- Max. Power: 900 W; 5 Microwave power settings (90 W, 180 W, 360 W, 600 W, 900 W)
- LED light, On/off button
- Cooling fan
- Info button

Design

- Touch control
- Bar handle
- Cavity inner surface: enamel anthracite
- Electronic clock timer




Standard accessories

- 1 level telescopic shelf, standard extension
- 1 x universal pan, 2 x combination grid


Technical information

N 90, BUILT-IN COMPACT OVEN WITH
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS
STEEL
C18MT37N0B

Dimensioned drawings

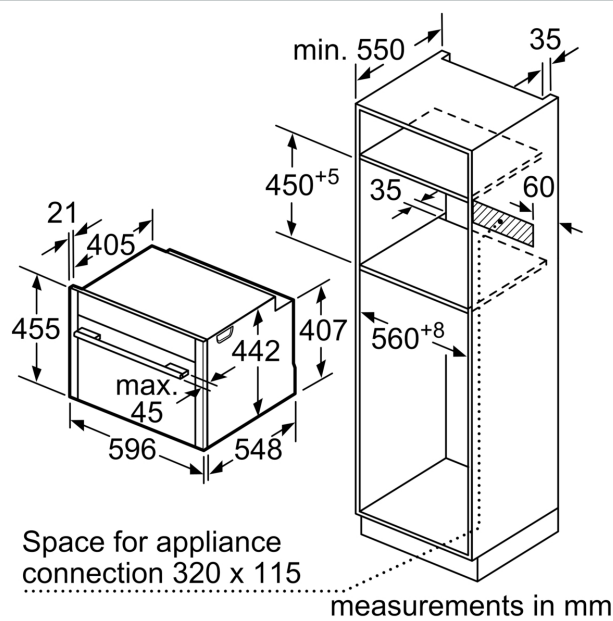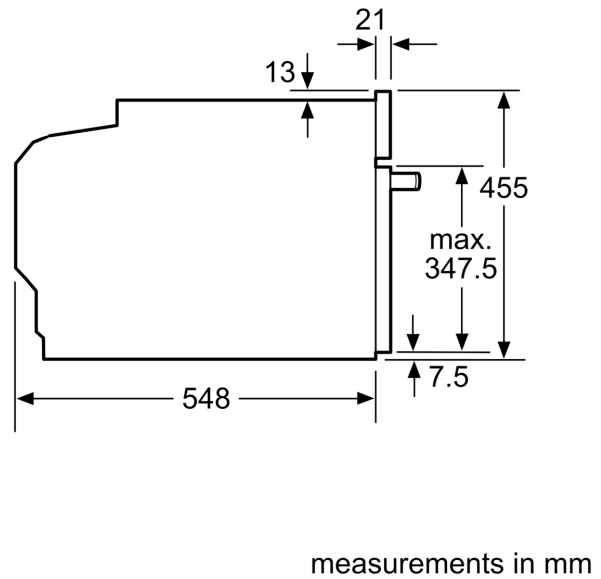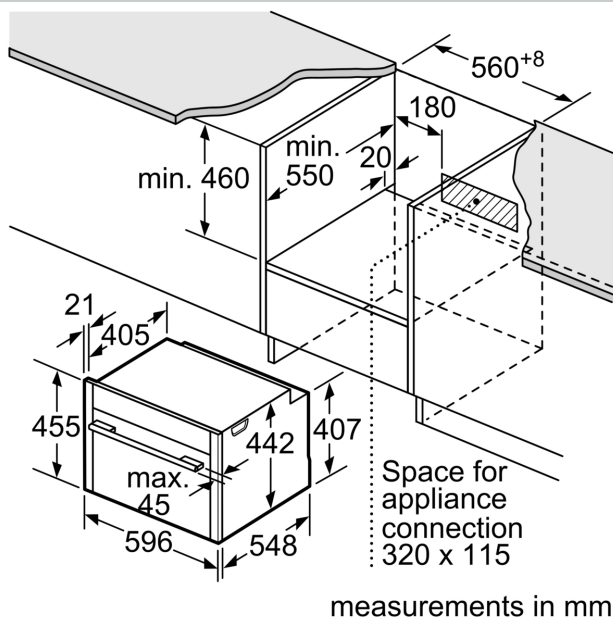

Installation with a hob.

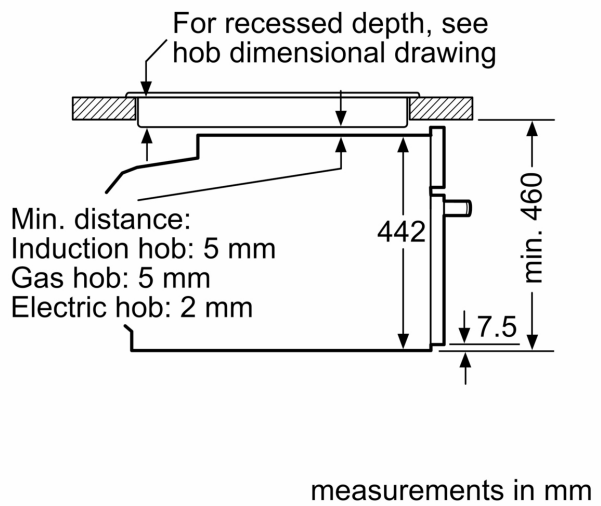

Dimensioned drawings

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm