

# N 90, Combi-steam oven, 60 x 45 cm, Flex Design C29FY5CX0



\*Twist Pad Flex© sold separately



Flex Design compact oven, Intensive Steam, tap water connection and Flex Control - changeable design elements with different colours to choose and Premium 6,8" Full Touch TFT Display. Multipoint Meatprobe with forecast function. Home Connect - control your oven via the App.

- ✓ Premium 6.8-inch Full Touch TFT Display: easy and intuitive interface for maximum comfort.
- ✓ Twist Pad Flex®: the easy-to-spin dial for effortless control of your Flex Control appliances.
- ✓ Flex Design: choose a finishing touch to match your kitchen's aesthetic – and change it up later!
- ✓ Seamless Combination with Flex Design: watch your favourite appliances blend together seamlessly.
- ✓ Flex Control: the high-resolution interface that adapts to you!

## Features

### Technical Data

Built-in / Free-standing : Built-in  
 Door opening : Drop down  
 Required niche size for installation (HxWxD) : 450-455 x 560-568 x 550 mm  
 Dimensions : 455x596x548 mm  
 Dimensions of the packed product (HxWxD) : 530x660x690 mm  
 Control Panel Material : Glass  
 Door Material : Glass  
 Net weight : 32.8 kg  
 Length electrical supply cord : 150 cm  
 EAN code : 4242004267119  
 Fuse protection : 16 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Plug type : Gardy plug w/ earthing  
 Usable volume (of cavity) - NEW (2010/30/EC) : 47 l  
 Energy efficiency rating : A+  
 Energy consumption per cycle conventional (2010/30/EC) : 0.73 kWh/cycle  
 Energy consumption per cycle forced air convection (2010/30/EC) : 0.61 kWh/cycle  
 Energy efficiency index (2010/30/EC) : 81.3 %  
 Included accessories : 1 x grid, 1 x universal pan, 1 x steam container, punched, size XL, 1 x sponge, 1 x steam container, punched, size M, 1 x steam container, unpunched, size M



4 242004 267119

## Optional accessories

Z11CR10X0 : Baking and roasting grid (standard) , Z11SZ00X1 : SC FlexDesign mounting kit, Z1365WX0 : Wireless food thermometer , Z13CV06S0 : Decor strip , Z1608DX0 : Full ext rails, level independent, steam , Z1655CA0 : Air Fry & Grill tray , Z9045AY0 : FlexDesign AG 45 Compact/MW 45 , Z9045BY0 : FlexDesign BB 45 Compact/MW 45 , Z9045DY0 : FlexDesign DB 45 Compact/MW 45 , Z9045MY0 : FlexDesign MS 45 Compact/MW 45 , Z9060AY0 : (SC)FlexDesign AG 60 Oven 60 , Z9060BY0 : (SC)FlexDesign BB 60 Oven 60 , Z9060DY0 : (SC)FlexDesign DB 60 Oven 60 , Z9060MY0 : (SC)FlexDesign MS 60 Oven 60 , Z9075AY0 : SC FlexDesign AG 75 WD 14 + 60 , Z9075BY0 : SC FlexDesign BB 75 WD 14 + 60 , Z9075DY0 : SC FlexDesign DB 75 WD 14 + 60 , Z9075MY0 : SC FlexDesign MS 75 WD 14 + 60 , Z9098AY0 : SC FlexDesign AG 98 60 + MW 38 , Z9098BY0 : SC FlexDesign BB 98 60 + MW 38 , Z9098DY0 : SC FlexDesign DB 98 60 + MW 38 , Z9098MY0 : SC FlexDesign MS 98 60 + MW 38 , Z9105AY0 : SC FlexDesign AG 105 60 + 45 , Z9105BY0 : SC FlexDesign BB 105 60 + 45 , Z9105DY0 : SC FlexDesign DB 105 60 + 45 , Z9105MY0 : SC FlexDesign MS 105 60 + 45 , Z912AAY0 : SC FlexDesign AG 120 WD14 + 60 + 45 , Z912ABY0 : SC FlexDesign BB 120 WD14 + 60 + 45 , Z912ADY0 : SC FlexDesign DB 120 WD14 + 60 + 45 , Z912AMY0 : SC FlexDesign MS 120 WD14 + 60 + 45 , Z912BAY0 : SC FlexDesign AG 120 60+60 , Z912BBY0 : SC FlexDesign BB 120 60+60 , Z912BDY0 : SC FlexDesign DB 120 60+60 , Z912BMY0 : SC FlexDesign MS 120 60+60 , Z9801TWAY0 : Twist Pad Flex, Anthracite Grey , Z9801TWBY0 : Twist Pad Flex, Brushed Bronze , Z9801TWDY0 : Twist Pad Flex, Deep Black , Z9801TWMY0 : Twist Pad Flex, Metallic Silver , Z990AAY0 : SC FlexDesign AG 90 WD 29 + 60 , Z990ABY0 : SC FlexDesign BB 90 WD 29 + 60 , Z990ADY0 : SC FlexDesign DB 90 WD 29 + 60 , Z990AMY0 : SC FlexDesign MS 90 WD 29 + 60 , Z990BAY0 : SC FlexDesign AG 90 45 + 45 , Z990BBY0 : SC FlexDesign BB 90 45 + 45 , Z990BDY0 : SC FlexDesign DB 90 45 + 45 , Z990BMY0 : SC FlexDesign MS 90 45 + 45

# N 90, Combi-steam oven, 60 x 45 cm, Flex Design C29FY5CX0

## Features

- Compact steam oven with 24 heating methods: Top/bottom heat, Full surface grill, Centre surface grill, Bread baking, Bottom heat, Low temperature cooking, Plate warming setting, Keep warm, Conventional heat gentle, Steaming, Reheat with steam, Dough proving, Defrost, Sous-vide cooking, Circo-roasting, Bread Baking Setting, warming, 4D Hot air, Top/bottom heat

## Design

- Flex Design
- Touch control With Steel Trim
- Cavity inner surface: enamel anthracite

## Features

- HomeConnect ready on WLAN
- Oven Assistant with Voice Control
- Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Start button
- Door contact switch
- Full glass inner door

## Programmes/functions

- Temperature range 30 °C - 250 °C
- LED light, On/off button
- Electronic clock timer
- Water inlet system: Fixed connection
- Location of water tank: Outside cavity
- Drop down door, SoftClose, soft opening
- Heat reflective glass
- Triple glazed door glazed CoolTouch door
- Temperature proposal
- Actual temperature display
- Heating up indicator
- meat probe
- cookControl Plus
- Rapid heat
- steam boost - add for 3min intensive steam with a touch of a button.
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- Cooling fan
- Stainless-steel fan

## Level independent telescopic rails

- 3 shelf positions
- 1 Clip rail, full extension, Stop function

## Cleaning

- sides: coating of ceiling, back panel, side liners
- EcoClean programme, Base Clean programme

## Accessories



- 1 x steam container, unpunched, size M, 1 x grid, 1 x sponge, 1 x universal pan, 1 x steam container, punched, size M, 1 x steam container, punched, size XL

## Performance/technical information


- 150 cm Cable Cable length
- Usable length of water hose outside the appliance: 700mm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.3 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+  
Energy consumption per cycle in conventional mode: 0.73 kWh  
Energy consumption per cycle in fan-forced convection mode: 0.61 kWh  
Number of cavities: Main cavity  
Heat source: electrical  
Cavity volume: 47 litre
- Appliance dimension (h x w x d): 455 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Ventilation requirements – please refer to the installation manual prior to fitting

# N 90, Combi-steam oven, 60 x 45 cm, Flex Design C29FY5CX0


## Dimensioned drawings

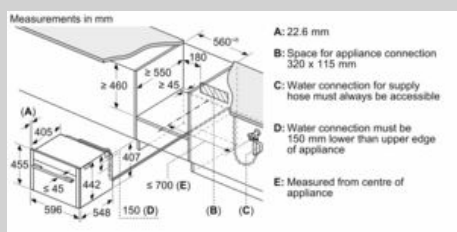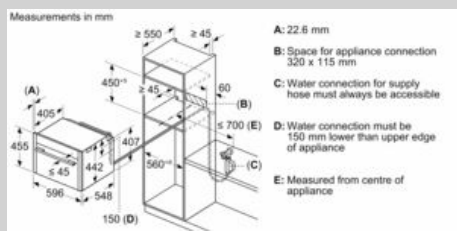

### Installing two appliances on top of each other Air exchange

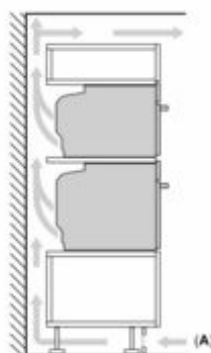


### Installation with a hob.

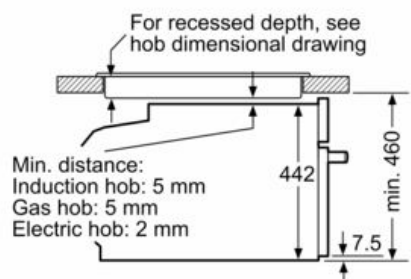

measurements in mm

### Measurements in mm

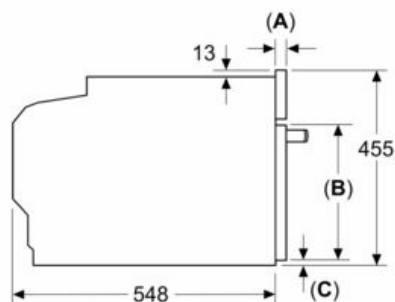

A: 22.6 mm  
B: ≤ 347.5 mm  
C: 7.5 mm