

N 70, telescopic cooker hood, 60 cm, Stainless steel
D46ML54NOB



COOKING PASSION SINCE 1877



B



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Special Noise Insulation – For a quiet cooking area.
- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
Minimum distance above an electric hob : 430 mm
Minimum distance above a gas hob : 650 mm
Net weight : 12.066 kg
Type of control : Electronic
Number of speed settings : 3-stage + 2 intensive
Maximum output air extraction : 381 m³/h
Boost position output recirculating : 628 m³/h
Maximum output recirculating air : 358 m³/h
Boost position air extraction : 677 m³/h
Number of lights : 2
Noise level : 56 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable stainless steel
EAN code : 4242004204237
Connection Rating : 146 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 60; 50 Hz
Plug type : GB plug
Installation typology : Built-in

Optional accessories

Z51ITD1X1	Long Life recirculation kit external
Z51XC1X6	Clean Air Plus recirc. kit external
Z54TC02X0	Standard odor filter (replacement)
Z54TH60D0	Design Handle strip
Z54TL60X0	Lowering frame
Z54TS02X0	Standard recirculation kit



4 242004 204237

N 70, telescopic cooker hood, 60 cm, Stainless steel
D46ML54NOB



COOKING PASSION SINCE 1877

Features

Features

- 7 segment LED display
- 2 x LED lights
- softLight with dimmer function
- 2 metal grease filter cassettes
- Saturation indicator for grease filter
- metal grease filter
- 3 power levels and 2 intensive settings
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Additional noise insulation
- Noise reduction function

Design







- Telescopic hood
- Stainless steel
- Standard design
- Soft touch control
- Electronic controls
- Neutral white lights

Performance/technical information

- Installation system: Telescopic comfort installat.
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 381 m³/h
Intensive 677 m³/h
- Power rating: 146 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 56 dB (A) re 1pW
- Noise max. Normal Level: 56 dB*
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 358 m³/h
Intensive: 628 m³/h
Noise level in recirculation mode:
Max. normal use: 60 dB(A) re 1 pW
Intensive: 71 dB(A) re 1 pW
- Light Intensity: 711 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.75 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 426-426 x 598 x 290 mm
- Dimensions recirculating (HxWxD): 426-426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 41.3 kWh/year*

N 70, telescopic cooker hood, 60 cm, Stainless steel
D46ML54NOB

Dimensioned drawings

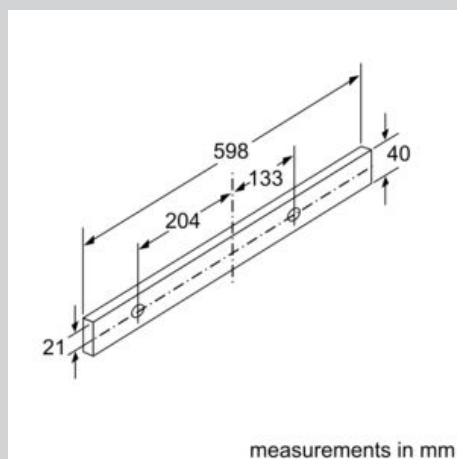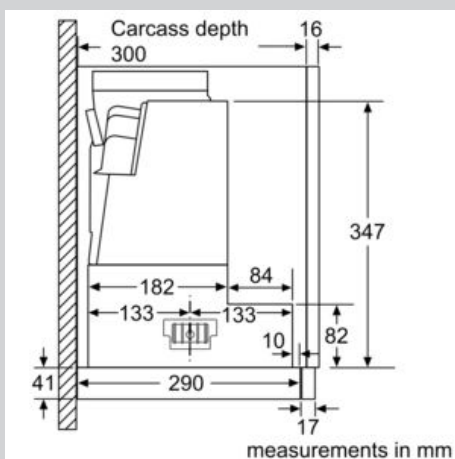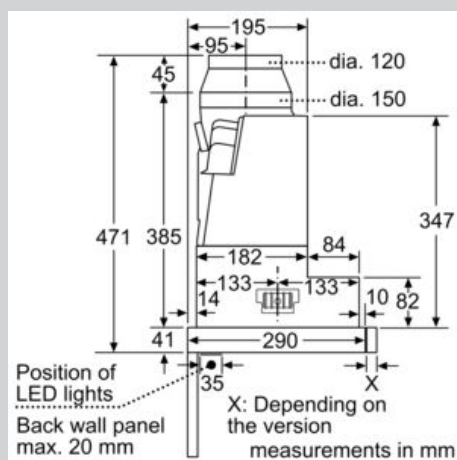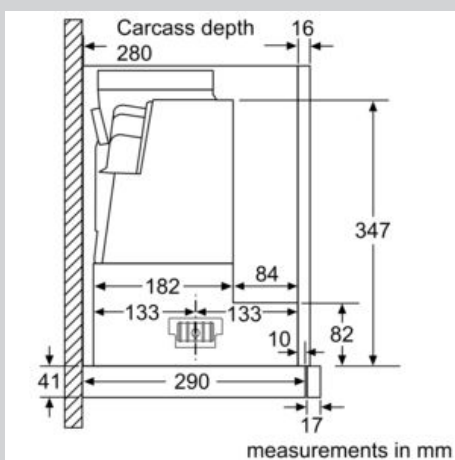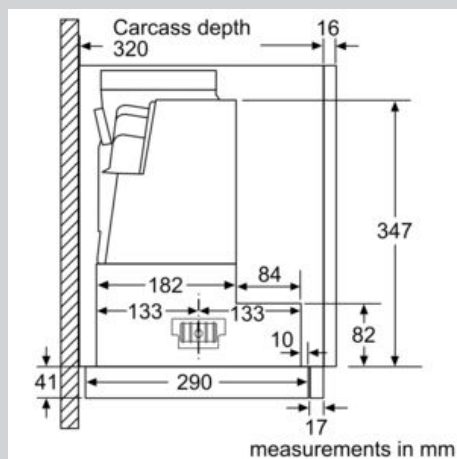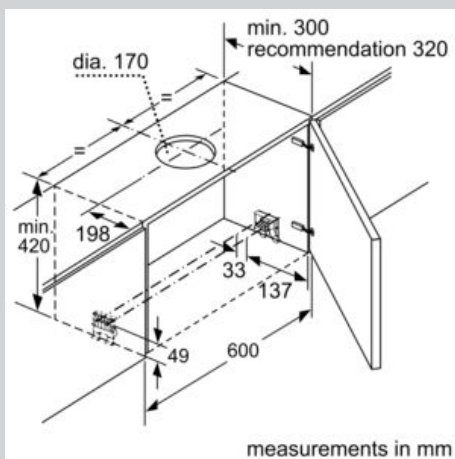

N 70, telescopic cooker hood, 60 cm, Stainless steel
D46ML54NOB

Dimensioned drawings

