

N 90, telescopic cooker hood, 90 cm, Stainless steel
D49PU54X0B



COOKING PASSION SINCE 1877



B



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Oven fit: bring harmony to your kitchen
- ✓ Automatic Air Sensor – Adjusts the extraction rate automatically.
- ✓ Special Noise Insulation – For a quiet cooking area.
- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
Minimum distance above an electric hob : 430 mm
Minimum distance above a gas hob : 650 mm
Net weight : 15.1 kg
Type of control : Electronic
Number of speed settings : 3-stage + 2 intensive
Maximum output air extraction : 395 m³/h
Boost position output recirculating : 628 m³/h
Maximum output recirculating air : 358 m³/h
Boost position air extraction : 708 m³/h
Number of lights : 2
Noise level : 56 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable stainless steel
EAN code : 4242004204220
Connection Rating : 146 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 60; 50 Hz
Plug type : GB plug
Installation typology : Built-in

Optional accessories

Z51ITD1X1	Long Life recirculation kit external
Z51XC1X6	Clean Air Plus recirc. kit external
Z54TC02X0	Standard odor filter (replacement)
Z54TM90X0	Installation kit for 90cm wide wall unit
Z54TS02X0	Standard recirculation kit



4 242004 204220

N 90, telescopic cooker hood, 90 cm, Stainless steel
D49PU54X0B



COOKING PASSION SINCE 1877

Features

Features

- 7 segment LED display
- ClimateControl sensor
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- Silence kit
- Noise reduction function
- 2 x LED lights
- softLight with dimmer function
- Neutral white lights
- 3 metal grease filter cassettes
- Interval operation
- Automatic after running (10 minutes)
- Saturation indicator for metal and charcoal filter

Design

- Telescopic hood
- For installation into a 60cm or 90cm wide cupboard
- Installation system: Telescopic comfort installat.
- Stainless steel
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 394 m³/h
Intensive 708 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 56 dB(A) re 1 pW
Intensive: 68 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 358 m³/h
Intensive: 628 m³/h
Noise level in recirculation mode:
Max. normal use: 60 dB(A) re 1 pW
Intensive: 71 dB(A) re 1 pW
- Additional noise insulation
- Power rating: 146 W
- Light Intensity: 601 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.75 m
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 37.9 kWh/year*
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Dimensions exhaust air (HxWxD): 426-426 x 898 x 290 mm
- Dimensions recirculating (HxWxD): 426-426 x 898 x 290 mm







* In accordance with the EU-Regulation No 65/2014

N 90, telescopic cooker hood, 90 cm, Stainless steel
D49PU54X0B



COOKING PASSION SINCE 1877

Dimensioned drawings

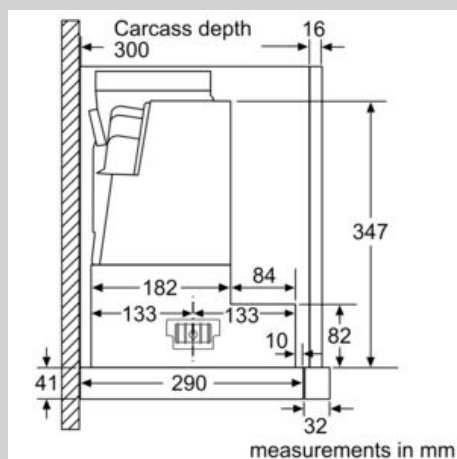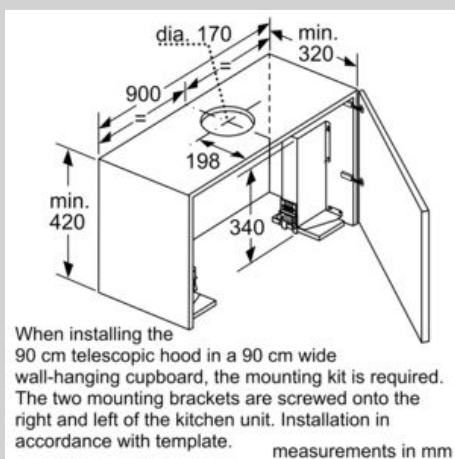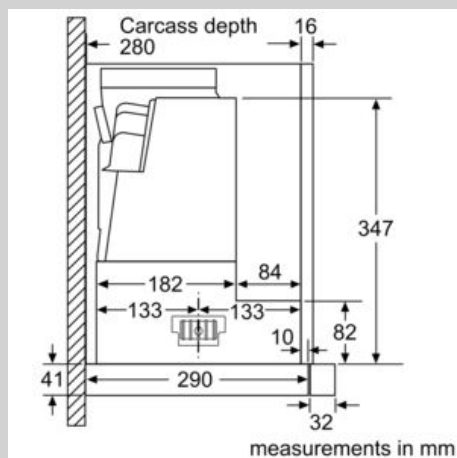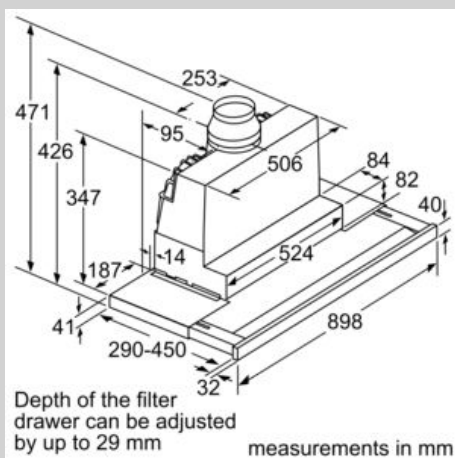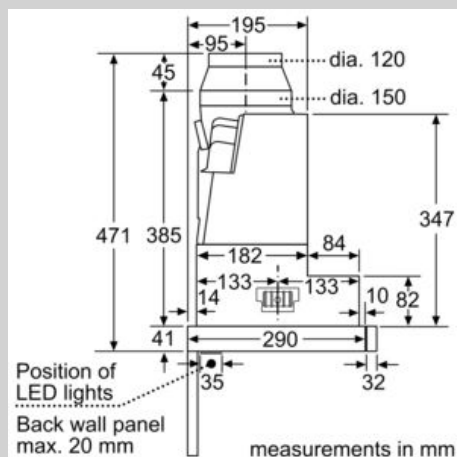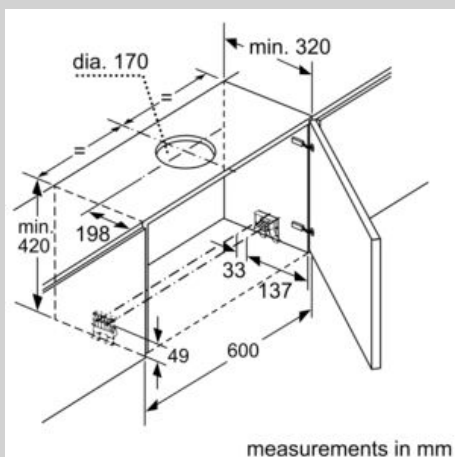

N 90, telescopic cooker hood, 90 cm, Stainless steel
D49PU54X0B

Dimensioned drawings

