

N 90, CANOPY COOKER HOOD, 70 CM, CLEAR
GLASS BLACK PRINTED, STAINLESS STEEL
D57ML67N1B



Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a button
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Optional accessories

Z51TP0X0	Long Life odor filter (replacement)
Z51XB1X6	Clean Air Plus odor filter (replacement)
Z51XC1X6	Clean Air Plus recirc. kit external
Z5135X3	Standard recirculation kit
Z51TD1X1	Long Life recirculation kit external
Z5100X0	Remote control
Z5135X1	Standard odor filter (replacement)

Features

Technical Data

Typology:	Built-in/Built-under
Length electrical supply cord:	150 cm
Required niche size for installation (HxWxD):	418mm x 676.0mm x 264mm mm
Height of the appliance:	418 mm
Minimum distance above an electric hob:	500 mm
Minimum distance above a gas hob:	650 mm
Net weight:	9.1 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Maximum output air extraction:	575 m³/h
Boost position output recirculating:	722 m³/h
Maximum output recirculating air:	533 m³/h
Boost position air extraction:	775 m³/h
Maximum Air flow:	575 m³/h
Number of lights:	2
Noise level:	64 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242004237938
Connection Rating:	172 W
Fuse protection:	3 A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation typology:	Built-in



N 90, CANOPY COOKER HOOD, 70 CM, CLEAR
GLASS BLACK PRINTED, STAINLESS STEEL
D57ML67N1B

Features

Key performance features:

- Energy Efficiency Class: A++ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm:
- max. Normal use 575m³/h
- Intensive 775 m³/h
- Noise max. Normal Level: 64 dB*

Features

- LED display
- Soft touch control
- 3 speeds plus intensive
- Automatic intensive revert (6mins)
- 2 x 1W LED lights
- softLight with dimmer function
- Interval operation
- EfficientDrive BLDC technology
- Automatic after running (30 mins)
- 2 metal grease filter cassettes
- Saturation indicator for grease filter

Design

- Canopy hood
- Installation Installation: Cabinet
- Filter cover glass, metal grease filter
- Electronic controls
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 575 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 64dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 533m³/h
- Intensive: 722m³/h
- Noise level in recirculation mode:
- Max. normal use: 71dB(A) re 1 pW
- Intensive: 77 dB(A) re 1 pW
- Power rating: 172 W
- Light Intensity: 244 lux
- Colour Temperature: 4000 K
- Electrical cable length 1.5 m
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*


- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 30.3 kWh/year*
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 418-418 x 700 x 300 mm

Optional accessories


* In accordance with the EU-Regulation No 65/2014

N 90, CANOPY COOKER HOOD, 70 CM, CLEAR
GLASS BLACK PRINTED, STAINLESS STEEL
D57ML67N1B


Dimensioned drawings

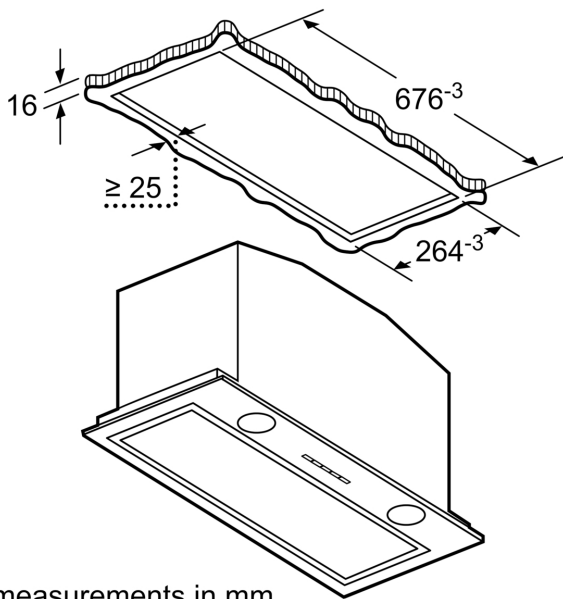

measurements in mm

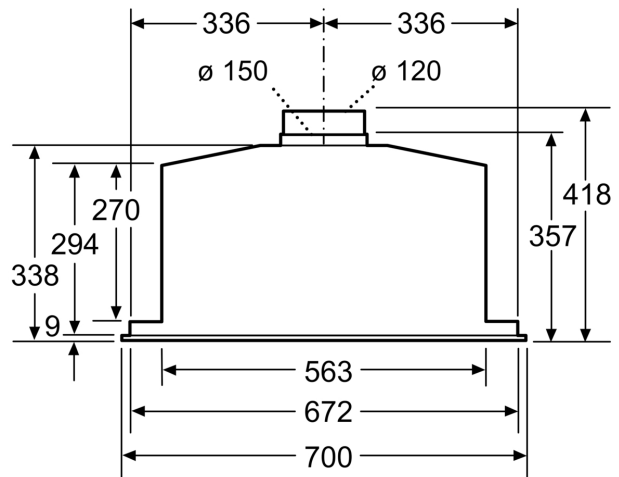


measurements in mm

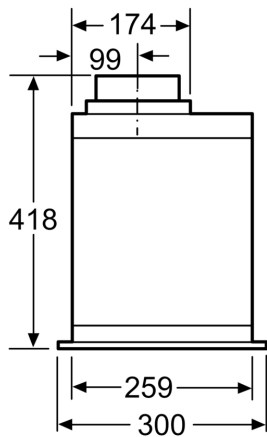

measurements in mm

Measurements in mm

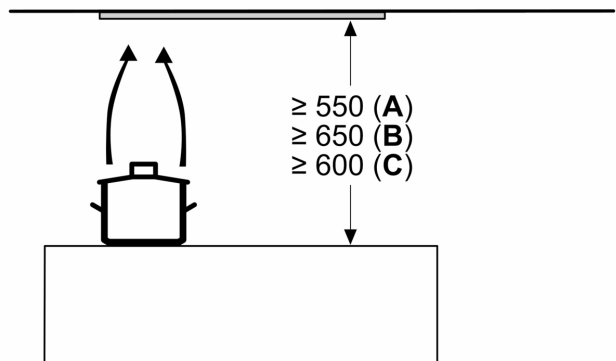

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand