


N 50, wall-mounted cooker hood, 60 cm, Stainless steel  
D76MH52N1B



COOKING PASSION SINCE 1877



A

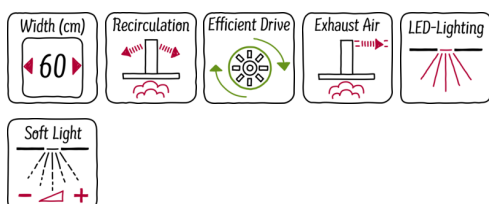

## Features

### Technical Data

Typology : Chimney  
Approval certificates : CE, VDE  
Length electrical supply cord (cm) : 130  
Height of the chimney (mm) : 582-908/582-1018  
Height of product, without chimney (mm) : 46  
Minimum distance above an electric hob : 550  
Minimum distance above a gas hob : 650  
Net weight (kg) : 13.984  
Type of control : Electronic  
Number of speed settings : 3-stage + 2 intensive  
Maximum output air extraction (m<sup>3</sup>/h) : 430  
Boost position output recirculating (m<sup>3</sup>/h) : 350.0  
Boost position air extraction (m<sup>3</sup>/h) : 680  
Number of lights : 2  
Noise level (dB(A) re 1 pW) : 58  
Diameter of air outlet (mm) : 150 / 120  
Grease filter material : Washable aluminium  
EAN code : 4242004183648  
Connection Rating (W) : 136  
Current (A) : 10  
Voltage (V) : 220-240  
Frequency (Hz) : 60; 50  
Plug type : GB plug  
Installation typology : Wall-mounted



4 242004 183648

## Optional accessories

Z50XXP0X0	Long Life odor filter (replacement)
Z5101X1	Standard odor filter (replacement)
Z5101X5	Standard recirculation kit
Z5170X1	CleanAir active carbon filter spare part
Z5270X0	CleanAir Recirculation Kit
Z5865N0	Stainless steel back panel
Z5905N0	Chimney extension 1000 mm
Z5915N0	Chimney extension 1500 mm

*N 50, wall-mounted cooker hood, 60 cm, Stainless steel*  
*D76MH52N1B*

## Features

### Features

- For wall mounted installation
- 7 segment LED display
- 2 x LED lights
- softLight with dimmer function
- 2 metal grease filter cassettes
- Saturation indicator for grease filter
- metal grease filter
- Interval operation
- 3 power levels and 2 intensive settings
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Efficient BLDC-technology

### Design

- Stainless steel
- Stainless steel
- Chimney hood
- Box slimline brand design
- Soft touch control
- Electronic controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Twin channel high performance fan motor
- In recirculation operation chimless use possible
- Easy mounting system
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 430 m³/h  
Intensive 680 m³/h
- 
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 58 dB (A) re 1pW
- Noise max. Normal Level: 58 dB\*
- Light Intensity: 745 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 600 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 600 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
689 x 600 x 500 mm - mounting with outer chimney  
809-1139 x 600 x 500 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 28.5 kWh/year\*

### Optional accessories

- Recirculating kit Z5101X5, Z5270X0

\* In accordance with the EU-Regulation No 65/2014