

N 30, WALL-MOUNTED COOKER HOOD, 60 CM,
CLEAR GLASS
D86ER22N0B



- ✓ 2 x 40 Watt lamps
- ✓ 1 metal grease filter cassette
- ✓ 60 cm wide
- ✓ For wall mounted installation
- ✓ Glass canopy

Z5101X5	Standard recirculation kit
Z5170X1	CleanAir active carbon filter spare part
Z5270X0	CleanAir Recirculation Kit
Z5905N0	Chimney extension 1000 mm
Z5915N0	Chimney extension 1500 mm
Z50XXP0X0	Long Life odor filter (replacement)
Z5101X1	Standard odor filter (replacement)

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	582-902/582-1012 mm
Height of the appliance:	52 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Net weight:	16.9 kg
Type of control:	mechanical
Number of speed settings:	3
Maximum output air extraction:	450 m³/h
Maximum output recirculating air:	290 m³/h
Maximum Air flow:	450 m³/h
Number of lights:	2
Noise level:	62 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242004175070
Connection Rating:	170 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



4 242004 175070

*N 30, WALL-MOUNTED COOKER HOOD, 60 CM,
CLEAR GLASS
D86ER22NOB*

Features

- 2 x 40 Watt lamps
- 1 metal grease filter cassette

Design

- 60 cm wide
- For wall mounted installation
- Glass canopy
- Clear glass
- Switch control operation for extractor speeds and light
- Stainless steel filter covers
- Height adjustable


Performance/technical information

- Suitable for ducted extraction and recirculation
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB (A) re 1pW (48 dB (A) re 20 µPa sound pressure)
- 3 power levels
- Installation system: Chimney hood wall fixing syst.

Optional accessories


- Recirculating kit Z5101X5

N 30, WALL-MOUNTED COOKER HOOD, 60 CM,
CLEAR GLASS
D86ER22N0B

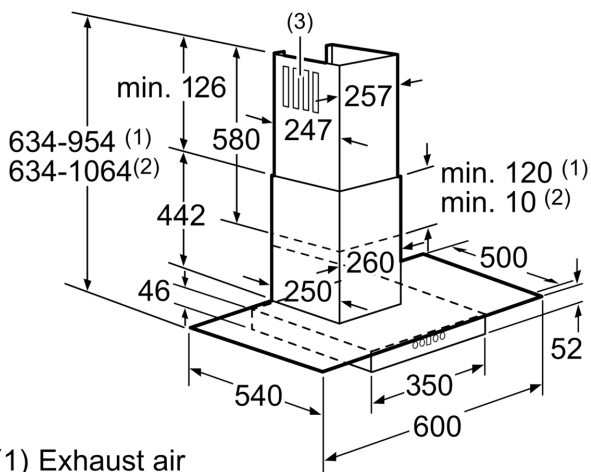


- (1) Exhaust air
(2) Circulated air
(3) Air outlet - slot for exhaust air to be mounted facing down

Measurements in mm

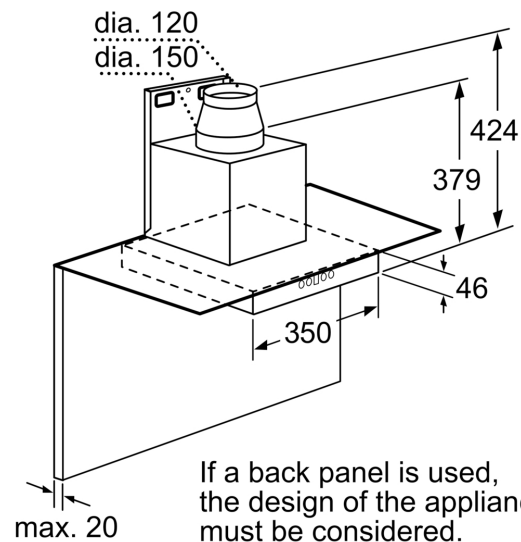


If a back panel is used, the design of the appliance must be considered.

Measurements in mm

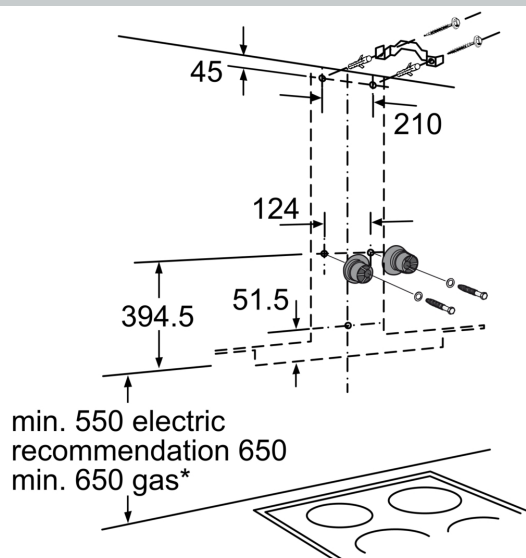

* From upper edge of pan support

Measurements in mm

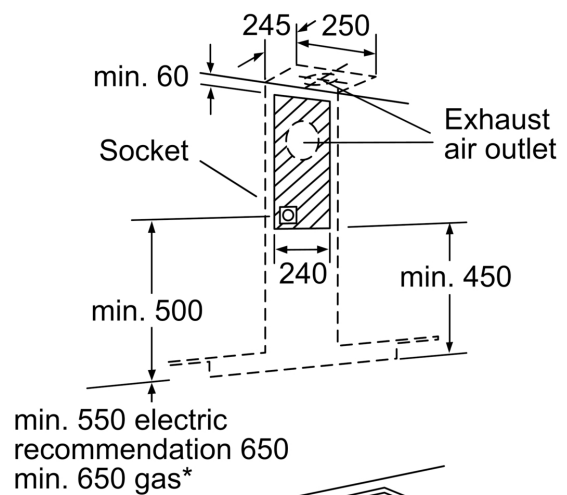

* from upper edge of pan support

Measurements in mm