

N 70, Integrated Design Hood, 90 cm, White with LED backlit
glass panel
D94XAF8N0B



COOKING PASSION SINCE 1877



B

Our invisible integrated canopy box hood - perfectly integrated with extra storage for easy access items, such as spices and herbs.

✓ LED Lighting – Clear illumination while you cook.

Features

Technical Data

Typology : Built-in/Built-under
Length electrical supply cord : 150 cm
Min. required niche size for installation (HxWxD) : 356mm x 862.0mm x 310mm mm
Minimum distance above an electric hob : 500 mm
Minimum distance above a gas hob : 650 mm
Net weight : 14.1 kg
Type of control : mechanical
Number of speed settings : 3
Maximum output air extraction : 610 m³/h
Maximum output recirculating air : 585 m³/h
Number of lights : 2
Noise level : 70 dB(A) re 1 pW
Diameter of air outlet : 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004243632
Connection Rating : 255 W
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : Euro plug w/ earthing 16A/250V
Installation typology : Built-in



4 242004 243632

Optional accessories

Z51IBN0N0 Chimney extension 187-360mm
Z51IBU0X0 Standard recirculation kit
Z51IMA0X0 Standard odor filter (replacement)
Z51ITD1X1 Long Life recirculation kit external
Z51IXC1X6 Clean Air Plus recirc. kit external

*N 70, Integrated Design Hood, 90 cm, White with
LED backlit glass panel
D94XAF8NOB*



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 610 m³/h
- Noise max. Normal Level: 70 dB*

Features

- 3 power levels via rotary switch, retractable
- White with LED backlit glass panel
- 2 x LED 2.5W
- Colour Temperature: 3500 K
- Filter cover glass, metal grease filter
- 2 metal grease filter cassettes
- Cupboard 90 cm

Design

- Adjustable glass visor for additional vapour capture
- Filler strip for an individual depth adjustment in cupboard up to maximum 350 mm.
- Mechanical controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 610 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 70 dB(A) re 1 pW
- Power rating: 255 W
- Light Intensity: 76 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions (HxWxD): 356 x 894 x 310 mm
- Built-in dimensions (HxWxD): 356 x 862 x 310-350 mm
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 61 kWh/year*

Optional accessories


- Recirculating kit Z51IBU0X0

* In accordance with the EU-Regulation No 65/2014


N 70, Integrated Design Hood, 90 cm, White with
LED backlit glass panel
D94XAF8NOB

Dimensioned drawings


measurements in mm
side view

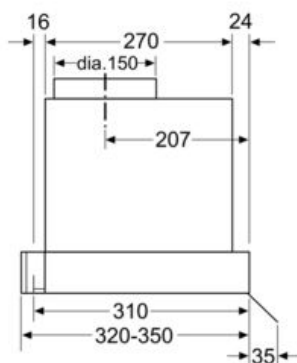

measurements in mm
front view

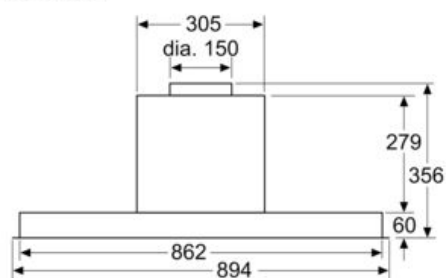


measurements in mm

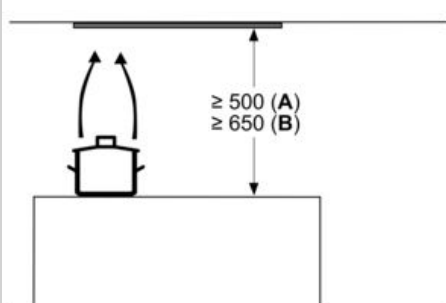

From upper edge of pan support:
A: Electric
B: Gas

measurements in mm

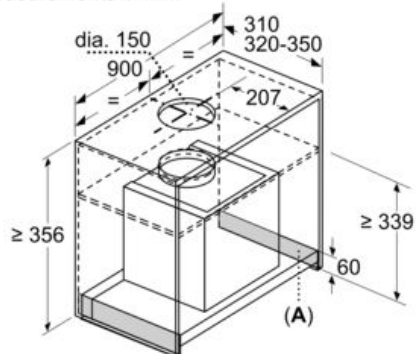

A: Area without hinge