

**N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT
CLOSE FLAT HINGE**
GI7815CE0G



Included accessories

1 x ice cube tray

Optional accessories

KS0B0SZ0 Heavy-duty hinge support

This NoFrost built-in freezer needs no defrosting and features a malfunction warning signal in case of increasing temperature.

- ✓ No Frost – No more defrosting your freezer.
- ✓ Vario Zone – Personalise your drawers with various loading options to find the perfect fit.
- ✓ Home Connect – Add your smart fridge to your home network and stay connected to your kitchen.
- ✓ Soft Close – Enjoy the silence. The door softly closes itself when at an angle of 20 degrees.

Features

Technical Data

Energy Efficiency Class¹:E
 Average annual energy consumption in kilowatt hour per year (kWh/a): 235 kWh/annum
 Sum of volume of frozen compartments: 212 l
 Airborne acoustical noise emissions : 35 dB(A) re 1pW
 Airborne acoustical noise emission class: B
 Thermometer freeze section: Digital
 Light: No
 Product category: Upright freezer
 Built-in / Free-standing: Built-in
 Door panel options: Not possible
 Frost free system: Fridge and freezer
 Height of the appliance: 1772 mm
 Width of the appliance: 558 mm
 Depth: 545 mm
 Required niche size for installation (HxWxD): ... 1775x560x550 mm
 Dimensions of the packed product (HxWxD): ... 1840x610x640 mm
 Net weight: 67.7 kg
 Gross weight: 71.9 kg
 Connection Rating: 120 W
 Fuse protection: 13 A
 Frequency: 50 Hz
 Length electrical supply cord: 230 cm
 Door hinge: Left reversible
 Defrost: Automatic
 Warning signal / malfunction: Both visual and audible
 Door lock: No
 Number of drawers/baskets (Stck): 5
 Number of freezing flaps (Stck): 2
 EAN code: 4242004250227
 Brand: Neff
 Product name / Commercial code: GI7815CE0G
 Product category: Upright freezer
 Included accessories: 1 x ice cube tray



¹ Scale of Energy Efficiency Classes from A to G

N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT
CLOSE FLAT HINGE
G17815CE0G

Features

Functions

- Fixed hinge
- Fixed hinge

Design features

- Full frost free, never have to defrost ever again
- Home Connect: Remote Monitoring and Control
- Electronic control (7 segment display)
- 1 compressor/1 cooling circuit
- SuperFreeze functions with automatic deactivation
- SoftClose door - dampens door movement, for smooth and effortless closure
- Ventilation in plinth, the plinth size can be varied
- Automatic defrost freezer
- Acoustic warning system
- Freezer malfunction warning signal: optical, acoustical

Food freshness system

- 5 freezer drawers
- 2 hinged freezer compartment
- Safety glass shelves between freezer drawers

Key features - Fridge section

- Left hinged door, reversible
- Connection value 120 W
- 220 - 240 V

Dimension and installation

- Dimensions: 177.2 cm H x 55.8 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Freezer section

- 1 ice cube tray

Design features

Dimension and installation





Additional features

Performance and Consumption


- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- EU19_EEK_D: E
- Total Volume : 212 l
- Net Fridge Volume : 0 l
- Net Freezer Volume : 212 l
- Net 4* compartment volume : 212 l
- Freezing capacity 24h : 14 kg
- Annual Energy Consumption: 235 kWh/a
- Climate Class: SN-T
- Noise Level : 35 dB
- Temperature rise time : EU19_Temperature rise time_D: 9 H

N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT
CLOSE FLAT HINGE
G17815CE0G

Dimensioned drawings

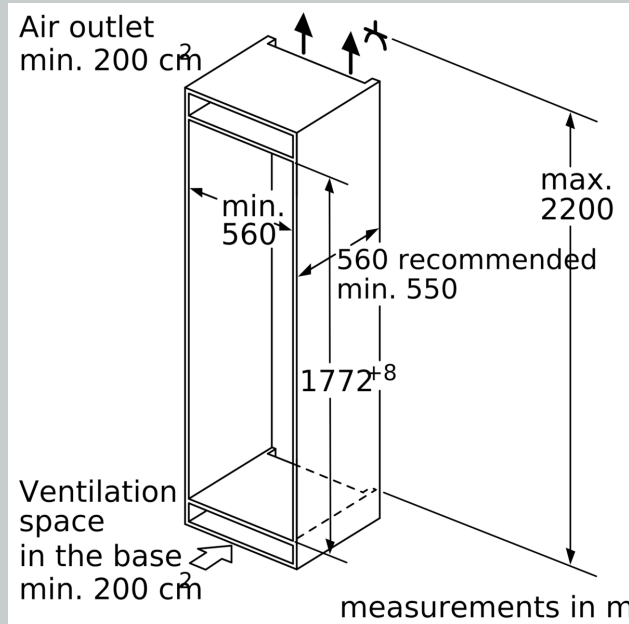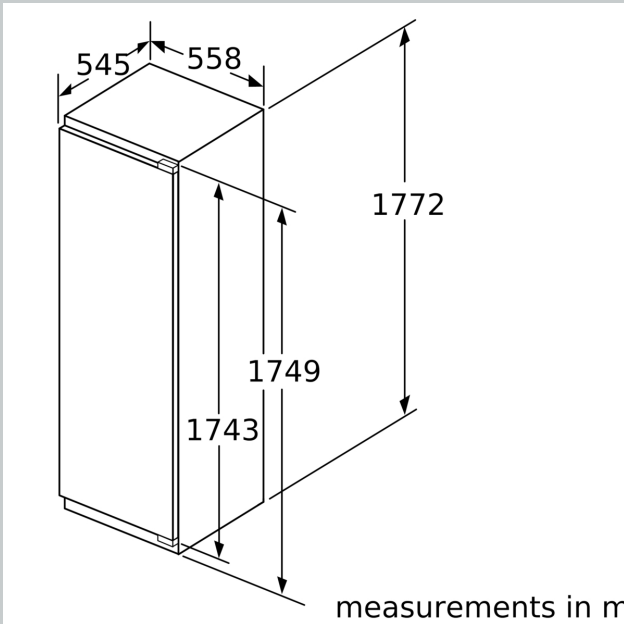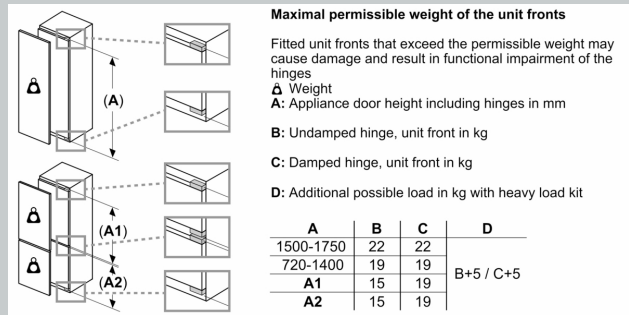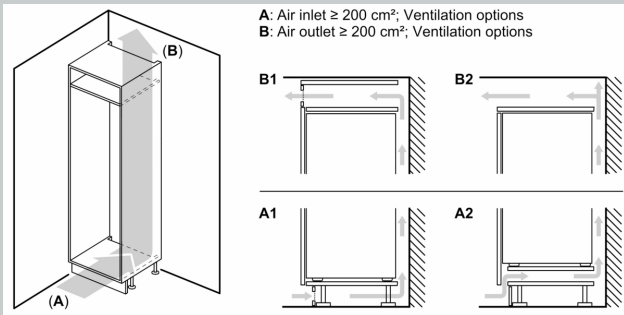


Dimensioned drawings

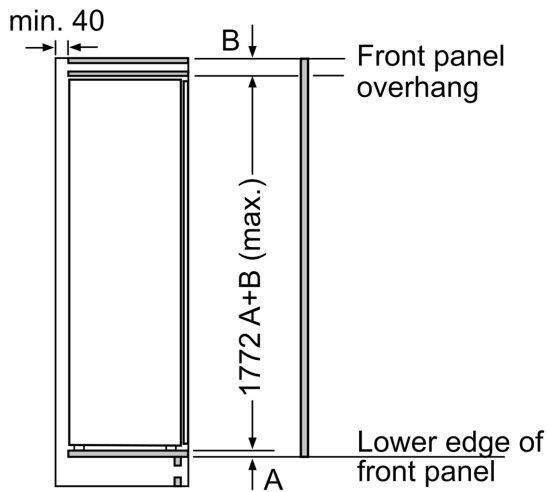

measurements in mm

Maximal permissible weight of the unit fronts




Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door Hinges in mm:	undamped hinge, Door in kg:	damped hinge, Door in kg:
1500-1750	22	22

measurements in mm

Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.