

N 70, ceiling cooker hood, 100 cm, Stainless steel
I90CL46N0



COOKING PASSION SINCE 1877



Plug & Play ceiling hood: easy ceiling installation in recirculation mode.

- ✓ Dimmer Function – dim the LED light conveniently with the button on the remote control
- ✓ Remote Control – comfortably control the ceiling hood with a remote
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Features

Technical Data

Typology : Traditional
Approval certificates : CE
Length electrical supply cord (cm) : 0
Minimum distance above an electric hob : 600
Minimum distance above a gas hob : 900
Net weight (kg) : 27.636
Type of control : Electronic
Boost position output recirculating (m³/h) : 850.0
Maximum output recirculating air (m³/h) : 780
Number of lights : 2
Diameter of air outlet (mm) : 150
Grease filter material : Washable aluminium
EAN code : 4242004201717
Connection Rating (W) : 192
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : no plug
Installation typology : Built-in



4 242004 201717

Optional accessories

Z54CP00X0 Long Life odor filter (replacement)

N 70, ceiling cooker hood, 100 cm, Stainless steel
190CL46N0



COOKING PASSION SINCE 1877

Features

Features

- LED display
- 2 x 6W LED
- softLight with dimmer function
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Stainless steel filter cover, metal grease filter
- 3 speeds plus intensive
- Interval operation
- Automatic after running (30 mins)
- Automatic intensive revert (6mins)
- Rim ventilation

Design


- Stainless steel
- Ceiling mounted hood
- Soft touch control
- Electronic controls
- Infrared remote control
- Neutral white lights

Performance/technical information


- Suitable for recirculated extraction
- Max. extraction rate: 850 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 780 m³/h
Intensive: 850 m³/h
- Noise levels in recirculation mode:
Max. normal use: 70 dB(A) re 1 pW
Intensive: 72 dB(A) re 1 pW
- Power rating: 192 W
- Light Intensity: 345 lux
- Colour Temperature: 4000 K
- Electrical cable length 0 m
- Dimensions recirculating (HxWxD): 245-245 x 1000 x 700 mm

N 70, ceiling cooker hood, 100 cm, Stainless steel
190CL46N0

Dimensioned drawings

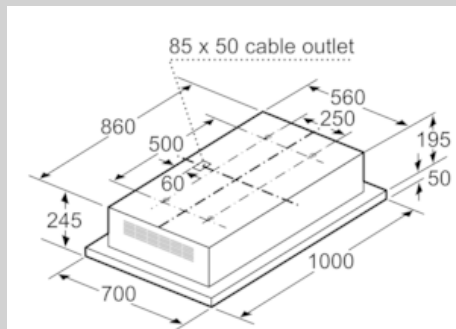

measurements in mm

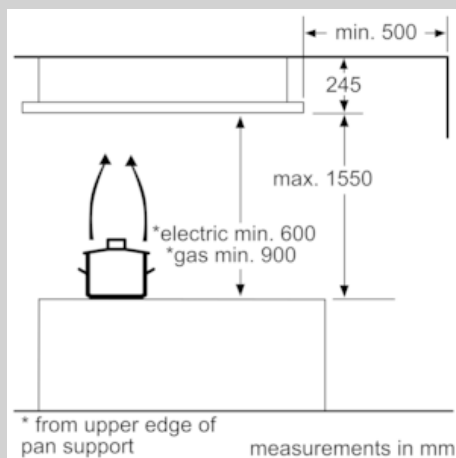

* from upper edge of
pan support

measurements in mm