

N 50, CEILING COOKER HOOD, 90 CM, STAINLESS
STEEL
I94CAQ6N0B



Reduced height motor housing of 18.9cm to aid in challenging flush ceiling installations

- ✓ Cooktop-based Hood Control – Adjust your hood's extraction level and lighting.
- ✓ Dimmer Function – dim the LED light conveniently with the button on the remote control
- ✓ Remote Control – comfortably control the ceiling hood with a remote
- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense

Z52JCB1X1	Clean Air Standard odor filter (repl.)
Z52JXC1N1	Clean Air Standard recirc. kit ext. inox
Z52JXC1W1	Clean Air Stand. recirc. kit ext. white

Typology: Island/Ceiling
 Length electrical supply cord: 130.0 cm
 Required niche size for installation (HxWxD): 189mm x 888.0mm x 487mm mm
 Height of the appliance: 189 mm
 Minimum distance above an electric hob: 650 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 22.0 kg
 Type of control: Electronic
 Number of speed settings: 3-stage + 2 intensive
 Maximum output air extraction: 434 m³/h
 Boost position output recirculating: 574.0 m³/h
 Maximum output recirculating air: 336 m³/h
 Boost position air extraction: 734 m³/h
 Maximum Air flow: 434 m³/h
 Number of lights: 4
 Noise level: 61 dB(A) re 1pW
 Diameter of air outlet: 150 mm
 Grease filter material: Washable stainless steel
 EAN code: 4242004245155
 Connection Rating: 204 W
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology: Island



N 50, CEILING COOKER HOOD, 90 CM, STAINLESS STEEL I94CAQ6N0B

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm:
- max. Normal use: 434 m³/h
- Intensive: 734 m³/h
- Noise max. Normal Level: 61 dB*

Special features

- Hob-Hood control (with Wi-Fi enabled hob)
- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Adjustable color temperature (2.700 K - 5.000 K) for adaption to the room lighting available via Home Connect
- Interval function: available via Home Connect
- Silence function: available via Home Connect
- Fully automatic hood

Features

- 3 power levels and 2 intensive settings
- Infrared remote control
- LED display
- Twin channel high performance fan motor
- Efficient BLDC technology
- Stylish LED lighting behind glass
- 4 x 3W LED lights
- softLight with dimmer function
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- Rim ventilation

Design

- For ceiling mounted installation
- Stainless steel filter cover, metal grease filter
- Electronic controls

Performance/technical information


- Suitable for ducted extraction and recirculation
- For recirculated extraction CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 434 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at

maximum normal setting: extraction rate: 61 dB (A) re 1pW

- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 61 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 61 dB(A) re 1 pW
- Intensive: 72 dB(A) re 1 pW
- With the Clean Air Standard recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 336 m³/h
- Intensive: 574 m³/h
- Noise level in recirculation mode with Clean Air Standard odor filter : Max. normal use: 61 dB(A) re 1 pW
- Intensive: 74 dB(A) re 1 pW
- Power rating: 204 W
- Light Intensity: 659 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 189-189 x 900 x 500 mm
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: E*
- Average Energy Consumption: 35.1 kWh/year*

* In accordance with the EU-Regulation No 65/2014


N 50, CEILING COOKER HOOD, 90 CM, STAINLESS
STEEL
I94CAQ6N0B

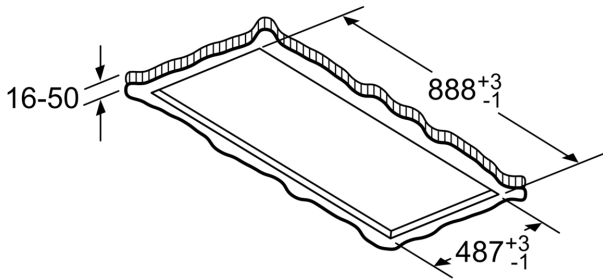

Never fit directly onto plasterboard or similar lightweight construction materials of the suspended ceiling. A suitable substructure is required that is securely fixed to the concrete ceiling.


measurements in mm

Measurements in mm

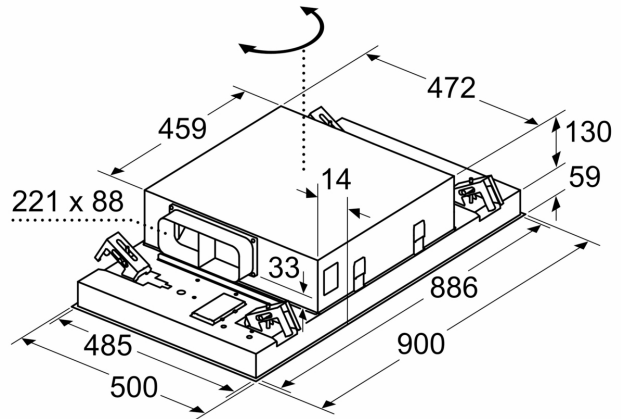


The fan outlet can be turned in all four directions

measurements in mm
Air extraction

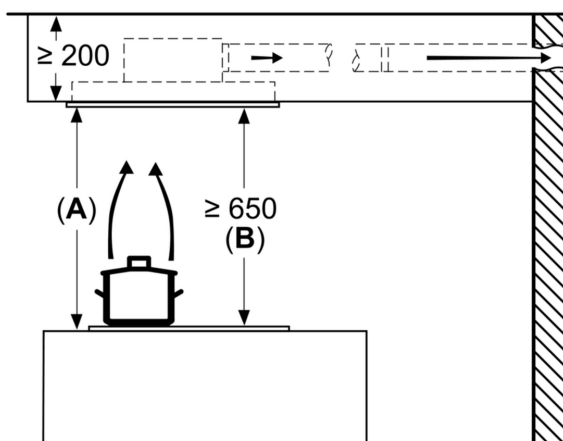


A: Optimum performance 700-1500
B: From upper edge of pan support

measurements in mm
Air recirculation

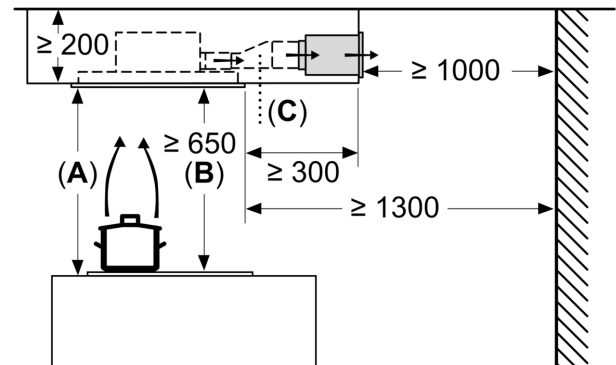

A: Optimum performance 700-1500
B: From upper edge of pan support
C: Connector (from a flat duct to a circular duct).
Not included in the scope of delivery.

measurements in mm
Air recirculation

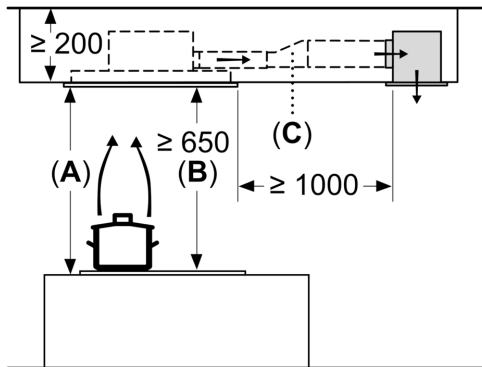

- A:** Optimum performance 700-1500
B: From upper edge of pan support
C: Connector (from a flat duct to a circular duct).
 Not included in the scope of delivery.