

N 90, BUILT-IN FRIDGE-FREEZER WITH FREEZER AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE KI8865DE0













The built-in fridge-freezer with FreshSafe 3 and NoFrost keeps food fresher for longer and builds no ice in the freezer.

- $\sqrt{\mbox{ Fresh Safe 3}}$ Climate-controlled drawers for optimal fresh food storage.
- $\sqrt{No Frost No more defrosting your freezer.}$
- $\sqrt{\,}$ Adjustable Glass Shelves Height adjustable shelves create the space you need for inspiring dishes in your fridge
- $\sqrt{\,}$ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge
- $\sqrt{\,}$ Vario Zone Personalise your drawers with various loading options to find the perfect fit.

Features

E A G

Technical Data	
Energy Efficiency Class ¹ :	
Average annual energy consumption in kilov	' '
(kWh/a):	
Sum of volume of frozen compartments:	
Sum of volume of chill compartments:	
Airborne acoustical noise emissions :	` '
Airborne acoustical noise emission class:	
Built-in / Free-standing:	
Door panel options:	· ·
Height:	
Width of the appliance:	558 mm
Depth:	
Required niche size for installation (HxWxD)):1775x560x550 mm
Net weight:	
EAN code:	4242004247937
Connection Rating:	90 W
Fuse protection:	10 A
Door hinge:	Right reversible
Voltage:	220-240 \
Frequency:	50 Hz
Length electrical supply cord:	230.0 cm
Number of compressors:	1
Number of independent cooling systems:	
Interior ventilator:	No
Reversible Door Hinge:	Yes
Number of Adjustable Shelves in fridge com	partment: 2
Shelves for Bottles:	No
Frost free system:	Fridge and freeze
	Full-integrated

¹ Scale of Energy Efficiency Classes from A to G



N 90, BUILT-IN FRIDGE-FREEZER WITH FREEZER AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE KI8865DE0

Features

Functions

• LED with Soft Start

Design features

- noFrost freezer, never have to defrost ever again
- Home Connect: Remote Monitoring and Control
- Electronic controls for fridge and freezer
- vitaControl constant temperature by intelligent sensor technology Constant temperature control by intelligent sensor technology
- Automatic defrost fridge
- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity
- SuperCool function with automatic deactivation
- SuperFreeze functions with automatic deactiviation
- Holiday mode saves energy when you're away a longer period of time
- Acoustic door open warning indicator
- Freezer malfunction warning signal: optical and acoustical

Design features

- 1 safety glass shelves, of which 2 are height adjustable
- BottleFlex Shelf
- 3 door trays, including 0x dairy compartment

Freshness System

- Capacity in 0° C section: 55 l
- 1 FreshSafe 3 0°C drawer with humidity control for optimal freshness; food stays fresh for longer due to two climate zones.
- 1 FreshSafe 3 0°C drawer for optimal freshness; food stays fresh for up to three times longer due to two climate zones.

Food freshness system

- Removeable safety glass shelves in freezer
- 3 transparent freezer drawers, 1 bigbox

Dimension and installation

- \bullet Dimensions: 177.2 cm H x 55.8 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Fridge section

- Right hinged door, reversible
- Connection value 90 W
- 220 240 V

Key features - Feezer section

• KI8865DE0

Included accessories

Country Specific Options

• Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Design features

Dimension and installation


Additional features

Performance and Consumption

- EU19_EEK_D: E
- Total Volume: 223 I
- Net Fridge Volume : 156 l
- Net Freezer Volume : 67 l
- Freezing capacity 24h : 7 kg
- Annual Energy Consumption: 252 kWh/a
- Climate Class: SN-ST
- Noise Level: 36 dB
- Temperature rise time: EU19_Temperature rise time_D: 8 H




N 90, BUILT-IN FRIDGE-FREEZER WITH FREEZER AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE KI8865DE0

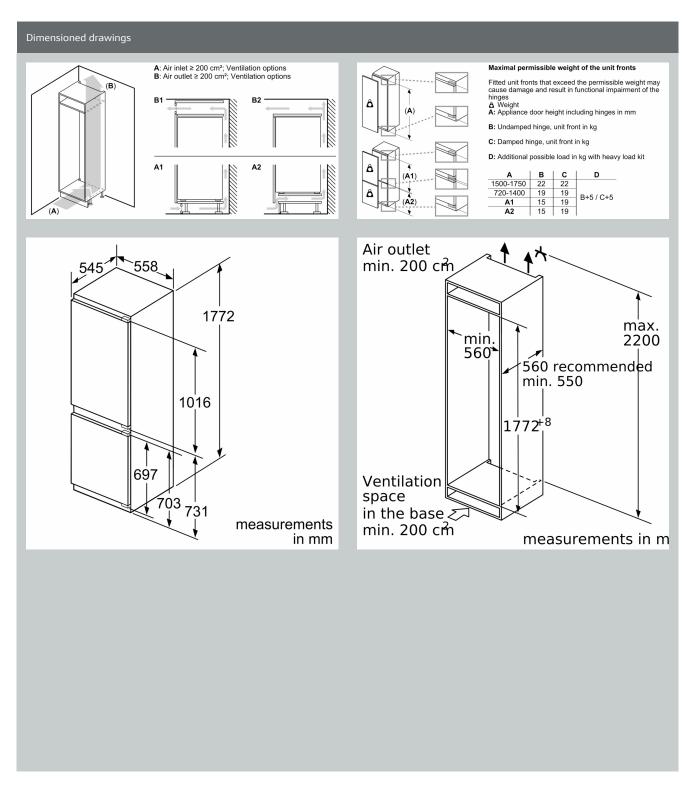




Dimensioned drawings



The specified unit door dimensions are valid for a door gap of 4 mm.

measurements in mm

measurements in mm Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.