

N 70, FRENCH DOOR BOTTOM FREEZER, MULTI DOOR, 183 X 90.5 CM, BRUSHED BLACK STEEL ANTI-FINGERPRINT, TOTAL NO FROST KM3963XE0



- ✓ Fresh Safe 1 <0°C> – Ideal storage for fruit and veg, fish and meat.
- ✓ No Frost – No more defrosting your freezer.
- ✓ Freezer Light – Bright illumination of all of your frozen items.
- ✓ Adjustable Glass Shelves – Height adjustable shelves create the space you need for inspiring dishes in your fridge
- ✓ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge

Features

Technical Data

Energy Efficiency Class¹:E
 Average annual energy consumption in kilowatt hour per year (kWh/a): 327 kWh/annum
 Sum of volume of frozen compartments: 199 l
 Sum of volume of chill compartments: 375 l
 Airborne acoustical noise emissions : 39 dB(A) re 1pW
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Free-standing
 Door panel options: Not possible
 Height: 1830 mm
 Width of the appliance: 905 mm
 Depth: 731 mm
 Net weight: 139.0 kg
 EAN code: 4242004292043
 Fuse protection: 10 A
 Door hinge: left and right
 Voltage: 220-240 V
 Frequency: 50-60 Hz
 Length electrical supply cord: 240 cm
 Number of compressors: 1
 Number of independent cooling systems: 1
 Interior ventilator: Yes
 Reversible Door Hinge: No
 Number of Adjustable Shelves in fridge compartment: 4
 Shelves for Bottles: Yes
 Frost free system: Fridge
 Installation typology: Freestanding



¹ Scale of Energy Efficiency Classes from A to G

N 70, FRENCH DOOR BOTTOM FREEZER, MULTI
DOOR, 183 X 90.5 CM, BRUSHED BLACK STEEL
ANTI-FINGERPRINT, TOTAL NO FROST
KM3963XE0

Features

- KM3963XE0
- Full frost free, CrossDoor
- Standard door black inox-antifingerprint

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 574 l
- Annual Energy Consumption: 327 kWh/a
- EU19_Fast freezer facility_D: yes
- Noise Level : 39 dB

Functions

- black inox-antifingerprint doors and cast iron side panels
- Bright interior LED fridge light
- Metal backwall
- Interior design with metal applications

Design features

- Full frost free, never have to defrost ever again
- Electronic controls for fridge and freezer
- Home Connect: Remote diagnostics, Remote Monitoring and Control
- Separate temperature control for cooling and freezing section
- SuperCool function with automatic deactivation
- acoustic for Fridge and Freeze, optical
- Automatic defrost fridge
- Freezer malfunction warning signal: optical, acoustical

Ice and Water

- Illuminated water and ice dispenser
- In-door ice and water dispenser: chilled water, crushed ice, ice cubes
- Connection Length (water supply):200 cm

Design features

- Net Fridge Volume : 375 l
- MultiAirFlow cooling - improves circulation of air around the fridge
- Water dispenser: yes, direct conn.water-tap
- 5 safety glass shelves of which 4 are height adjustable
- Door shelves in fridge door: 1 large and 3 small
- flexShelf - easy to pull down if required, space saving if not in use
- 1 dairy compartment in door

Freshness System

- 1 FreshSafe drawer on rails with humidity control retains freshness for longer.

Food freshness system

- Net Freezer Volume : 199 l
- Temperature rise time : EU19_Temperature rise time_D: 11 H
- Net 4* compartment volume : 192 l
- Freezing capacity 24h : 16 kg

- 6 freezer drawers
- Full frost free

Dimension and installation

- Dimensions: 183 cm H x 90.5 cm W x 73.1 cm D

Key features - Fridge section

- 220 - 240 V
- Climate Class: SN-T
- Length of power cord:240 cm


Key features - Freezer section

Country Specific Options

N 70, FRENCH DOOR BOTTOM FREEZER, MULTI DOOR, 183 X 90.5 CM, BRUSHED BLACK STEEL ANTI-FINGERPRINT, TOTAL NO FROST KM3963XE0


Dimensioned drawings

Measurements in mm

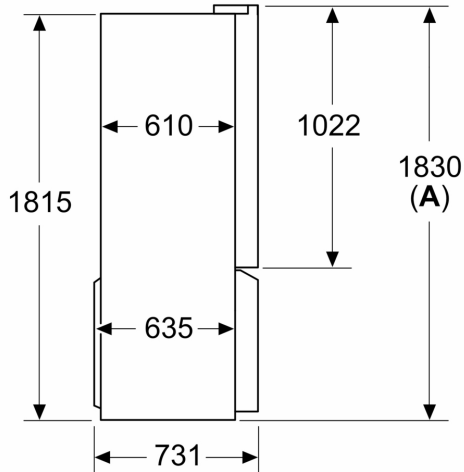


A: Front is adjustable 1830–1847 mm, with front levelling feet fully extended

Measurements in mm

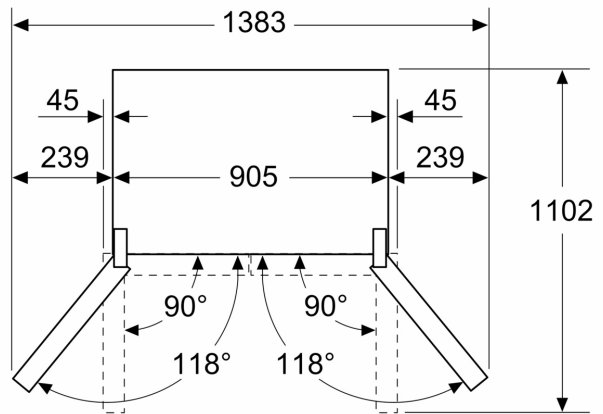


Measurements in mm

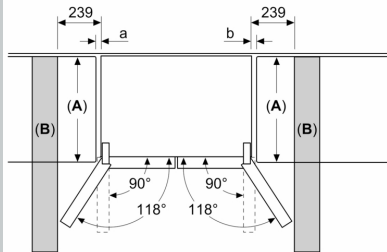

A	a	b
≤ 600	0	0
600 < A ≤ 650	45	45
650 < A ≤ 700	60	60
> 700	239	239

A: Kitchen cabinet or worktop depth
B: Wall
 Drawers can be pulled and taken out with door open to 90°

Measurements in mm

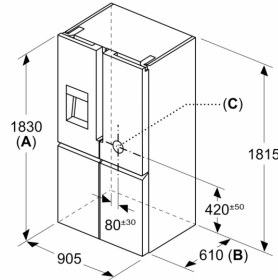

A: Front is adjustable 1830–1847 mm, with front levelling feet fully extended
B: Add 25 mm for fixed spacers on back
C: Water connection position