


*N 30, GAS HOB, 60 CM, TEMPERED GLASS, BLACK
T26CR51S0*

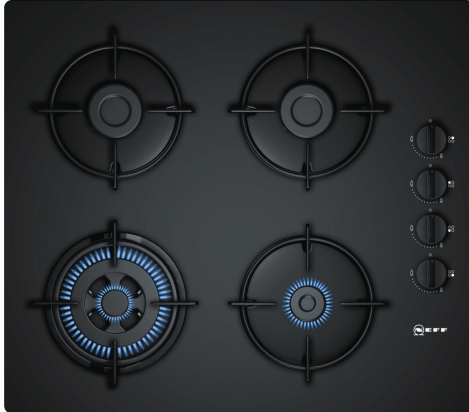

Optional accessories

Z2402X0	Small pot support
Z2472X0	Wok ring
Z2480X0	Simmer plate

Gas hob with side-mounted controls.

- ✓ Tempered Glass Surface - extremely easy-to-clean surface.
- ✓ Pan supports - single steel pan supports for easy handling.
- ✓ Wok Burner - powerful cooking at up to 3.3 kW.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.

Features

Technical Data

Product name/family:gas hob w
integrated controls
Built-in / Free-standing: Built-in
Energy input: Gas
Number of cooking zones: 4
Type of control setting devices: sword knobs
Required niche size for installation (HxWxD): 45 x 560-562 x
480-492 mm
Width of the appliance: 590 mm
Dimensions: 56x590x520 mm
Dimensions of the packed product (HxWxD): . 141 x 651 x 578 mm
Net weight: 9.1 kg
Gross weight: 10.0 kg
Residual heat indicator:without
Location of control panel:Lateral
Basic surface material:Tempered glass
Color of surface: Black
Color of frame: Black
Length electrical supply cord: 100.0 cm
EAN code:4242004201441
Gas connection rating:7700 W
Fuse protection:3 A
Voltage:220-240 V
Frequency:60; 50 Hz



N 30, GAS HOB, 60 CM, TEMPERED GLASS, BLACK T26CR51SO

Features

Design

- tempered glass surface, black
- Two built-in options:
 - - Flush installation - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Steel single

Usage convenience

- Design co-ordinated control dials: access dials on the side with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: Wok burner up to 3.3 KW (depending on gas type)
- Left rear: Standard burner up to 1.7 KW (depending on gas type)
- Right rear: Standard burner up to 1.7 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 56 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.7 KW