


N 70, gas hob, 60 cm, Stainless steel
T26DA49N0



COOKING PASSION SINCE 1877

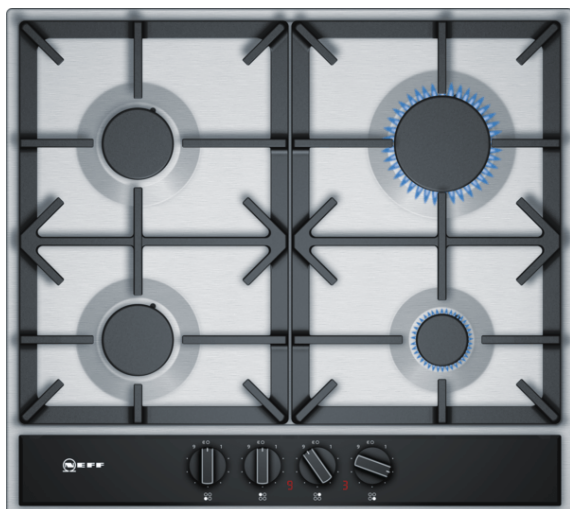

The gas hob with a stainless-steel surface design, slightly raised glass surface and adjustable FlameSelect

- ✓ FlameSelect® - thanks to the clever control of gas flow, the flame can be precisely adjusted in 9 steps.
- ✓ 7-Segment Display with Residual Heat Indicator - a digital display showing the remaining heat.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- ✓ Stainless steel surface - elegant and sophisticated design.

Features

Technical Data

Product name/family : gas hob w integrated controls
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 4
Type of control setting devices : sword knobs
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492
Width of the appliance : 582
Dimensions : 45 x 582 x 520
Dimensions of the packed product (HxWxD) (mm) : 141 x 651 x 578
Net weight (kg) : 11.146
Gross weight (kg) : 12.0
Residual heat indicator : Separate
Location of control panel : Hob front
Basic surface material : Stainless steel
Color of surface : Stainless steel
Color of frame : Stainless steel
Approval certificates : CE, Eurasian
Length electrical supply cord (cm) : 100
EAN code : 4242004179054
Electrical connection rating (W) : 2
Gas connection rating (W) : 7500
Current (A) : 3
Voltage (V) : 220-240
Frequency (Hz) : 50; 60



4 242004 179054

N 70, gas hob, 60 cm, Stainless steel
T26DA49N0



COOKING PASSION SINCE 1877

Features

Design

- Stainless steel

Special features

- FlameSelect with 9 steps
- LED display for each zone
- Design co-ordinated control dials
- Ignition via control dials
- black cast iron pan supports with protective rubber feet

Power and size

- 4 burner hob
- Left rear: Standard burner 1.75 KW
- Right rear: High speed burner 3 KW
- Left front: Standard burner 1.75 KW
- Right front: Economy burner 1 KW

Safety Features

- Flame failure safety device
- 2-stage residual heat indicators
- Factory set for connection to mains gas. Also usable for Nat gas L/
LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar
Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL)
Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL)
Liquid gas 50 mbar
. For the use of these gas types nozzles need to be changed.
Please check if the required nozzles are included (see
Accessories).

Technical information

- Power cord length 100 cm

Accessories

- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service.

N 70, gas hob, 60 cm, Stainless steel
T26DA49N0

Dimensioned drawings

