


N 70, GAS HOB, 75 CM, STAINLESS STEEL
T27DA69N0

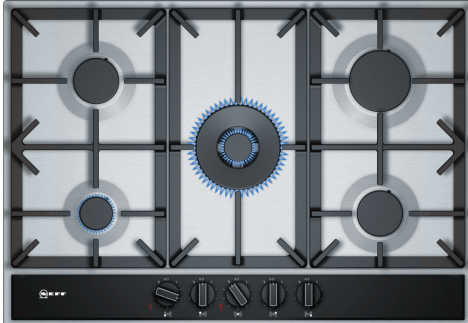

Optional accessories

Z2480X0	Simmer plate
Z32SE10X0	Small pot support
Z32SW11X0	Wok ring

The gas hob with a stainless-steel surface design, slightly raised glass surface and adjustable FlameSelect

- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ 7-Segment Display with Residual Heat Indicator - a digital display showing the remaining heat.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Dual Wok Burner 5.0 kW – Use one gas flame for simmering, two for sizzling stir-fries.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.

Features

Technical Data

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Number of cooking zones: 5
 Type of control setting devices: sword knobs
 Min. required niche size for installation (HxWxD): .. 45 x 560-562 x 480-492 mm
 Width of the appliance: 750 mm
 Dimensions: 53 x 750 x 520 mm
 Dimensions of the packed product (HxWxD): . 145 x 793 x 597 mm
 Net weight: 15.2 kg
 Gross weight: 16.7 kg
 Residual heat indicator: Separate
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100.0 cm
 EAN code: 4242004183181
 Gas connection rating: 12500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



N 70, GAS HOB, 75 CM, STAINLESS STEEL T27DA69N0

Features

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- LED display for each zone: see the selected power level and the residual heat.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 5 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 1 stage: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 12.5 KW

N 70, GAS HOB, 75 CM, STAINLESS STEEL
T27DA69N0

Dimensioned drawings

