


*N 70, GAS HOB, 90 CM, STAINLESS STEEL
T29DA69N0*

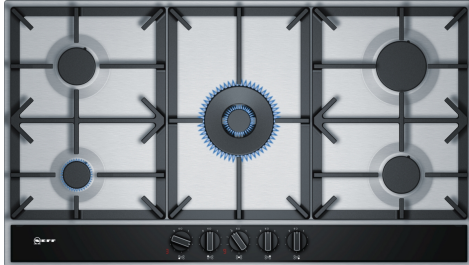

Optional accessories

Z2480X0	Simmer plate
Z32SE10X0	Small pot support
Z32SW11X0	Wok ring

The gas hob with a stainless-steel surface design, slightly raised glass surface and adjustable FlameSelect

Features

Technical Data

Product name/family:gas hob w
integrated controls
Built-in / Free-standing: Built-in
Energy input: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Required niche size for installation (HxWxD):45 x 850-852 x
490-502 mm
Width of the appliance:915 mm
Dimensions: 53x915x520 mm
Dimensions of the packed product (HxWxD): 165 x 1116 x 659
mm
Net weight: 17.3 kg
Gross weight: 19.5 kg
Residual heat indicator:Separate
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface:Stainless steel
Length electrical supply cord: 150.0 cm
EAN code:4242004203575
Gas connection rating:12500 W
Fuse protection:3 A
Voltage:220-240 V
Frequency:60; 50 Hz



N 70, GAS HOB, 90 CM, STAINLESS STEEL T29DA69N0

Features

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- LED display for each zone: see the selected power level and the residual heat.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 5 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 1 stage: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 12.5 KW

N 70, GAS HOB, 90 CM, STAINLESS STEEL
T29DA69N0

Dimensioned drawings

