



*N 70, INDUCTION HOB, 60 CM, BLACK  
T56TT60N0*

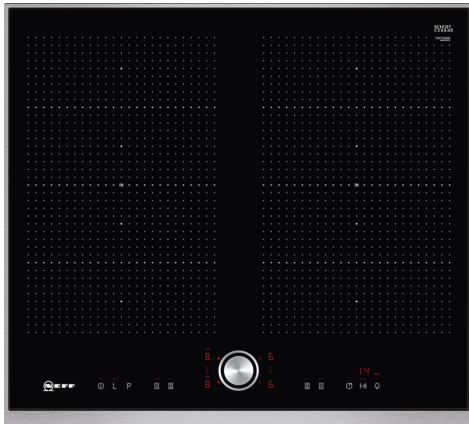


FlexInduction Hob with TwistPad control.

- ✓ TwistPad® – our removable, magnetic control dial that gives you precise, convenient control over all cooking zones.
- ✓ Flex Induction – Your hob detects and heats your individual cookware.
- ✓ Power Move – Just slide your cookware to adjust the temperature.
- ✓ Power Boost – An extra surge of heat when you need fast results.
- ✓ Induction – the heat is generated directly in the cookware for precise cooking that stops when power is off.

Product name/family: ..... Cooking zone ceramic  
 Built-in / Free-standing: ..... Built-in  
 Energy input: ..... Electric  
 Number of cooking zones: ..... 4  
 Required niche size for installation (HxWxD): ..... 51 x 560-560 x 490-500 mm  
 Width of the appliance: ..... 606 mm  
 Dimensions: ..... 51x606x546 mm  
 Dimensions of the packed product (HxWxD): . 126 x 753 x 603 mm  
 Net weight: ..... 13.3 kg  
 Gross weight: ..... 15.5 kg  
 Residual heat indicator: ..... Separate  
 Location of control panel: ..... Front  
 Basic surface material: ..... Ceramic  
 Color of surface: ..... Black, Stainless steel  
 Color of frame: ..... Stainless steel  
 Length electrical supply cord: ..... 110.0 cm  
 EAN code: ..... 4242004193456  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz




N 70, INDUCTION HOB, 60 CM, BLACK  
T56TT60N0

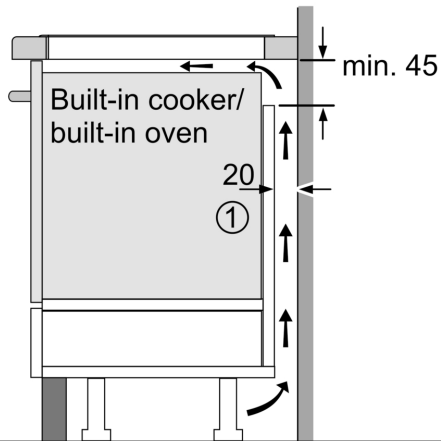

①  
Ventilation gap must  
be present

All measurements in mm

measurements in mm




A: Minimum distance from the hob cut-out to the wall.

B: Recessed depth

C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

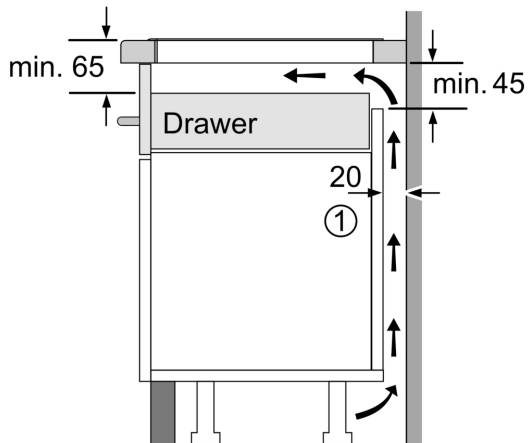

①  
Ventilation gap must  
be present.

Measurements in mm