



FLEX INDUCTION HOB, 60 CM, BLACK, SURFACE  
MOUNT WITHOUT FRAME  
T56UB50X0

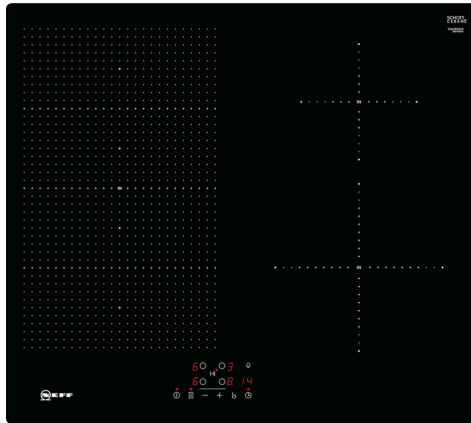

Optional accessories

Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z943SE0	Set of 2 pots and 1 pan
Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste

FlexInduction hob with TouchControl.

- ✓ Touch Control – a convenient way to control hobs with just one touch and a timer if needed.
- ✓ Flex Induction – place your pots and pans within the flex zone anywhere you want and heat them exactly where they stand.
- ✓ Power Boost – optimized power level function for more flexible and even faster heating.
- ✓ Induction – the heat is generated directly in the cookware for precise cooking that stops when power is off.

Features

Technical Data

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Number of cooking zones: ..... 4  
Required niche size for installation (HxWxD): ..... 51 x 560-560 x 490-500 mm  
Width of the appliance: ..... 592 mm  
Dimensions: ..... 51x592x522 mm  
Dimensions of the packed product (HxWxD): . 126 x 753 x 608 mm  
Net weight: ..... 14.4 kg  
Gross weight: ..... 14.9 kg  
Residual heat indicator: ..... Separate  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black  
Length electrical supply cord: ..... 110.0 cm  
EAN code: ..... 4242004234531  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz



FLEX INDUCTION HOB, 60 CM, BLACK, SURFACE  
MOUNT WITHOUT FRAME  
T56UB50X0

## Features

### Control

- Touch control

### Flexibility

- Flex Induction
- 4 zone induction hob
- no

### Special features


- Boost setting for all zones
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
- LED timer for each zone with switch off function and acoustic signal
- ReStart function
- Automatic pan recognition
- Safety cut out facility
- Control panel lock

### Technical information

- Cooking zones: 1 x Ø400 mmx240 mm,3.3 KW(max. Power levels3.7 KW) Induction or 2 x Ø 200 mm,2.2 KW(max. Powerlevels3.7 KW) Induction; 1 x Ø145 mm,1.4 KW(max. Power levels2.2 KW) Induction;1 x Ø210 mm,2.2 KW(max. Power levels3.7 KW) Induction
- Measurement: (H/W/D)51x592x522mm
- Installation dimensions: (ID/W/D)51 mmx560 mmx490 mm
- 60 cmwidth
- Length wire connection:110 cm
- Main switch
- Min. worktop thickness:16 mm
- Output7400 W
- Cable included in packaging




FLEX INDUCTION HOB, 60 CM, BLACK, SURFACE  
MOUNT WITHOUT FRAME  
T56UB50X0

Dimensioned drawings

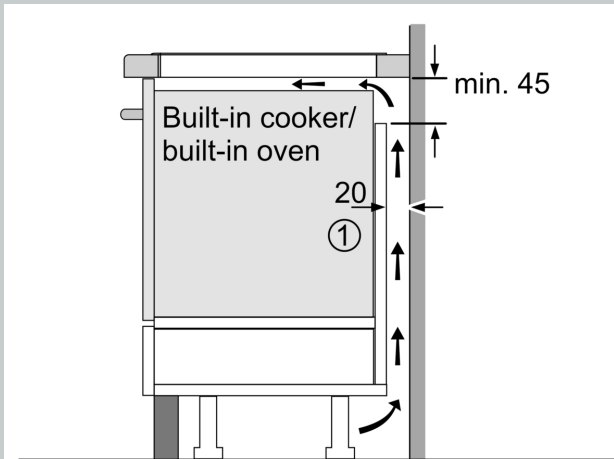

①  
Ventilation gap must  
be present

All measurements in mm

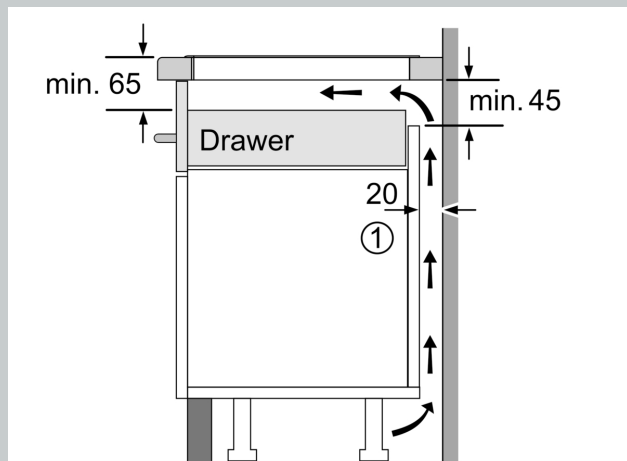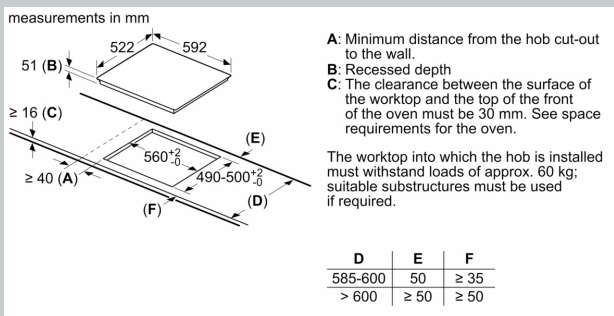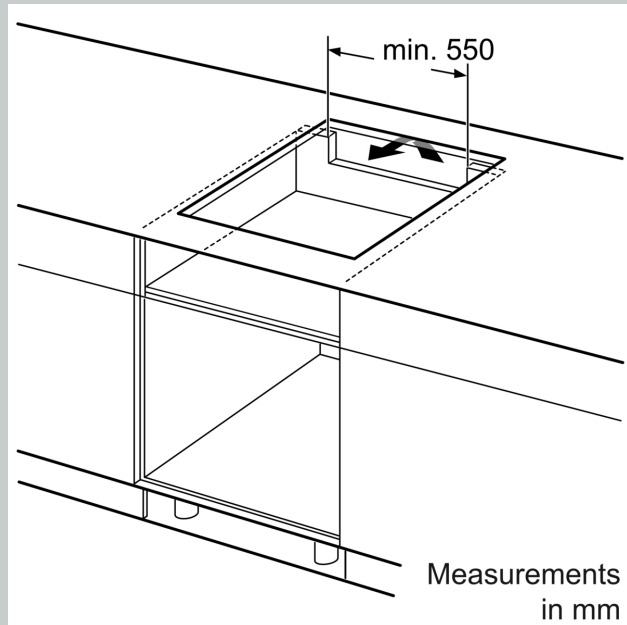

①  
Ventilation gap must  
be present.

Measurements in mm