



FLEX INDUCTION HOB, 80 CM, BLACK, SURFACE MOUNT WITHOUT FRAME T58UB10X0

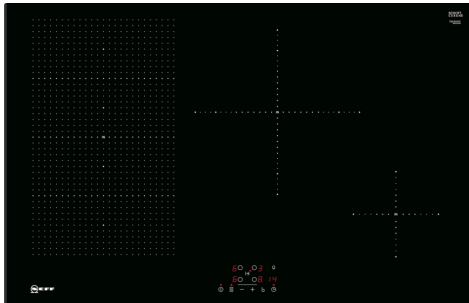

Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z943SE0	Set of 2 pots and 1 pan

FlexInduction hob with TouchControl.

- ✓ Touch Control – a convenient way to control hobs with just one touch and a timer if needed.
- ✓ Flex Induction – place your pots and pans within the flex zone anywhere you want and heat them exactly where they stand.
- ✓ Power Boost – optimized power level function for more flexible and even faster heating.
- ✓ Induction – the heat is generated directly in the cookware for precise cooking that stops when power is off.

Features

Technical Data

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Number of cooking zones: 4
 Required niche size for installation (HxWxD): 51 x 750-750 x 490-500 mm
 Width of the appliance: 802 mm
 Dimensions: 51x802x522 mm
 Dimensions of the packed product (HxWxD): . 126 x 953 x 603 mm
 Net weight: 16.9 kg
 Gross weight: 17.5 kg
 Residual heat indicator: Separate
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black
 Length electrical supply cord: 110.0 cm
 EAN code: 4242004234524
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



FLEX INDUCTION HOB, 80 CM, BLACK, SURFACE
MOUNT WITHOUT FRAME
T58UB10X0

Features

Control

- Touch control

Flexibility

- Flex Induction
- 4 zone induction hob
- no

Special features


- Boost setting for all zones
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones LED timer for each zone with switch off function and acoustic signal
- ReStart function
- Automatic pan recognition Safety cut out facility Control panel lock

Technical information

- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 280 mm, 2.6 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction
- Measurement: (H/W/D) 51 x 802 x 522 mm
- Installation dimensions: (ID/W/D) 51 mm x 750 mm x 490 mm
- 80 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 16 mm
- Output 7400 W
- Cable included in packaging



FLEX INDUCTION HOB, 80 CM, BLACK, SURFACE
MOUNT WITHOUT FRAME
T58UB10X0

Dimensioned drawings

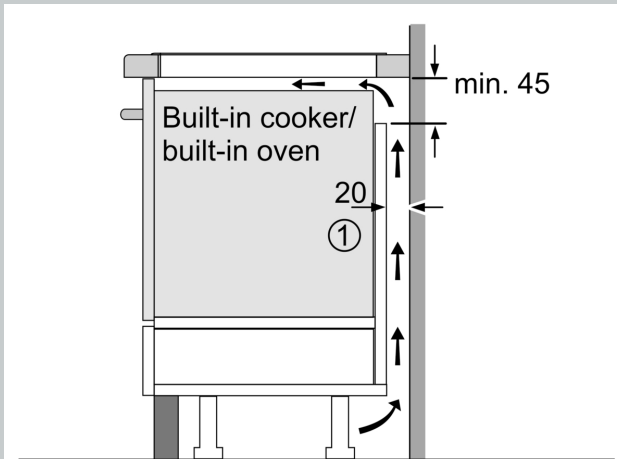

①
Ventilation gap must
be present

All measurements in mm

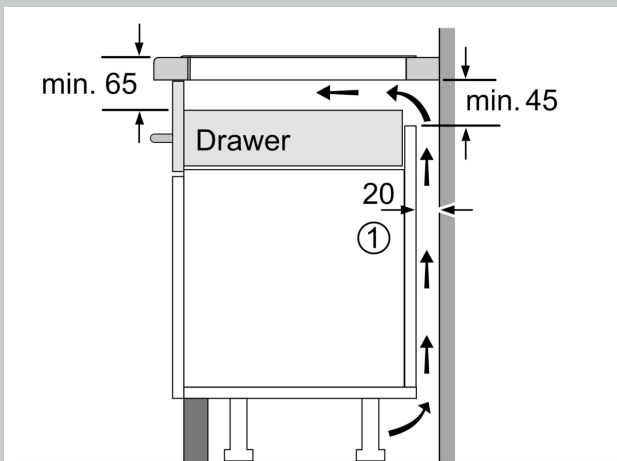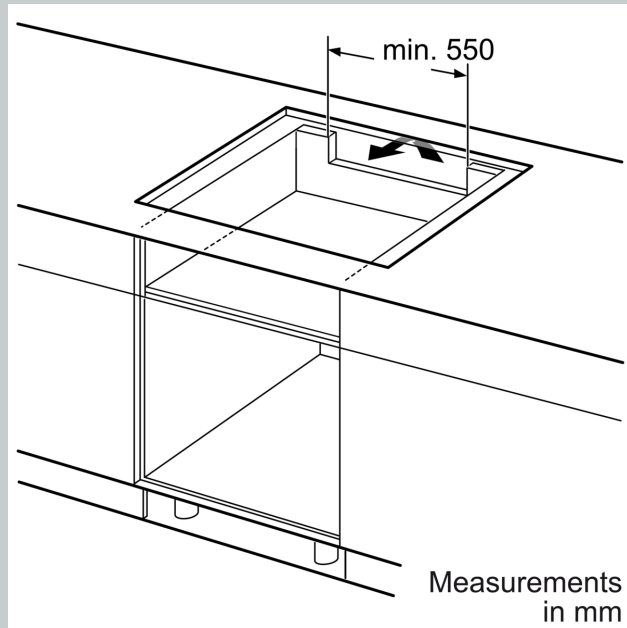

①
Ventilation gap must
be present.

Measurements in mm

