



N 90, FLEX INDUCTION HOB, 90 CM, BLACK,
SURFACE MOUNT WITH FRAME
T59TS51N0

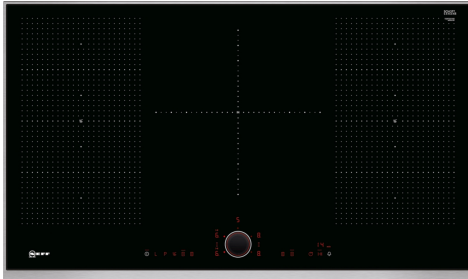

Optional accessories

Z9451X0	System pan diameter 15 cm
Z9453X0	System pan diameter 21cm
Z9454X0	Paella pan Ø 31 cm
Z9914X0	Connecting strip
Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z941CF0	Pan Ø 22 / 26 cm
Z941LP0	Pot Ø 14 (bottom) / 16 cm (top)
Z941LP1	Pot Ø 18 (bottom) / 20 cm (top)
Z943SE0	Set of 2 pots and 1 pan

FlexInduction Hob with TwistPad control.

- ✓ TwistPadFire® – our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Flex Induction – Your hob detects and heats your individual cookware.
- ✓ Power Move – Just slide your cookware to adjust the temperature.
- ✓ Frying Sensor – Monitors the temperature to prevent scorching.
- ✓ Power Boost – An extra surge of heat when you need fast results.

Features

Technical Data

Product name/family:	Cooking zone ceramic
Built-in / Free-standing:	Built-in
Energy input:	Electric
Number of cooking zones:	5
Required niche size for installation (HxWxD):	51 x 880-880 x 490-500 mm
Width of the appliance:	918 mm
Dimensions:	51x918x546 mm
Dimensions of the packed product (HxWxD):	126 x 1073 x 603 mm
Net weight:	20.7 kg
Gross weight:	24.5 kg
Residual heat indicator:	Separate
Location of control panel:	Front
Basic surface material:	Ceramic
Color of surface:	Black, Stainless steel
Color of frame:	Stainless steel
Length electrical supply cord:	110.0 cm
EAN code:	4242004192114
Voltage:	220-240 V
Frequency:	60; 50 Hz



N 90, FLEX INDUCTION HOB, 90 CM, BLACK,
SURFACE MOUNT WITH FRAME
T59TS51N0

Features

Control

- TwistPad® Fire
- Frying Sensor: 5 frying levels

Flexibility

- Ring zone triple, 2 Flex zones
- 5 zone induction hob

Special features

- Power Boost function for all zones
- PanBoost
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
- LED timer for each zone with switch off function and acoustic signal
- Count up timer
- ReStart function
- Automatic pan recognition
- Safety cut out facility
- Control panel lock
- Control panel suspension
- Keep warm function
- Energy consumption display

Technical information

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 230 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 320 mm, 3.3 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Powerstufe 3.7 KW) Induktion oder 2 x Ø 230 mm, 2.2 KW (max. Powerstufe 3.7 KW) Induction
- Measurement: (H/W/D) 51 x 918 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 880 mm x 490 mm
- 90 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 16 mm
- Output 11100 W
- Cable included in packaging

N 90, FLEX INDUCTION HOB, 90 CM, BLACK,
SURFACE MOUNT WITH FRAME
T59TS51N0

Dimensioned drawings

