


N 90, Built-in oven with added steam function, Stainless steel
B58VT68N0B



A

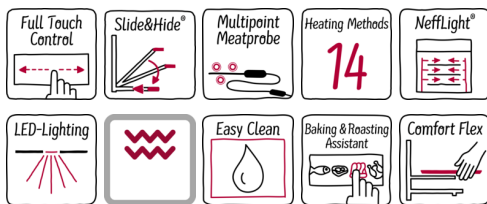

Optional accessories

Z11CR10X0	Baking and roasting grid (standard)
Z11SZ00X0	SeamlessCombination mounting kit
Z11SZ80X0	SeamlessCombination 60 + 29cm
Z11SZ90X0	SeamlessCombination 60 + 45cm
Z11TC10X0	ComfortFlex Rail (1 level)
Z12CB10A0	Baking tray, anthracite enamelled
Z12CM10A0	Moussaka pan, anthracite enamelled
Z12TF36X0	3 level telescopic rails, full ext,pyro
Z19DD10X0	Steam set for ovens

Built-in oven with VarioSteam and SLIDE&HIDE - fuller flavour and unrestricted access to the oven interior.

- ✓ Slide&Hide - the fully retracting oven door.
- ✓ VarioSteam - Steam assistance for CircuTherm ovens, that cooks food moist on the inside and crisp on the outside.
- ✓ The Multi Point roast thermometer helps the oven regulate the temperature and automatically adjust the cooking time.
- ✓ The perfect duo for cleaning: Pyrolysis after heavy use and EasyClean - the environment-saving option for fast oven cleaning.
- ✓ FullTouch Control - simple, precise oven control by fingertip touch on the smooth surface of the high resolution TFT colour display.
- ✓ NeffLight - perfect illumination of all four oven levels, even with the door shut.
- ✓ ComfortFlex - telescopic rails that come out far enough to let you grasp the baking sheet conveniently from the sides.

Features

Technical Data

Color / Material Front : Stainless steel

Built-in / Free-standing : Built-in

Integrated Cleaning system : Hydrolytic, Pyrolytic

Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550

Dimensions of the product (mm) : 595 x 596 x 548

Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 40.300

Usable volume of cavity (l) : 71

Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, pre-heating, warming
Oven control : electronic

Number of interior lights : 3

Approval certificates : CE, VDE

Length electrical supply cord (cm) : 120

EAN code : 4242004182047

Number of cavities (2010/30/EC) : 1

Energy efficiency class (2010/30/EC) : A

Energy consumption per cycle conventional (2010/30/EC) : 0.90

Energy consumption per cycle forced air convection (2010/30/EC) : 0.74

Energy efficiency index (2010/30/EC) : 87.1

Connection Rating (W) : 3450

Current (A) : 16

Voltage (V) : 220-240

Frequency (Hz) : 60; 50

Plug type : no plug



*N 90, Built-in oven with added steam function,
Stainless steel
B58VT68NOB*

Features

Heating Functions

- Oven with 14 heating methods:
 - 4D hot air
 - CircoTherm Eco
 - Top/Bottom heating
 - Top/bottom heating Eco
 - Hot-air grilling
 - Full surface grill
 - Small area grill
 - Pizza setting
 - Bread Baking
 - Bottom heating
 - Slow cooking
 - Defrost
 - Plate warming
 - Keep warm
- Additional heating methods with steam:
 - Reheating
 - Dough Proving
- Temperature range 40 °C - 275 °C
- Cavity volume: 71 litres

Design

- Touch control
- Anthracite enamel cavity with 4 shelf positions

Cleaning

- Pyrolytic self cleaning
- EasyClean Cleaning program
-

Convenience

- TFT colour graphic display with FullTouch Control
- Temperature proposal
 - Actual temperature display
 - Optical temperature control
 - AutoPilot
 - Sabbath setting
- Additional functions:
 - Descaling programme
 - Steam cooking function (system steamer accessory required)
 - Drying function
- SoftMove Door - SoftOpen & SoftClose
- Supporting systems: Bake and Roast assist, Automatic Programs
- Number of automatic programmes: 14 PC
- Multipoint MeatProbe
- Electronic clock
- Rapid heating-up
- LED lighting
- Large 1 litre water tank
- Water tank empty indicator
- Location of the steam generator is outside of the cavity.
- Cooling fan
- Stainless-steel fan
- Info button
- Revolution handle

Hook-in racks / rails

- Pull out system: Telescopic shelf rail. 1-level flexible, full extension, safety stop function

Accessories

- 2 x combination grid, 1 x universal pan

Cleaning



- Individual adjustable child lock
 - Residual heat indicator
 - Safety switch off

Technical Information

- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimension (hxwxh): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

N 90, Built-in oven with added steam function,
 Stainless steel
 B58VT68N0B

Dimensioned drawings

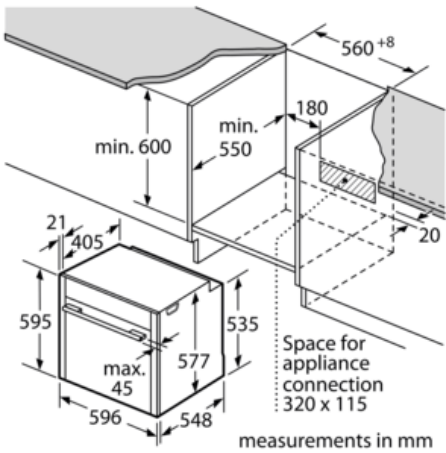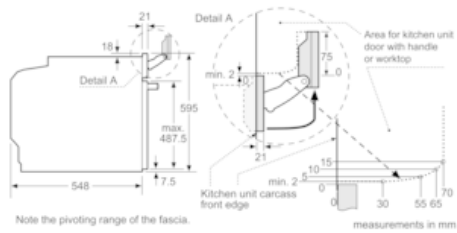

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

