

## N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B6ACH7AN0A



Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CB10E0 Baking tray, grey enamelled, Z11CL15E0 Lid for professional pan, enamelled, Z11CN15E0 Professional pan, enamelled, Z11CR10X0 Baking and roasting grid (standard), Z11CU10E0 Multipurpose pan, grey enamelled, Z11GT10X3 Glass roasting dish, 5,4I, Z11GU20X0 Glasspan, Z11TI15X0 Cliprails, Z12CL10A0 Lid for professional pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z1352X0 Pizza pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1608BX0 Full ext rails, level independent, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens

# CircoTherm - Neff's outstanding hot-air system for simultaneous baking and roasting on up to 3 levels.

- $\sqrt{}$  Hide The unique fully disappearing oven door.
- $\checkmark\,$  CircoTherm The smart hot-air function lets you bake on up to three levels at once and achieve even cooking results.
- $\checkmark\,$  Pyrolytic Self-Cleaning with Easy Clean the duo for optimal cleaning: pyrolytic for a full clean and Easy Clean for a quick between clean.

Color / Material Front:	Stainless steel
Built-in / Free-standing:	
Door opening:	
Integrated Cleaning system:	
Control Panel Material:	
Door Material:	
Dimensions:	
Dimensions of the packed product (HxWxD)	
Min. required niche size for installation (HxW	
560-568 x 550 mm	/XD)
	257(00(15
Cavity dimensions:	
Usable volume of cavity:	
Number of interior lights:	
Net weight:	
Gross weight:	
EAN code:	
Connection Rating:	
Fuse protection:	
Voltage:	220-240 V
Frequency:	60; 50 Hz
Length electrical supply cord:	120.0 cm





# N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B6ACH7AN0A

### Heating Functions

- Oven with 8heating methods:
- CircoTherm
- Top/Bottom heat CircoRoasting Full surface grill CircoTherm Intensive / Pizza setting Bread Baking Bottom heat Hotair gentle
- Temperature range 30 °C 275 °C
- Cavity volume: 71 l

#### Design

- Rotary Control Knobs, Retractable controls
- Embossed Oven door handle
- Full glass inner door safe touch door
- Quadruple glass door panel

### Convenience

- Electronic clock
- Rapid heat-up: Reduce the preheat time at the touch of a button
- Independent oven interior light button, Halogen lighting
- Hide, the retracting oven door.
- Enamelled cavity (grey) with 4 shelf positions
- Cooling fan

#### Safety Features

- Pyrolytic self-cleaning: The fastest way to clean an oven. At 485°C everything turns to ash, so no chemical cleaners are necessary with this cleaning method. When the program is finished, just let the oven cool down and wipe it out with a damp cloth. That's all there is to it
- Easy Clean cleaning program: Just add 400ml water and a drop of washing-up liquid in the base pan (recessed area on the bottom of the oven cavity) and run the EasyClean program. This helps to soften baked-on residue so that you can just wipe it down for fast and uncomplicated cleaning
- Individual adjustable child lock
- Residual heat indicator Safety switch off Automatic door lock during pyrolysis

#### Accessories


• combination grid, 1 x Universal pan


#### **Technical Information**


- Maximum window temperature 30° C
- Length of mains cable: 120 cm
- Nominal voltage: 220 240 V
- Total connected load electric: 3.6 KW
- Appliance dimension (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing



N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B6ACH7AN0A

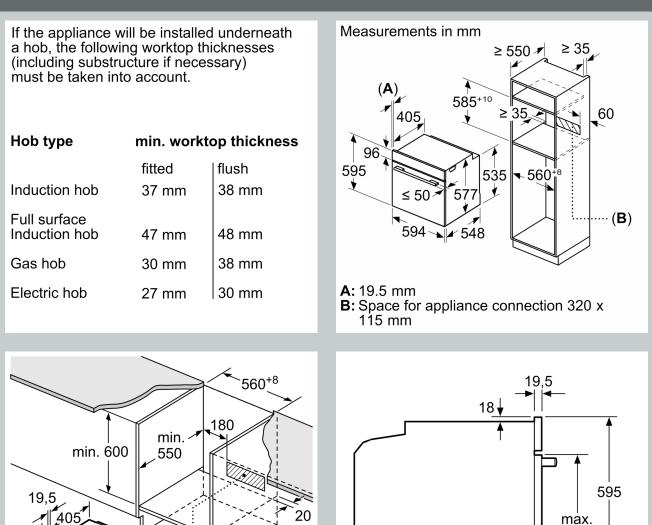








# Installation with a hob.



measurements in mm