


## N 90, BUILT-IN COMPACT OVEN WITH STEAM FUNCTION, 60 X 45 CM, STAINLESS STEEL C18FT56H0B



Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ60X0 SeamlessCombination 45 + 14cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CU30X0 Steam container, unpunched, size S, Z13CU31X0 Steam container, punched, size S, Z13CV05S0 Cover Strip, Z13CV06S0 Decor strip, Z13CX62X0 Vacuum bags 180 x 280 mm, 100 pcs., Z13CX64X0 Vacuum bags 240 x 350 mm, 100 pcs., Z13TC10X0 ComfortFlex Rail (1 level) f. steam, Z13TC14X0 ComfortFlex Rail (1)&racks,45cm f. steam

- ✓ Slide - The rotating handle that sits comfortably in your hand.
- ✓ CircoTherm – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Eco Clean with Easy Clean - the duo that makes oven cleaning easier
- ✓ Full Touch Control – Simple, precise control by touch on the high-resolution TFT colour display.
- ✓ Wi-Fi enabled oven - Unleash your creativity via the Home Connect app.

Color / Material Front: .....Stainless steel  
Built-in / Free-standing: ..... Built-in  
Door opening: ..... Drop down  
Integrated Cleaning system: ..... EcoClean program  
Control Panel Material: .....Stainless steel  
Door Material: ..... Glass  
Dimensions: ..... 455x596x548 mm  
Dimensions of the packed product (HxWxD): . 540 x 660 x 690 mm  
Min. required niche size for installation (HxWxD): .....450-455 x 560-568 x 550 mm  
Cavity dimensions: ..... 235 x 480 x 415 mm  
Usable volume (of cavity) - NEW (2010/30/EC): .....47 l  
Number of interior lights: ..... 1  
Net weight: ..... 35.0 kg  
Gross weight: ..... 37.2 kg  
EAN code: .....4242004236412  
Connection Rating: ..... 3300 W  
Fuse protection: ..... 16 A  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz  
Length electrical supply cord: ..... 150.0 cm



4 242004 236412

## N 90, BUILT-IN COMPACT OVEN WITH STEAM FUNCTION, 60 X 45 CM, STAINLESS STEEL C18FT56H0B

### Heating Functions

- Compact steam oven with 13 cooking functions/heating methods:
- CircoTherm
- Bread Baking Full surface grill CircoTherm Eco Centre area grill Top/Bottom heat Top/Bottom heat Eco Pizza setting Low temperature / slow cooking Bottom heat CircoRoasting Pre-Heating Keep warm
- Additional heating methods with steam:
- FullSteam: 100% Steam
- Reheating with up to 100% Steam Dough Proving with up to 100% Steam Defrost with steam Sous-vide cooking with up to 100% steam
- Temperature range 40 °C - 250 °C

### Design

- Cavity volume: 47 l
- Anthracite enamel cavity with 3 shelf positions

### Cleaning

- Easy Clean cleaning program: Just add 400ml water and a drop of washing-up liquid in the base pan (recessed area on the bottom of the oven cavity) and run the EasyClean program. This helps to soften baked-on residue so that you can just wipe it down for fast and uncomplicated cleaning
- Additional functions:
- Descaling program: A descaling function to remove limescale from the steam generator
- Drying function: Dries the cooking compartment after a steam function

### Convenience

- 5.7" TFT colour and graphics display with FullTouch control
- Automatic Temperature control for each function
- Temperature control and display on screen Residual heat indicator automatic programming Sabbath function Meat probe
- SoftMove oven door with soft close, with SoftOpen system, Bottom hinged door
- Built in cooking functions: Baking and Roasting Assistant: Takes the guess work out by recommending the ideal heating mode, temperature and time for a wide variety of dishes, which you can manually adjust to your desire to ensure perfect results, Automatic programs: Select a program, enter the weight of your food, and the automatic program will apply the most optimal settings, no manual settings required
- automatic programming, 30 PC automatic programs
- MultiPoint MeatProbe: measures the inside heat at three points to ensure the right core temperature is reached and the meat is cooked for the correct duration of time
- Electronic clock
- Rapid heat-up: Reduce the preheat time at the touch of a button
- Independent oven interior light button, LED lighting
- Water tank empty indicator
- Location of the steam generator is outside of the cavity.
- Cooling fan

- Stainless-steel fan
- Individual adjustable child lock
- Residual heat indicator Safety switch off Start button door contact switch
- HomeConnect ready on Wi-Fi, Remote diagnostics
- Home Connect helps you to unleash your cooking creativity by allowing you to manage your oven, warming drawer and coffee machine over your Wi-Fi. Tap via the app, speak to your oven with voice control, and make appliances interact with one another automatically. Home Connect is an ever-growing platform that brings the future to your kitchen

### Rails

- Telescopic rails: ComfortFlex shelf supports (includes 1 telescopic rail)




### Accessories

- Small perforated stainless steel tray, Large perforated stainless steel tray, Small solid stainless steel tray, 1 x Wire rack, 1 x Universal pan


### Technical Information

- Length of mains cable: 150 cm
- Appliance dimension (HxWxD): 455 mm x 596 mm x 548 mm
- Please reference the built-in dimensions provided in the installation drawing

N 90, BUILT-IN COMPACT OVEN WITH STEAM  
FUNCTION, 60 X 45 CM, STAINLESS STEEL  
C18FT56H0B

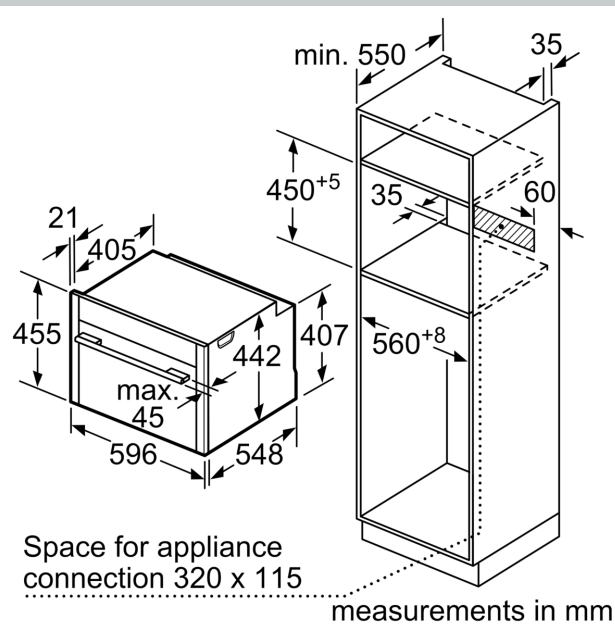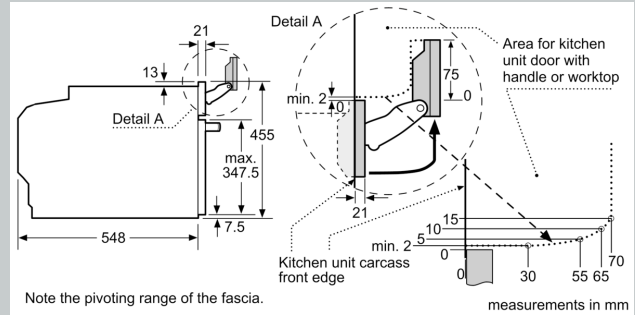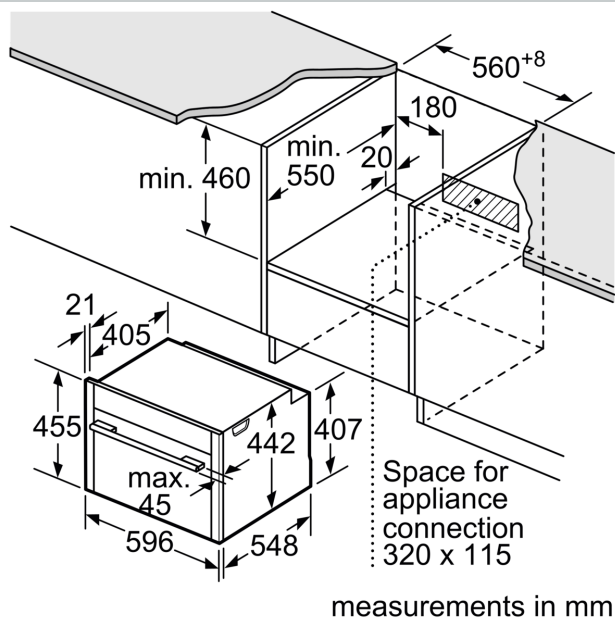

Installation with a hob.

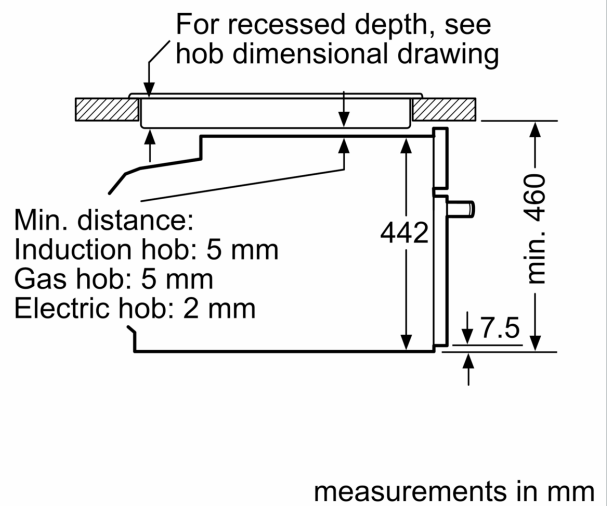

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type                   | min. worktop thickness |       |
|----------------------------|------------------------|-------|
|                            | fitted                 | flush |
| Induction hob              | 42 mm                  | 43 mm |
| Full surface Induction hob | 52 mm                  | 53 mm |
| Gas hob                    | 32 mm                  | 43 mm |
| Electric hob               | 32 mm                  | 35 mm |