


N 50, Wall-mounted cooker hood, 90 cm, Stainless steel  
D79SH52N0



A<sup>+</sup>

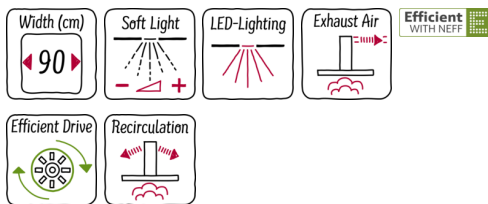

#### Features

##### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : Australia Standards, CE, VDE  
 Length electrical supply cord (cm) : 130  
 Height of the chimney (mm) : 582-908/582-1018  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 18.018  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 460  
 Boost position output recirculating (m<sup>3</sup>/h) : 440  
 Maximum output recirculating air (m<sup>3</sup>/h) : 340  
 Boost position air extraction (m<sup>3</sup>/h) : 730  
 Number of lights : 3  
 Noise level (dB) : 55  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable aluminium  
 EAN code : 4242004174486  
 Connection Rating (W) : 139  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 60; 50  
 Plug type : GARDY plug w/ earthing  
 Installation typology : Wall-mounted



4 242004 174486

#### Optional accessories

Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5276X0	CleanAir Recirculation Kit

*N 50, Wall-mounted cooker hood, 90 cm, Stainless steel*  
*D79SH52N0*

Features

- Wall mounted design
- Appliance colour: Stainless steel
- Suitable for ducted or re-circulated extraction
- Electronic saturation display for metal grease and active carbon filter
- EASY Installation
- Electronic controls
- Push button controls (3-stage + 2 intensive) with 7-segment display
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 460 m<sup>3</sup>/h  
Intensive 730 m<sup>3</sup>/h
- Automatic run-on function - 30mins
- Noise min./max. Normal Level: 45/55 dB\*
- Saturation indicator for metal & carbon filters
- Light dimmer function
- Dishwasher safe metal grease filters
- Intensive operation automatic revert - 6mins
- Additional noise insulation
- 139 W total connected load
- Electrical cable length 1.3 m
- Dimensions exhaust air (HxWxD): 628-954 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
689 x 900 x 500 mm - mounting with outer chimney  
809-1139 x 900 x 500 mm - mounting with telescopic chimney

N 50, Wall-mounted cooker hood, 90 cm, Stainless steel  
D79SH52N0

Dimensioned drawings

