


N 90, Wall-mounted cooker hood, 90 cm, Stainless steel  
D96BMU5N0A



A<sup>+</sup>

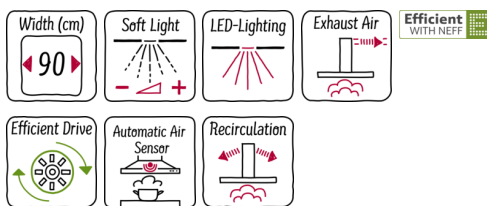

Flat design in a modern shape - our classic design hood 'box'.

- ✓ Automatic Air Sensor – automatically adjusts the extraction rate to match the situation in the kitchen
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED Lighting – a clear illumination whilst cooking thanks to the energy-saving LED lights

### Features

#### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : Australia Standards, VDE  
 Length electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 19.633  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 430  
 Boost position output recirculating (m<sup>3</sup>/h) : 385  
 Maximum output recirculating air (m<sup>3</sup>/h) : 311  
 Boost position air extraction (m<sup>3</sup>/h) : 843  
 Number of lights : 3  
 Noise level (dB) : 55  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable stainless steel  
 EAN code : 4242004235965  
 Connection Rating (W) : 165  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : AU plug  
 Installation typology : Wall-mounted

#### Optional accessories

Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5276X0	CleanAir Recirculation Kit



4 242004 235965

*N 90, Wall-mounted cooker hood, 90 cm, Stainless steel*  
D96BMU5N0A

## Features

### Design

- Appliance colour: Stainless steel
- Wall mounted design

### Performance

- TouchControls
- 3-stage + 2 intensive
- Automatic run on for 10 min.
- Electronic saturation display for metal grease and active carbon filter
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 430 m<sup>3</sup>/h  
Intensive 843 m<sup>3</sup>/h
- Noise min. / max. Normal Level: 42/55 dB
- LED lighting with dimmer function
- Light Intensity: 389 lux
- Colour Temperature: 3500 K
- EfficientDrive brushless motor

### Technical Information

- Suitable for ducted or re-circulated extraction
- Appliance (ducted air): 628-954 x 898 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
689 x 898 x 500 mm - mounting with outer chimney  
809-1139 x 898 x 500 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- 165 W total connected load
- Electrical cable length 1.3 m
- Voltage: 220 - 240 V

N 90, Wall-mounted cooker hood, 90 cm, Stainless steel  
 D96BMU5N0A

Dimensioned drawings

