


N 70, Gas hob, 60 cm, Stainless steel
T26DS59N0A



COOKING PASSION SINCE 1877

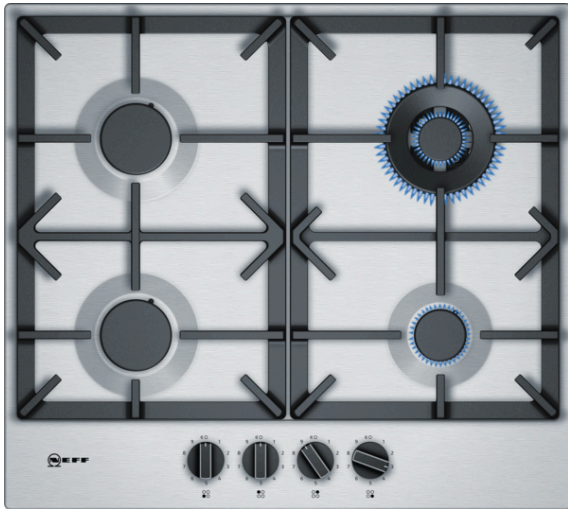

The gas cooktop with a stainless-steel surface design and incrementally adjustable FlameSelect.

- ✓ FlameSelect - Thanks to the clever control of gas flow, the flame can be precisely adjusted in 9 graduations. Always the same reliable and precise power levels for outstanding cooking convenience.
- ✓ Powerful cooking at up to 13.6 MJ/h.
- ✓ Continuous cast-iron pan supports for maximum stability and cooking convenience.

Features

Technical Data

Product name/family : gas hob w integrated controls

Construction type : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 4

Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492

Width of the product (mm) : 582

Dimensions of the product (mm) : 45 x 582 x 520

Dimensions of the packed product (HxWxD) (mm) : 141 x 651 x 578

Net weight (kg) : 12.107

Gross weight (kg) : 13.0

Residual heat indicator : without

Location of control panel : Hob front

Basic surface material : Stainless steel

Color of surface : Stainless steel, Stainless steel

Color of frame : Stainless steel, Stainless steel

Approval certificates : Australia Standards, Australia Standards

Length electrical supply cord (cm) : 100

EAN code : 4242004218159

Electrical connection rating (W) : 1

Gas connection rating (W) : 8000

Current (A) : 3

Voltage (V) : 220-240

Frequency (Hz) : 50; 60



4 242004 218159

N 70, Gas hob, 60 cm, Stainless steel
T26DS59NOA

Features

Design

- Stainless steel

Comfort & Convenience

- FlameSelect (9 steps)
- Sword control knobs
- Knob ignition
- Enamelled cast iron pan supports on non-scratch rubber feet

Size & Power

- 4 Gas Burners
- 1 High-speed, 1 Standard, 1 Economy, 1 Wok burner
- Dual wok burner
- Left rear: Standard burner up to 6.85 Mj/h
- Right rear: Wok burner, High-Speed Burner up to 13.6 Mj/h
- Left front: Standard burner up to 6.85 Mj/h
- Right front: Economy burner up to 4 Mj/h

Safety and Environment

- Flame failure device fitted to each individual burner
- Nozzle presetting/main jet: Natural gas 10 mbar (Australian)

Dimensions

- Power cord length: 100 cm

Supplied Accessories

- Liquid gas nozzles (28-30/37mbar) included

N 70, Gas hob, 60 cm, Stainless steel
T26DS59N0A

Dimensioned drawings

