


N 90, FLEX INDUCTION HOB, 60 CM, BLACK,
SURFACE MOUNT WITH FRAME
T56TS31N0



Neff 60 cm FlexInduction cooktop with TwistPad Fire control and 3 induction zones.

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 3
Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
Width of the appliance: 606 mm
Dimensions: 51x606x546 mm
Dimensions of the packed product (HxWxD): . 126 x 753 x 603 mm
Net weight: 12.7 kg
Gross weight: 15.0 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black, Stainless steel
Color of frame: Stainless steel
Length electrical supply cord: 110.0 cm
EAN code: 4242004191797
Voltage: 220-240 V
Frequency: 60; 50 Hz

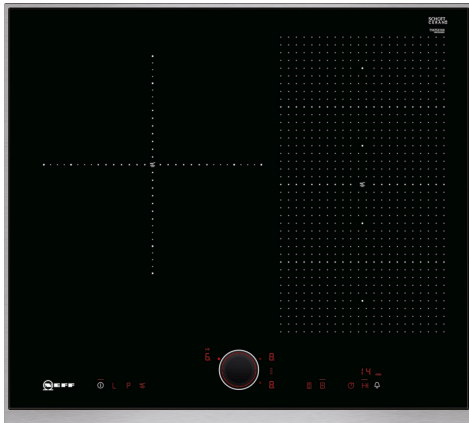

Z9401FF0 Flex Pan, large, Z9401TY0 Teppan Yaki, Z9403FF0 Flex Pan set, 3 pcs., Z9404FF0 Flex Pan set, 4 pcs., Z9404SE0 4 pieces Set, Z9406SE0 6 pieces Set, Z9410ES0 Espresso maker 4 cups, Z9410X1 Stainless Steel roaster with glas lid, Z9415X1 Steaming Rack for Stainless Steel roaste, Z9416X2 Griddle Plate, Z9417X2 Teppan Yaki (large), Z9428FE0 Iron pan Ø 18 / 28 cm, Z943SE0 Set of 2 pots and 1 pan, Z9451X0 System pan diameter 15 cm, Z9453X0 System pan diameter 21cm, Z9455X0 System pan diameter 28 cm, Z9914X0 Connecting strip

*N 90, FLEX INDUCTION HOB, 60 CM, BLACK,
SURFACE MOUNT WITH FRAME
T56TS31N0*

Design

- 60 cm width
- Black ceramic glass with stainless steel flush-fitted trim
- Neff TwistPadFire magnetic illuminated control dial
- Digital display for each cooking zone with power level

Flexibility

- 3 induction zones
- 1 x FlexInduction zone. Each zone has 2 use options: 2 individual induction cooking zones or combine the front and rear zones together to form one large induction cooking zone
- 17 power levels for each cooking zone
- PowerBoost: rapid heating for large pots of water, automatically turns off right on time to prevent overheating
- PanBoost function heats up the pan for 30 seconds at an extremely high power. To avoid burning the cooking zone then automatically reduces the power afterwards. Fast, safe and easy to use
- PowerMove: allows you to divide your FlexInduction cooktop into three different heat zones; high, medium, and keep warm. Slide your pot across the zones to adapt the heat level, allowing you to focus on your seasoning instead of continuously adapting your heat settings


Comfort & Convenience

- Keep warm function for all cooking zones
- FryingSensor with 5 temperature levels. It maintains the selected temperature by continuously making automatic heat adaptations to maintain the temperature, making burning almost impossible
- Residual heat indicator (digital 2 stage: H/h)
- LED display and timer with auto switch off for all cooking zones, Alarm clock, Stopwatch function
- Power ON indicator
- Automatic pan recognition sensor
- Power management function
- Automatic Safety switch-off
- Childproof lock
- WipeProtection

Technical information

- Installation measurements: 560 mm x 490 mm
- Min. worktop thickness: 16 mm
- 7.4 KW total connected load
- Length wire connection: 110 cm
- Voltage: 220 - 240 V
- 1 x Ø 380 mmx210 mm, 3.3 KW (max. Power level 3.7 KW) Induction, or 2 x Ø 210 mm, 2.2 KW (max. Power level 3.7 KW) Induction, plus 1 x Ø 280 mm Induction

N 90, FLEX INDUCTION HOB, 60 CM, BLACK,
SURFACE MOUNT WITH FRAME
T56TS31N0

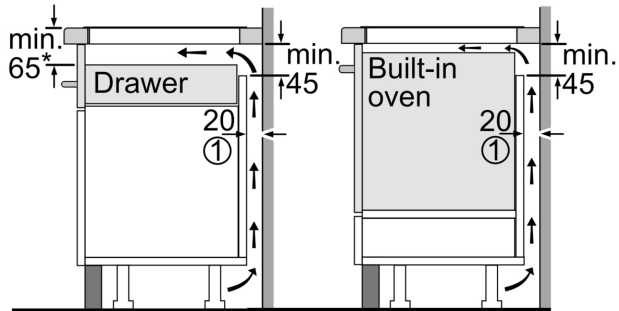


①
Ventilation gap must
be present

* Min. 70 for all induction
hobs integrated flush
with surrounding surfaces

Measurements
in mm

measurements in mm

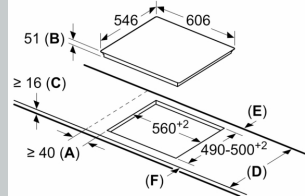

A: Minimum distance from the hob cut-out to the wall.

B: Recessed depth

C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

| D | E | F |
|---------|------|------|
| 585-600 | 50 | ≥ 35 |
| > 600 | ≥ 50 | ≥ 50 |