



N 90, Induction hob with integrated ventilation system, 80 cm
T58TS6BNO



COOKING PASSION SINCE 1877

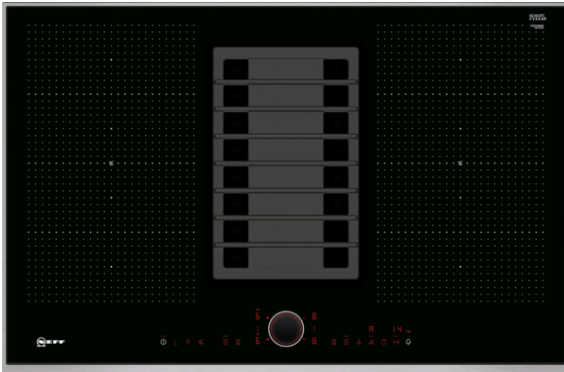

- ✓ The TwistPad Fire is a removable, magnetic, illuminated control knob that gives you precise, convenient control over all cooking zones. And to make things even easier, only the selectable functions are illuminated.
- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓
- ✓
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ PowerTransfer - When you reposition a pot on the extended FlexZone, your settings automatically follow the cookware.

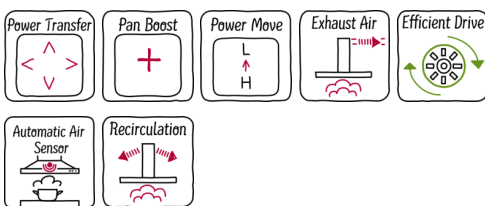

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Required niche size for installation (HxWxD) : 197 x 780-780 x 490-490
 Width of the product (mm) : 826
 Dimensions of the product (mm) : 197 x 826 x 546
 Dimensions of the packed product (HxWxD) (mm) : 330 x 940 x 760
 Net weight (kg) : 28.444
 Gross weight (kg) : 35.0
 Residual heat indicator : without
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black, Stainless steel
 Color of frame : Stainless steel
 Approval certificates : Australia Standards, CE, VDE
 Length electrical supply cord (cm) : 110
 Knob Material : Plastic
 Sealed Burners : No
 heating with booster : All
 Power of 2nd heating element (kW) : 3.3
 Power of 2nd heating element (kW in boost) : 3.7
 Maximum output air extraction (m³/h) : 551
 Boost position output recirculating (m³/h) : 618
 Maximum output recirculating air (m³/h) : 557
 Boost position air extraction (m³/h) : 684
 Noise level (dB) : 70
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 6
 Grease filter type : Cassette
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Main colour of product : Black
 Approval certificates : Australia Standards, CE, VDE
 Length electrical supply cord (cm) : 110
 Required niche size for installation (HxWxD) : 197 x 780-780 x 490-490
 Dimensions of the product (mm) : 197 x 826 x 546
 Dimensions of the packed product (HxWxD) (mm) : 330 x 940 x 760
 Net weight (kg) : 28.444
 Gross weight (kg) : 35.0

Optional accessories

Z8100X1	Exhaust kit
Z8200X1	Recirculating kit
Z8500X0	Recirculation filter
Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z9442X0	Set of 3 pots and 1 pan



*N 90, Induction hob with integrated ventilation
system, 80 cm
T58TS6BNO*

Features

Handling

- DirectSelect Touch Controls

Flexibility

- 2 Flex zones
- 4 induction zones
- Cooking zones:
 - 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power level 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power level 3.7 KW) Induction;
 - 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power level 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power level 3.7 KW) Induction

Comfort & Convenience

- PowerBoost function for each cooking zone
- PanBoost
- MoveMode (3 levels)
- yes
- 17 - stage power setting for each cooking zone
- 2 stage residual heat indicator for each zone
- Automatic pan recognition sensor
 - Power management function
 - Automatic Safety switch-off
 - Childproof lock
 - WipeProtection
- ReStart function
- QuickStart - Quick and automatic first pot detection
- Keep warm function for all cooking zones
- PerfectFry sensor with 5 temperature settings
- Digital display
- Time with time programming functions
 - Alarm clock
 - count-up timer, per cooktop

Design

- Black ceramic glass with stainless steel flush-fitted trim

Ventilation

- Fully-automatic extraction functionality with air quality sensor
- Fully-automatic fan speed level control or optionally manual control by TwistPad Fire user interface
- High-performance blower, Efficient BLDC-technology
- 9 fan speed levels plus 1 intensive setting
- Automatic 30 minutes run-on function
- Removable and detachable grease filter and liquid collector unit, dishwasher safe
 - integrated stainless steel grease filters, dishwasher safe
 - condensate and liquid collector unit; ca. 200ml capacity; dishwasher safe
- Cast-iron air inlet grid, heat resistant, dishwasher safe
- Saturation indicator for grease filter
- Extraction rate according to EN 61591:
 - min. Normal use 150m³/h
 - max. Normal use 550 m³/h
 - Intensive setting 690 m³/h
- Noise min./max. Normal: 39/69dB
- Suitable for ducted or re-circulated extraction (Accessory is required)

Technical information








- Appliance measurements (H/W/D): 197 mm x 826 mm x 546 mm
- Installation dimensions: (ID/W/D) 197 mm x 780 mm x 490 mm
- 80 cm width
- Length wire connection: 110 cm
- 7.4 kW total connected load
- Voltage: 220 - 240 V

Optional accessories

- Z8100X1, Z8200X1, Z8500X0, Z9410X1, Z9415X1, Z9416X2, Z9417X2, Z943SE0, Z9442X0, Z9451X0, Z9452X0, Z9453X0
- For ducted extraction extraction kit (accessory Z8100X0) required
- For recirculated extraction cleanAir recirculating kit (accessory Z8200X1) required
-

N 90, Induction hob with integrated ventilation system, 80 cm
T58TS6BN0

Dimensioned drawings

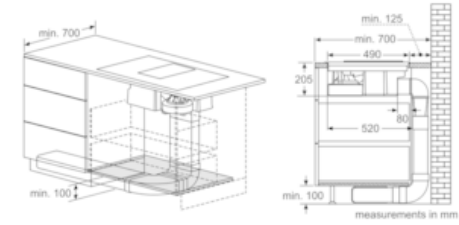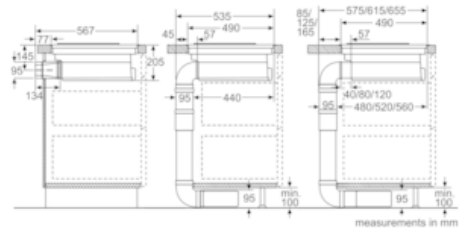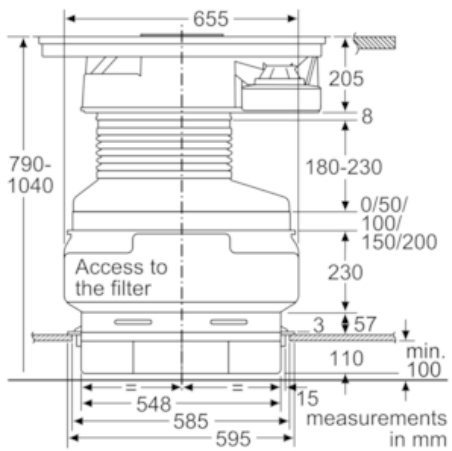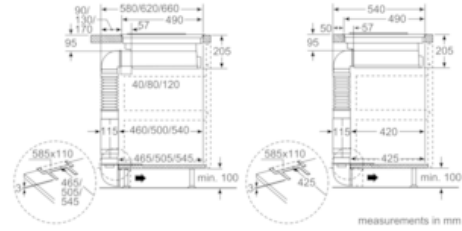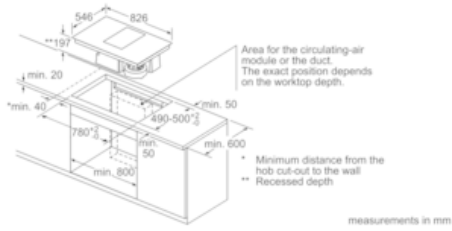

*N 90, Induction hob with integrated ventilation
system, 80 cm
T58TS6BN0*

Dimensioned drawings

