


## N 90, FLEX INDUCTION COOKTOP, 80 CM, BLACK, T68TS61N0

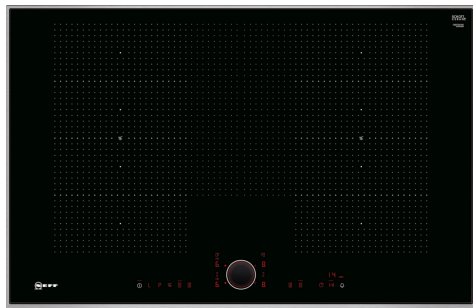

Neff 80 cm FlexInduction cooktop with TwistPad Fire control and 4 induction zones.

- ✓ TwistPadFire – Our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Power Move – Just slide your cookware to adjust the temperature.
- ✓ Power Boost – An extra surge of heat when you need fast results.
- ✓ Induction - Heat generated directly in cookware means precise cooking that stops instantly when off.
- ✓ Power Move - Change temperature with a simple slide of your cookware.

Z9401FF0 Flex Pan, large, Z9401TY0 Teppan Yaki, Z9403FF0 Flex Pan set, 3 pcs., Z9404FF0 Flex Pan set, 4 pcs., Z9404SE0 4 pieces Set, Z9406SE0 6 pieces Set, Z9410ES0 Espresso maker 4 cups, Z9410X1 Stainless Steel roaster with glas lid, Z9415X1 Steaming Rack for Stainless Steel roast, Z9416X2 Griddle Plate, Z9417X2 Teppan Yaki (large), Z9428FE0 Iron pan Ø 18 / 28 cm, Z943SE0 Set of 2 pots and 1 pan, Z9451X0 System pan diameter 15 cm, Z9453X0 System pan diameter 21cm, Z9455X0 System pan diameter 28 cm, Z9914X0 Connecting strip

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Total number of positions that can be used at the same time: 4  
Required niche size for installation (HxWxD): ..... 51 x 750-780 x 490-500 mm  
Width of the appliance: ..... 826 mm  
Dimensions: ..... 51x826x546 mm  
Dimensions of the packed product (HxWxD): . 126 x 953 x 603 mm  
Net weight: ..... 16.8 kg  
Gross weight: ..... 20.4 kg  
Residual heat indicator: ..... Separate  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black, Stainless steel  
Color of frame: ..... Stainless steel  
Length electrical supply cord: ..... 110.0 cm  
EAN code: ..... 4242004190882  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz



## N 90, FLEX INDUCTION COOKTOP, 80 CM, BLACK, T68TS61N0

### Design

- Black ceramic glass with stainless steel flush-fitted trim
- 80 cm: space for 4 pots or pans.

### Flexibility of cooking zones

- 2 Flex Induction Zones with extended flex: use cookware within the 40cm long zone or even place cookware horizontally on the extended zone.
- Cooking zone front left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 230 mm, 200 mm, 2.2 KW (max power 3.7 KW)
- Cooking zone front right: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zones will be automatically joined or separated based on the shape and size of the cookware placed.

### Comfort & Convenience

- Neff TwistPadFire magnetic illuminated control dial: directly control the power with the illuminated and removable magnetic control knob.
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- LED display and timer with auto switch off for all cooking zones: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer
- : an alarm sounds at the end of the time set (e.g. for pasta).
- Timer / Alarm clock: shows how much time has passed since starting the timer (e.g. for potatoes).

### Time saving & Efficiency

- Power Boost function for all cooking zones: boil water faster with up to 50% more power than at the highest standard level.
- PowerMove: allows you to divide your FlexInduction cooktop into three different heat zones; high, medium, and keep warm. Slide your pot across the zones to adapt the heat level, allowing you to focus on your seasoning instead of continuously adapting your heat settings: increase or decrease the power level simply by moving the pot forwards or backwards.
- PowerTransfer: when moving a pot to a different cooking zone (Flex zone), transfer all previous settings to the new zone at the touch of a button.
- QuickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart function: Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

### Cooking Assistance

- FryingSensor with 5 temperature levels. It maintains the selected temperature by continuously making automatic heat adaptations to maintain the temperature, making burning almost impossible: prevents scorching with the automatic temperature regulation of

the integrated sensor.


### Safety

- Residual heat indicator (digital 2 stage: H/h): indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- demo mode, WipeProtection, Childproof lock, power management function, Automatic pan recognition sensor, Automatic Safety switch-off: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic Safety switch-off: for safety reasons, heating stops after a preset time without interaction.
- Energy consumption: shows the electricity consumption of the last cooking process.

### Installation


- Dimensions of the product (HxWxD mm): 51 x 826 x 546
- Required niche size for installation (HxWxD mm) : 51 x 750 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Power cord: 1.1 m, loose insert in packaging

N 90, FLEX INDUCTION COOKTOP, 80 CM, BLACK,  
T68TS61N0

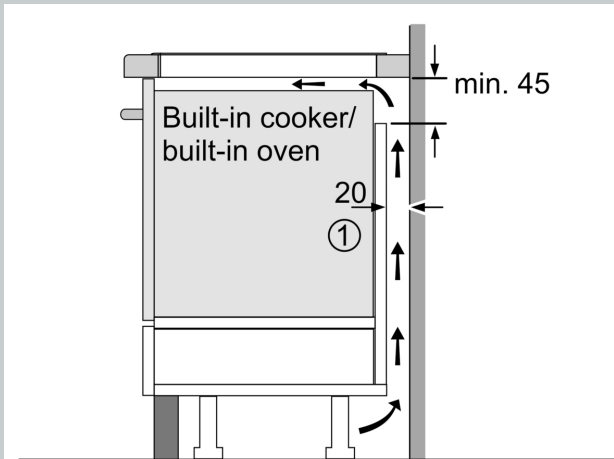



①  
Ventilation gap must  
be present

All measurements in mm

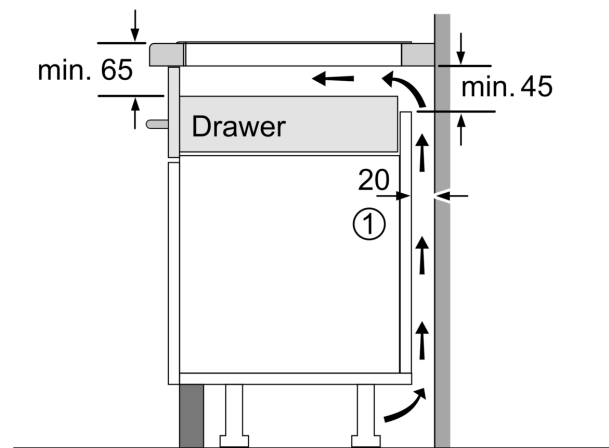

①  
Ventilation gap must  
be present.

Measurements in mm

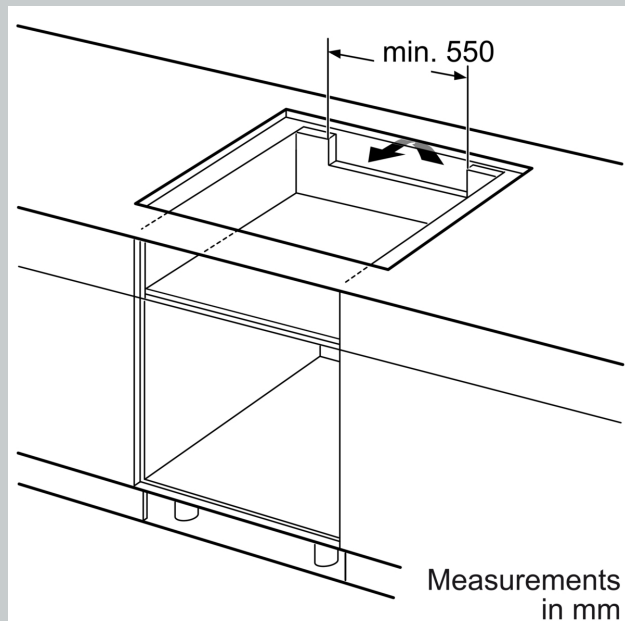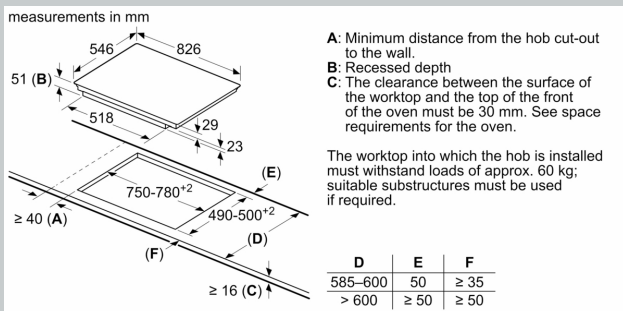

Measurements  
in mm