


N 70, GAS HOB, 75 CM, TEMPERED GLASS, BLACK  
T27PIQ4S0

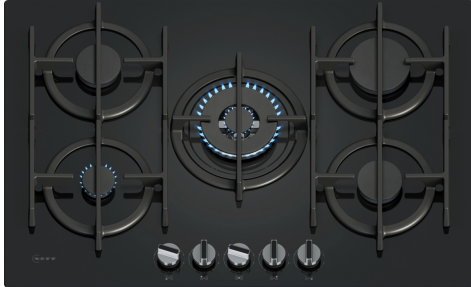

The gas hob with precise flame control, removable dials and semi-continuous pan supports that are suitable for dishwashers - for Comfort Clean.

- ✓ FlameSelect®: Gain precise control of your flame.
- ✓ Metallic Sword Dial: Precise and removable for easy cleaning.
- ✓ Cast Iron Pan Supports: Maximum stability, easy handling, and dishwasher cleaning.
- ✓ Wok Burner: Powerful cooking at up to 4 kW.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.

Optional accessories

Z1365WX0	Wireless food thermometer
Z2471X0	Wok ring
Z9404SE0	4 pieces Set
Z9406SE0	6 pieces Set

Features

Technical Data

Product name/family: .....gas hob w integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Energy input: ..... Gas  
 Number of cooking zones: ..... 5  
 Required niche size for installation (HxWxD): ..... 45 x 560-560 x 480-490 mm  
 Width of the appliance: ..... 752 mm  
 Dimensions: ..... 45x752x520 mm  
 Dimensions of the packed product (HxWxD): ..... 150x790x600 mm  
 Net weight: ..... 18.7 kg  
 Gross weight: ..... 21.2 kg  
 Residual heat indicator: ..... Without  
 Location of control panel: ..... Front  
 Basic surface material: ..... Tempered glass  
 Color of surface: ..... Black  
 Color of frame: ..... Black  
 Length electrical supply cord: ..... 100 cm  
 EAN code: ..... 4242004284659  
 Gas connection rating: ..... 11500 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz



## N 70, GAS HOB, 75 CM, TEMPERED GLASS, BLACK T27PIQ4S0

### Features

#### Design

- tempered glass surface, black
- Two built-in options:
  - Flush installation
  - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

#### Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

#### Burners and power

- 5 burner hob
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 4 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

#### Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- If installed flush, minimum worktop thickness is 30mm.
- Power cord: 1 m
- Connected load: 11.5 KW

N 70, GAS HOB, 75 CM, TEMPERED GLASS, BLACK  
T27PIQ4S0

Dimensioned drawings

