

*N 30, BUILT-IN FRIDGE-FREEZER WITH FREEZER  
AT BOTTOM, 177.2 X 54.1 CM, FLAT HINGE  
KI7851FE0G*



Optional accessories

|          |                          |
|----------|--------------------------|
| KS9E0FZ0 | Package Neff FlexCooling |
| KS6B0RZ0 | Bottle Rack              |
| KSGG0MZ0 | Butter box               |

This No Frost built-in fridge-freezer with Eco Air Flow ensures ideal air circulation in the entire fridge.

- ✓ Fresh Safe – Fridge drawer for dedicated fresh fruit and veg storage.
- ✓ No Frost – No more defrosting your freezer.
- ✓ Eco Air Flow – Even air circulation for constant temperatures and fast cooling.
- ✓ Adjustable Glass Shelves – Height adjustable shelves create the space you need for inspiring dishes in your fridge
- ✓ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge

Features

Technical Data

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Energy Efficiency Class <sup>1</sup> :                               | .....E                   |
| Average annual energy consumption in kilowatt hour per year (kWh/a): | ..... 239 kWh/annum      |
| Sum of volume of frozen compartments:                                | ..... 99 l               |
| Sum of volume of chill compartments:                                 | ..... 150 l              |
| Airborne acoustical noise emissions :                                | ..... 39 dB(A) re 1pW    |
| Airborne acoustical noise emission class:                            | ..... C                  |
| Built-in / Free-standing:                                            | ..... Built-in           |
| Door panel options:                                                  | ..... Not possible       |
| Height:                                                              | ..... 1772 mm            |
| Width of the appliance:                                              | ..... 541 mm             |
| Depth:                                                               | ..... 548 mm             |
| Required niche size for installation (HxWxD):                        | ..... 1775x560x550 mm    |
| Net weight:                                                          | ..... 54.6 kg            |
| EAN code:                                                            | ..... 4242004278436      |
| Fuse protection:                                                     | ..... 10 A               |
| Door hinge:                                                          | ..... Right reversible   |
| Voltage:                                                             | ..... 220-240 V          |
| Frequency:                                                           | ..... 50 Hz              |
| Length electrical supply cord:                                       | ..... 230 cm             |
| Number of compressors:                                               | ..... 1                  |
| Number of independent cooling systems:                               | ..... 1                  |
| Interior ventilator:                                                 | ..... No                 |
| Reversible Door Hinge:                                               | ..... Yes                |
| Number of Adjustable Shelves in fridge compartment:                  | ..... 2                  |
| Shelves for Bottles:                                                 | ..... No                 |
| Frost free system:                                                   | ..... Fridge and freezer |
| Installation typology:                                               | ..... Full-integrated    |



<sup>1</sup> Scale of Energy Efficiency Classes from A to G

*N 30, BUILT-IN FRIDGE-FREEZER WITH FREEZER  
AT BOTTOM, 177.2 X 54.1 CM, FLAT HINGE  
K17851FEOG*

## Features

### Performance and Consumption

- EU19\_EEK\_D: E
- Total Volume : 249 l
- Annual Energy Consumption: 239 kWh/a
- Noise Level : 39 dB

### Functions

- Bright interior LED fridge light
- Built-in fridge/freezer

### Design features

- noFrost freezer, never have to defrost ever again
- EU19\_Fast freezer facility\_D: yes
- Electronic control (LED chain)
- SuperCool function with automatic deactivation
- optical and acoustical
- Automatic defrost fridge

### Design features

- 3 safety glass shelves of which 2 are height adjustable
- Door shelves in fridge door: 1 large and 1 small

### Freshness System

- 1 FreshSafe drawer- The ideal place to store your fruit and vegetables safely.

### Food freshness system

- Net Freezer Volume : 99 l
- Freezing capacity 24h : 5.5 kg
- Temperature rise time : EU19\_Temperature rise time\_D: 10 H
- 4 freezer drawers

### Dimension and installation

- Dimensions: 177.2 cm H x 54.1 cm W x 54.8 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

### Key features - Fridge section

- Right hinged door, reversible
- Length of power cord: 230 cm
- Climate Class: SN-ST
- 220 - 240 V

### Key features - Freezer section

- 2 x ice cube tray

### Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

### Design features



### Dimension and installation

### Additional features

N 30, BUILT-IN FRIDGE-FREEZER WITH FREEZER  
AT BOTTOM, 177.2 X 54.1 CM, FLAT HINGE  
K17851FE0G

# Dimensioned drawings

## measurements in mm

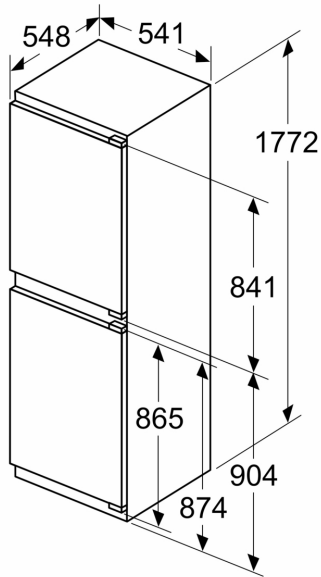

### Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ Weight


A: Appliance door height including hinges in mm

B: Undamped hinge, unit front in kg


C: Damped hinge, unit front in kg

D: Additional possible load in kg with heavy load kit

| A         | B  | C  | D         |
|-----------|----|----|-----------|
| 1500-1750 | 22 | 22 |           |
| 720-1400  | 19 | 19 | B+5 / C+5 |
| A1        | 15 | 19 |           |
| A2        | 15 | 19 |           |

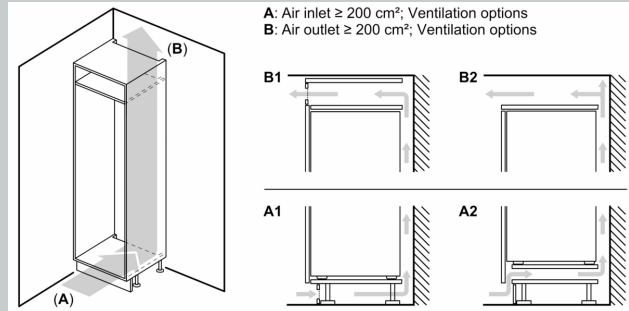


A: Air inlet  $\geq 200 \text{ cm}^2$ ; Ventilation options  
B: Air outlet  $\geq 200 \text{ cm}^2$ ; Ventilation options

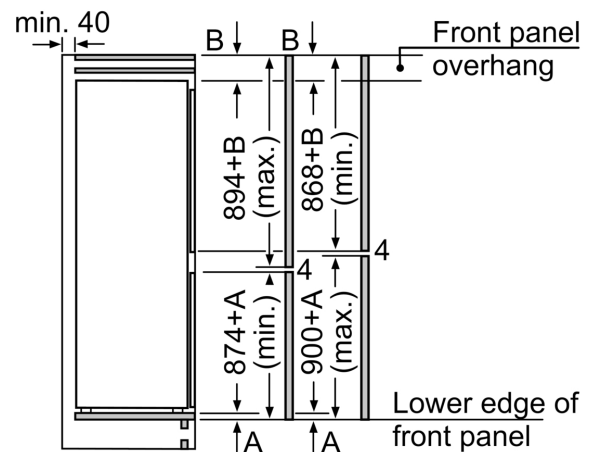


The specified unit door dimensions  
are valid for a door gap of 4 mm.

measurements in mm

# Dimensioned drawings

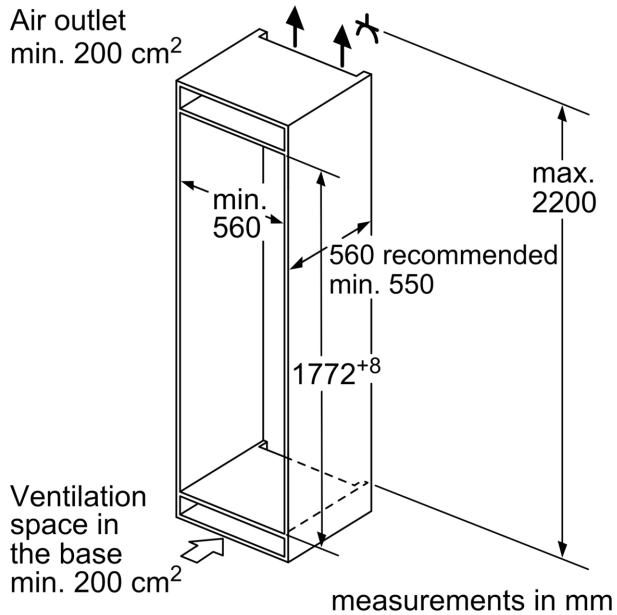

## measurements in mm Recommended gap dimensions for flat hinges



| F     | R   | X   |
|-------|-----|-----|
| 16-19 | 0-3 | 2.5 |
| 20    | 0-1 | 3   |
|       | 2-3 | 2.5 |
| 21    | 0-1 | 3   |
|       | 2-3 | 2.5 |
| 22    | 0   | 4   |
|       | 1   | 3.5 |
|       | 2-3 | 3   |

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.