

*N 70, BUILT-IN COMPACT OVEN WITH  
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS  
STEEL  
C17MR02N0B*



Compact built-in oven with integral microwave - even more ways to cook quickly and conveniently in a very small space.

- ✓ CircoTherm – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Combined microwave and oven - the convenient solution to save space and time
- ✓ Soft Close with Soft Opening - the damping system cushions the door for gentle opening and closing

Type of micro-wave oven: ..... MW-Combi  
Color / Material Front: ..... Stainless steel  
Built-in / Free-standing: ..... Built-in  
Door opening: ..... Handle  
Door colour: ..... Black  
Integrated Cleaning system: ..... No  
Control Panel Material: ..... Glass  
Dimensions: ..... 455x596x548 mm  
Dimensions of the packed product (HxWxD): . 530 x 670 x 680 mm  
Min. required niche size for installation (HxWxD): .....450-455 x 560-568 x 550 mm  
Cavity dimensions: ..... 237.0 x 480 x 392.0 mm  
Cavity capacity: ..... 45 l  
Maximum micro-wave power: ..... 900 W  
Number of interior lights: ..... 1  
Net weight: ..... 35.3 kg  
Gross weight: ..... 37.6 kg  
EAN code: .....4242004182177  
Connection Rating: ..... 3600 W  
Fuse protection: .....16 A  
Voltage: .....220-240 V  
Frequency: ..... 60; 50 Hz  
Length electrical supply cord: ..... 150.0 cm

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ60X0 SeamlessCombination 45 + 14cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z13CV06S0 Decor strip, Z14CR10X0 Baking and roasting grid (microwave), Z1913X0 Baking Stone



N 70, BUILT-IN COMPACT OVEN WITH  
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS  
STEEL  
C17MR02N0B

#### Heating Functions

- Compact oven with microwave with 6 PCh heating methods:
- CircoTherm
- Full surface grill CircoTherm Eco Centre area grill CircoRoasting Pre-Heating
- Additional heating methods with microwave:
- Microwave, 5 power levels
- combi microwave constant
- Temperature range 30 °C - 275 °C
- Max. Power: 900 W; 5 Microwave power settings (90 W, 180 W, 360 W, 600 W, 900 W) with Inverter (MW)
- Intelligent inverter technology: maximum output power will be regulated to 600 W when used in longer operation

#### Design

- Cavity volume: 45 l
- Anthracite enamel cavity with 3 shelf positions

#### Convenience

- 2.5" colour and text display with ShiftControl
- Automatic Temperature control for each function
- Temperature control and display on screen Residual heat indicator automatic programming
- Built in cooking functions: Automatic programs: Select a program, enter the weight of your food, and the automatic program will apply the most optimal settings, no manual settings required
- automatic programming, 14 automatic programs
- Electronic clock
- Rapid heat-up: Reduce the preheat time at the touch of a button
- Independent oven interior light button, LED lighting
- Cooling fan
- Stainless-steel fan
- Individual adjustable child lock
- Residual heat indicator Safety switch off Start button door contact switch


#### Accessories

- 1 x Universal pan, combination grid


#### Technical Information

- Length of mains cable: 150 cm
- Total connected load electric: 3.6 KW
- Appliance dimension (HxWxD): 455 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing


N 70, BUILT-IN COMPACT OVEN WITH  
MICROWAVE FUNCTION, 60 X 45 CM, STAINLESS  
STEEL  
C17MR02N0B

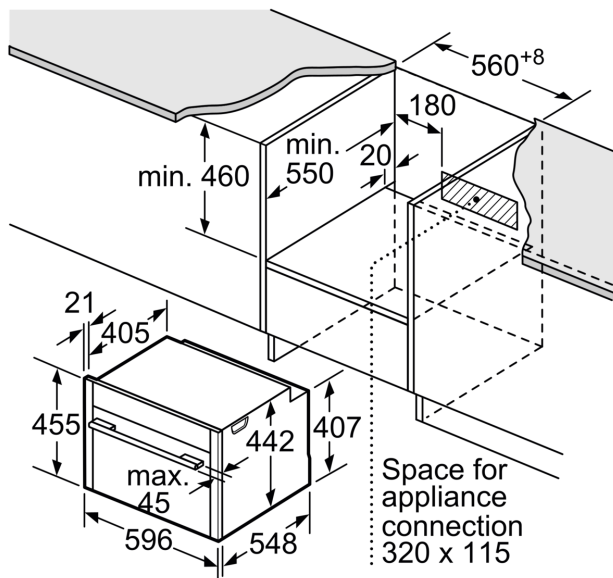

measurements in mm

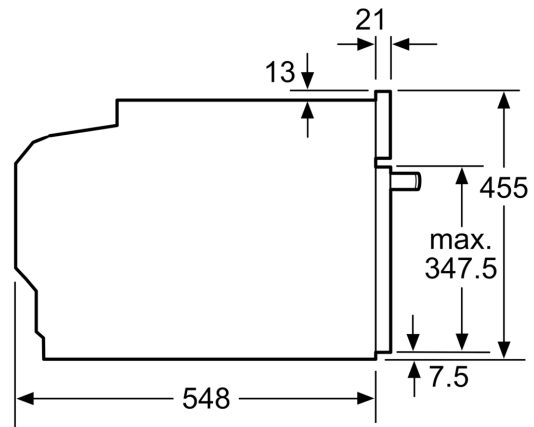


measurements in mm

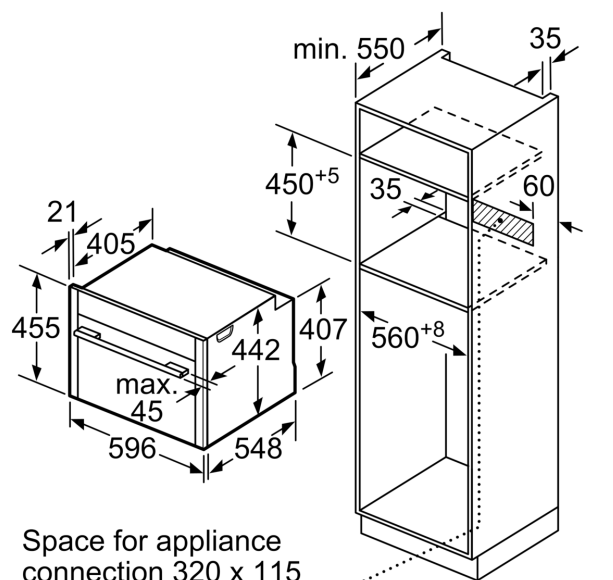

measurements in mm

Installation with a hob.

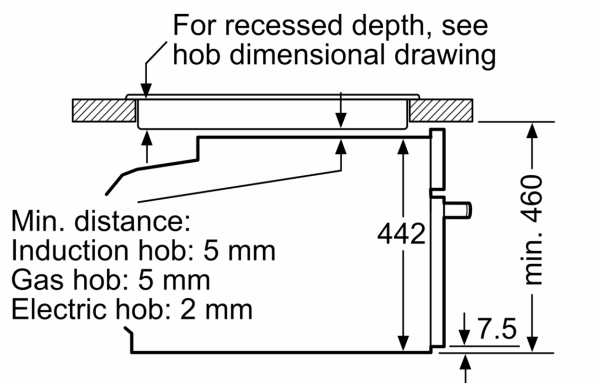

measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm