


N 90, Induction hob, 90 cm, Black  
T59TS61N0



COOKING PASSION SINCE 1877

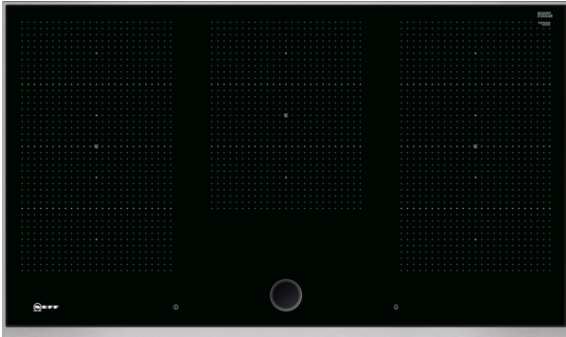

Standalone FlexInduction cooktop with TwistPad® Fire control.

- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓ The TwistPad® Fire is a removable, magnetic, illuminated control knob that gives you precise, convenient control over all cooking zones. And to make things even easier, only the selectable functions are illuminated.
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ FryingSensor - The FryingSensor with 5 selectable temperature settings monitors the set temperature and holds it steady. So there's no more burning.
- ✓ Stainless-steel flush-fitted trim



Features

Technical Data

Product name/family : Cooking zone ceramic  
 Construction type : Built-in  
 Energy input : Electric  
 Total number of positions that can be used at the same time : 5  
 Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500  
 Width of the product (mm) : 918  
 Dimensions of the product (mm) : 51 x 918 x 546  
 Dimensions of the packed product (HxWxD) (mm) : 126 x 1073 x 603  
 Net weight (kg) : 21.405  
 Gross weight (kg) : 23.0  
 Residual heat indicator : Separate  
 Location of control panel : Hob front  
 Basic surface material : Ceramic  
 Color of surface : Black, Stainless steel  
 Color of frame : Stainless steel  
 Approval certificates : AENOR, CE  
 Length electrical supply cord (cm) : 110  
 EAN code : 4242004189374  
 Electrical connection rating (W) : 11100  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60

Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z9442X0	Set of 3 pots and 1 pan



# N 90, Induction hob, 90 cm, Black

T59TS61N0

## Features

### Design

- 90 cm width
- Design frame
- 5 induction zones
- Powerboost function for each cooking zone

### Flexibility

- 3 Flex zones
- PowerMove

### Comfort


- Can be combined with all hobs in comfort design
- 17 - stage power setting for each cooking zone
- Residual heat indicator: Digital 2-step
- Time with time programming functions  
Alarm clock
- Automatic pan recognition sensor  
Power management function  
Automatic Safety switch-off  
Control panel lock  
Wipe protection function
- FryingSensor with 5 temperature settings
- Power ON indicator
- Spill protection

### Technical information

- Installation measurements: 880 mmx490 mm
- Min. worktop thickness: 30 mm
- 11.1 kW total connected load
- Length wire connection: 110 cm
- Cooking zones:  
1 x Ø 400 mmx240 mm, 3.3 KW (max. Power level 3.7 KW)  
Induction or 2 x Ø 240 mm, 2.2 KW (max. Power level 3.7 KW)  
Induction;  
1 x Ø 300 mmx240 mm, 2.6 KW (max. Power level 3.7 KW)  
Induction;  
1 x Ø 400 mmx240 mm, 3.3 KW (max. Power level 3.7 KW)  
Induction or 2 x Ø 240 mm, 2.2 KW (max. Power level 3.7 KW)  
Induction


N 90, Induction hob, 90 cm, Black  
T59TS61N0

Dimensioned drawings

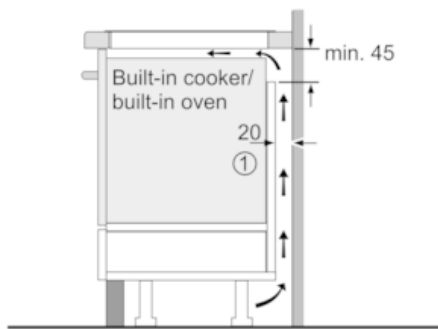


① Ventilation gap must be present

All measurements in mm

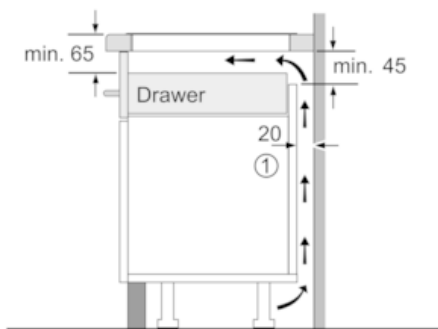

① Ventilation gap must be present.

Measurements in mm

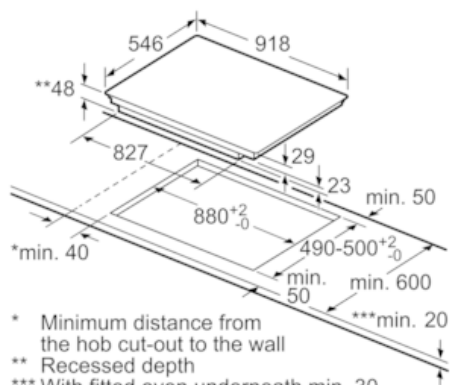

\* Minimum distance from the hob cut-out to the wall  
 \*\* Recessed depth  
 \*\*\* With fitted oven underneath min. 30, possibly more; see space requirements for the oven

measurements in mm